

Reactor Design Compilation

Zoe Richter
zrichte2@illinois.edu

July 2, 2019

1 Introduction

Molten salt reactors, or MSRs, are a hopeful candidate for the next line of commercial nuclear reactors. However, there is a lack of experimental data and real-world experience compared to the light-water reactors that make up much of the world's current fleet.

This report seeks to collect various MSR designs and reprocessing techniques, provide an idea of the range of MSR features. The intent is to capture the expected varieties of fluid-fueled MSRs such that models and simulations can accommodate a broad range of designs. The features given in this review include characteristics such as:

- Single fluid or two fluid salt
- Single or multi-region core
- Neutron energy spectrum
- Moderator type
- Salt type (relates to single or two-fluid)
- Intensity of processing

The processing methods for each reactor will also be given, in as much detail as possible. The goal is to collect information of possible MSR processing methods in one place, and, to give a better idea of the general trends in fuel-processing methodologies.

To begin, take note of [6] and [9]. These articles are not specific designs, instead, they give a general history of US MSR technology up to approximately 1980. *The Molten Salt Adventure*, [6], in particular, is a personal account of the author's experience in the growing field, and offers interesting insight.

2 Molten Salt Reactor Experiment (MSRE)

This reactor is given as the first MSR design. Technically, the Aircraft Reactor Experiment is its predecessor, however, given its unsuitability as a commercial reactor (and the focus of this report on such reactors) it is not included in detail here. The MSRE has general characteristics, described thusly: [7]

MWth	10
MWe	Not Given
Spectrum	Thermal
Core Inlet Temperature	635 C
Core Outlet Temperature	663 C
Pressure	0.14 MPa

- Single-region
- Fuel salt is a mix of lithium, beryllium, and zirconium fluoride salts, using either uranium or uranium and thorium. Specifics of the composition are given in Table 2.1 of [7].
- Total core volume is 90 cubic feet. 20 cubic feet is fuel, 70 cubic feet is graphite.
- Graphite matrix is set in a rectangular grid, with 6 holes taken out to hold control rods.

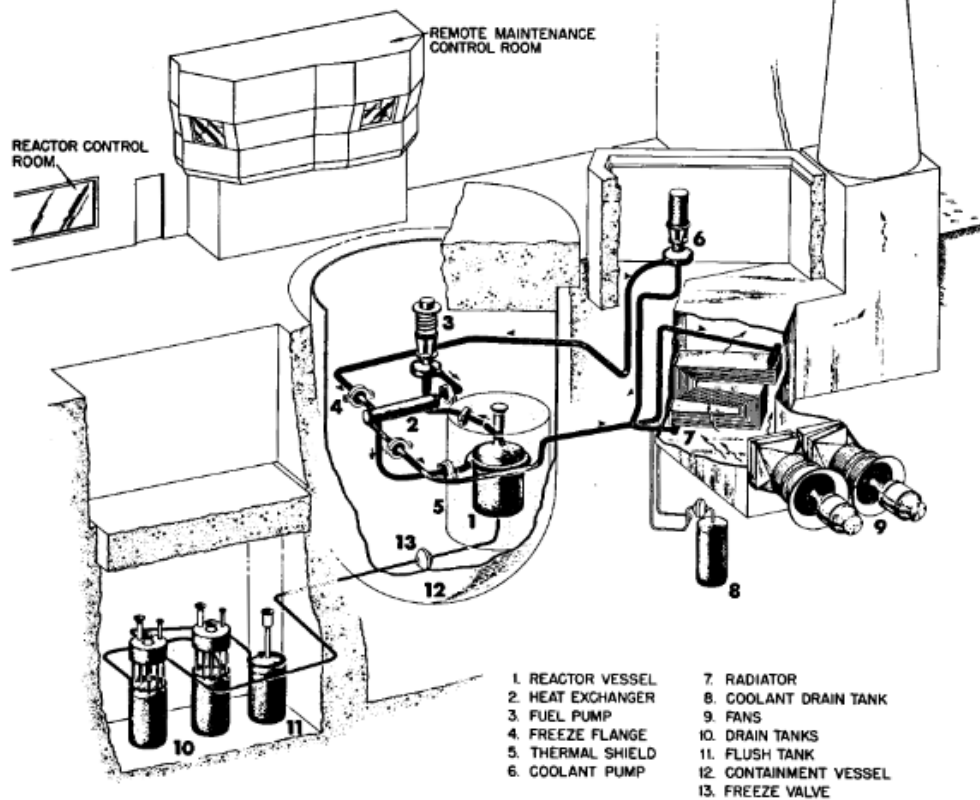


Fig. 2.1. MSRE Flow Diagram.

Figure 1: An image of the reactor building setup, from [7] directly

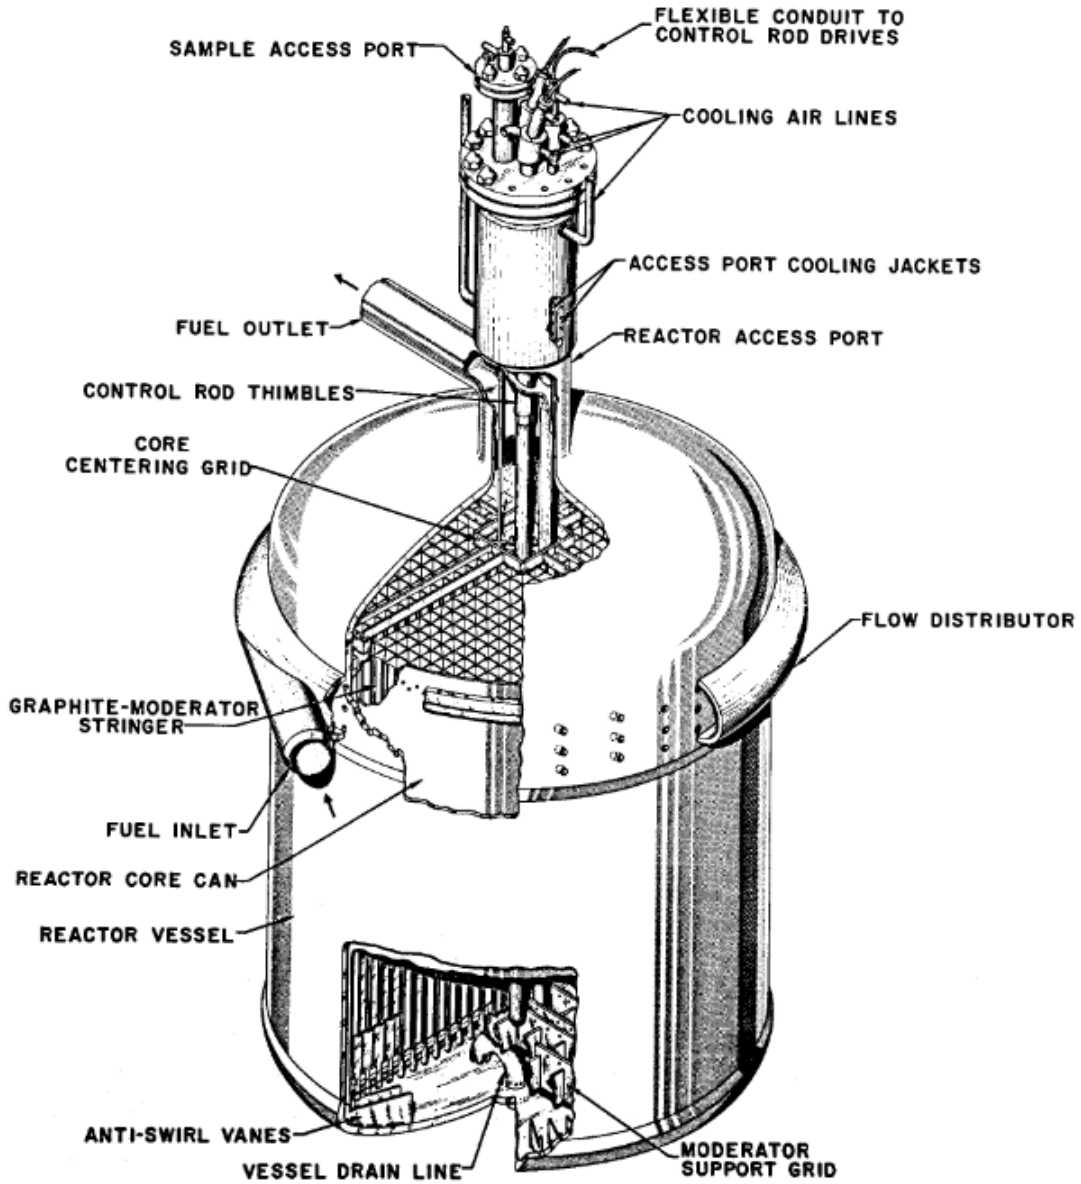


Fig. 2.2. Reactor Vessel.

Figure 2: An image of the reactor core, from [7] directly

Fuel-Moderator Ratio	22.4-77.6
Coolant	$LiFBeF_2$
Moderator	Graphite
Fuel Composition	2, 3, 4

The fuel processing in the MSRE is relatively straight-forward. The helium cover gas used in the pump bowl will remove fission product gases. Beyond the off-gas system, and further fuel processing is done batch-wise, not as part of the fuel loop. This fuel processing system can:

- Treat batches of oxygen-contaminated fuel salts with a H_2F gas to remove the oxygen

- Can perform fluorination on batches of fuel salts. This will separate the uranium from the salt mixture. From this point, the salt is either sent to waste, or kept, and a new fuel is added to the batch. This allows for both "cleaning" the fuel, or changing its composition considerably, in large quantities.

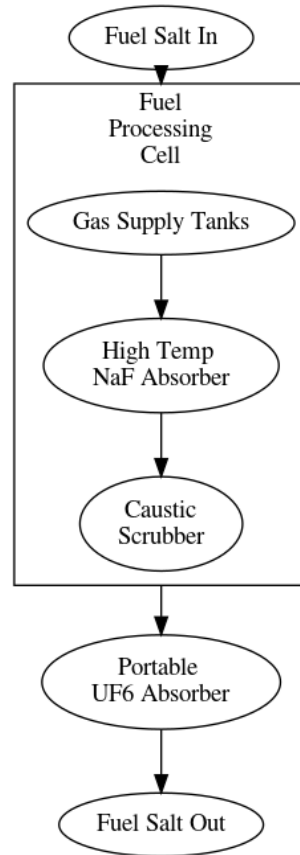


Figure 3: A diagram of the fuel-processing cell of the MSRE

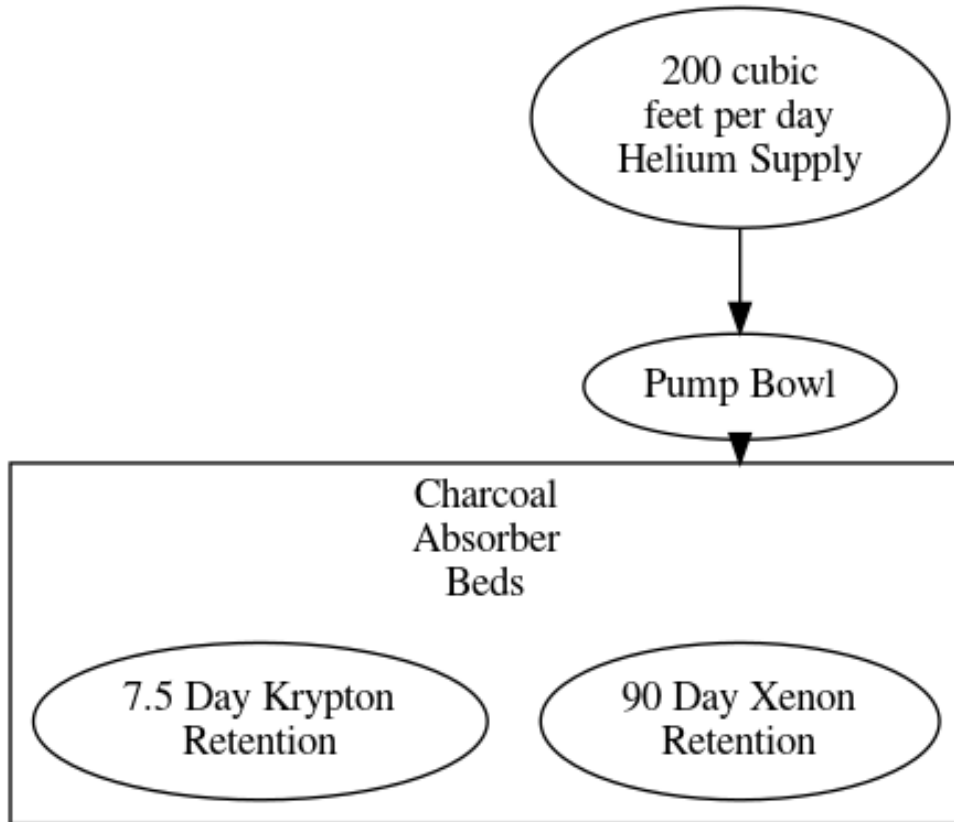


Figure 4: The off-gas system of the MSRE

3 Molten Salt Breeder Reactor (MSBR)

The MSBR builds on the MSRE, adding a conversion ratio high enough to classify the MSBR as a true breeder reactor. It features a higher power in its design specifications, at the cost of a low graphite lifetime. Additionally, it has a lesser fuel vol% than the MSRE, and two fewer control rods.

MWth	2250
MWe	1000
Spectrum	Thermal
Core Inlet Temperature	566 C
Core Outlet Temperature	704 C
Pressure	0.52 MPa

- Thermal plant efficiency of 44%
- Average core power density is approximately 22kW/liter, with a plant factor of 80%. This gives:
 - A four year graphite lifetime
 - A fuel yield of 3.3%
 - A compounded fuel doubling time of 21 yr
- Reactor vessel is approximately 22ft in diameter and 20 ft high.
- Core is 14.3ft in diameter and 13ft high

- Graphite matrix is a rectangular grid with 4 control rod slots in the center.

Fuel-Moderator Ratio	13-87
Moderator	Graphite
Fuel Composition	5
Secondary Salt*	$NaBF_4 - NaF$

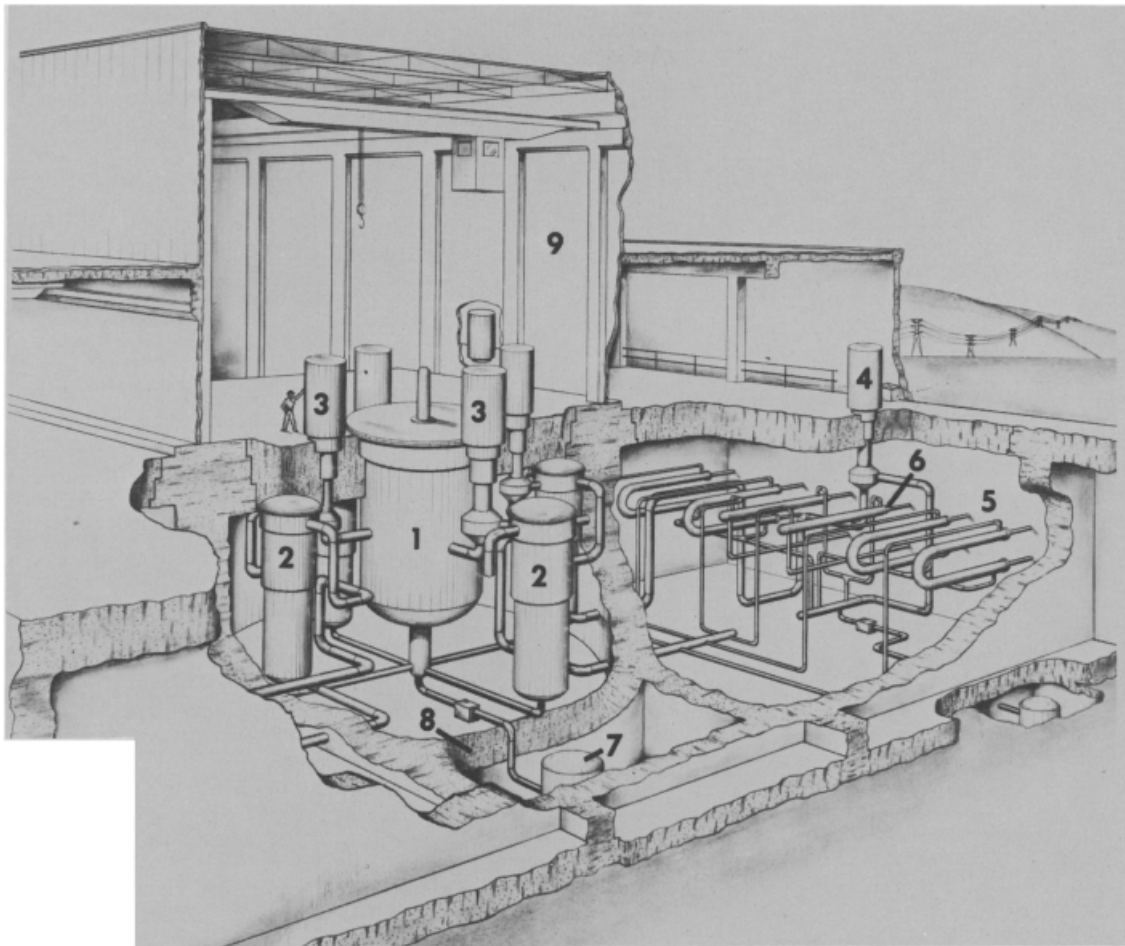


Fig. 3. Cutaway perspective of MSBR reactor and steam cells. (1) Reactor, (2) Primary heat exchangers, (3) Fuel-salt pumps, (4) Coolant-salt pumps, (5) Steam generators, (6) Steam reheaters, (7) Fuel-salt drain tank, (8) Containment structure, (9) Confinement building.

Figure 5: An image of the reactor and steam systems, from [2]

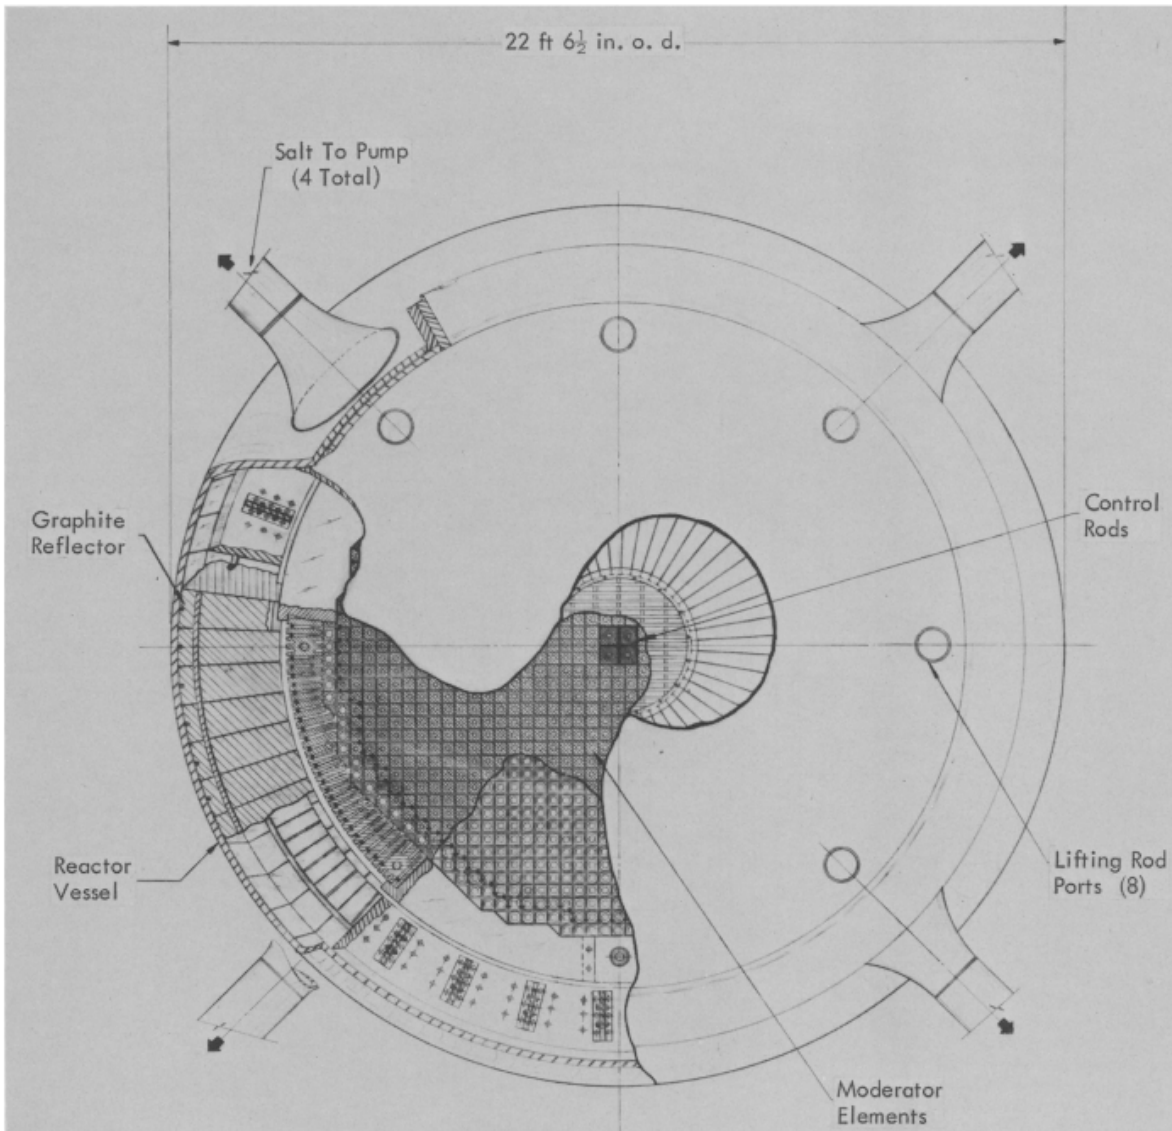


Fig. 5. Top cut-away view of reactor vessel for MSBR 1000 MW(e) station.

Figure 6: A bird's eye view of the reactor core, from [2]

The chemical processing is more involved than the MSRE, and includes:

- An off-gas system to remove gaseous fission products, using helium spargers.
- A continuous chemical processing loop to:
 - Remove fission products
 - Recover bred ^{233}U
 - Add more fertile material, as needed.

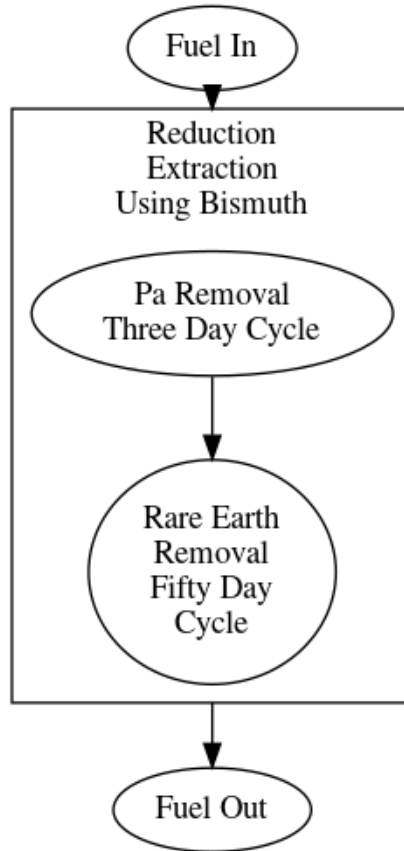


Figure 7: Material Flow in the MSBR Fuel-Processing Cell

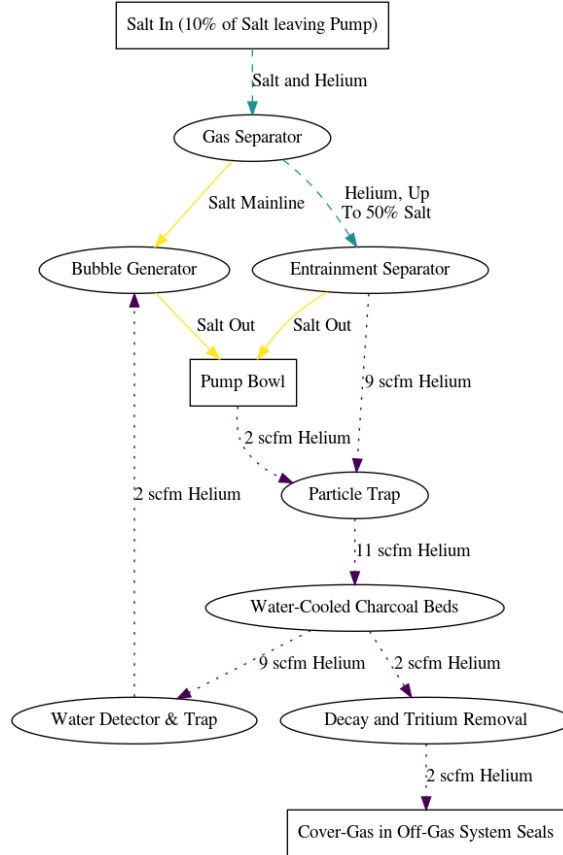


Figure 8: The off-gas system in the MSBR

4 Molten Salt Demonstration Reactor (MSDR)

A reactor concept from ORNL, hoping to build on the MSRE and show the commercial capabilities of an MSR. The intention is to show the feasibility of a breeder MSR, however, the MSDR's conversion ratio isn't high enough to technically be a breeder. Instead, it is a converter [1]. One difference of note between the MSDR and the MSBR is that the MSDR maintains a low enough power density that the graphite moderator is expected to last 30 years. This is in stark contrast to the MSBR, which operates at a higher power density, and only anticipates a 4 year graphite lifetime.

MWth	750
MWe	350
Spectrum	Thermal
Core Inlet Temperature	566 C
Core Outlet Temperature	677 C
Pressure	Not given explicitly. Assume pressure drop of 0.03 MPa across reflectors. Nothing in source to indicate core vessel pressure differs significantly from predecessors.

- Peak power density 114 W/cc
- Reactor vessel is 26ft tall and 26ft in diameter
- FLiBe salt, initially using ^{235}U , that uses thorium to breed ^{233}U

- solid graphite slabs for reflector, arranged in an axial/ radial matrix. Six slots in the matrix for control rods.

ORNL DWG 72-2826

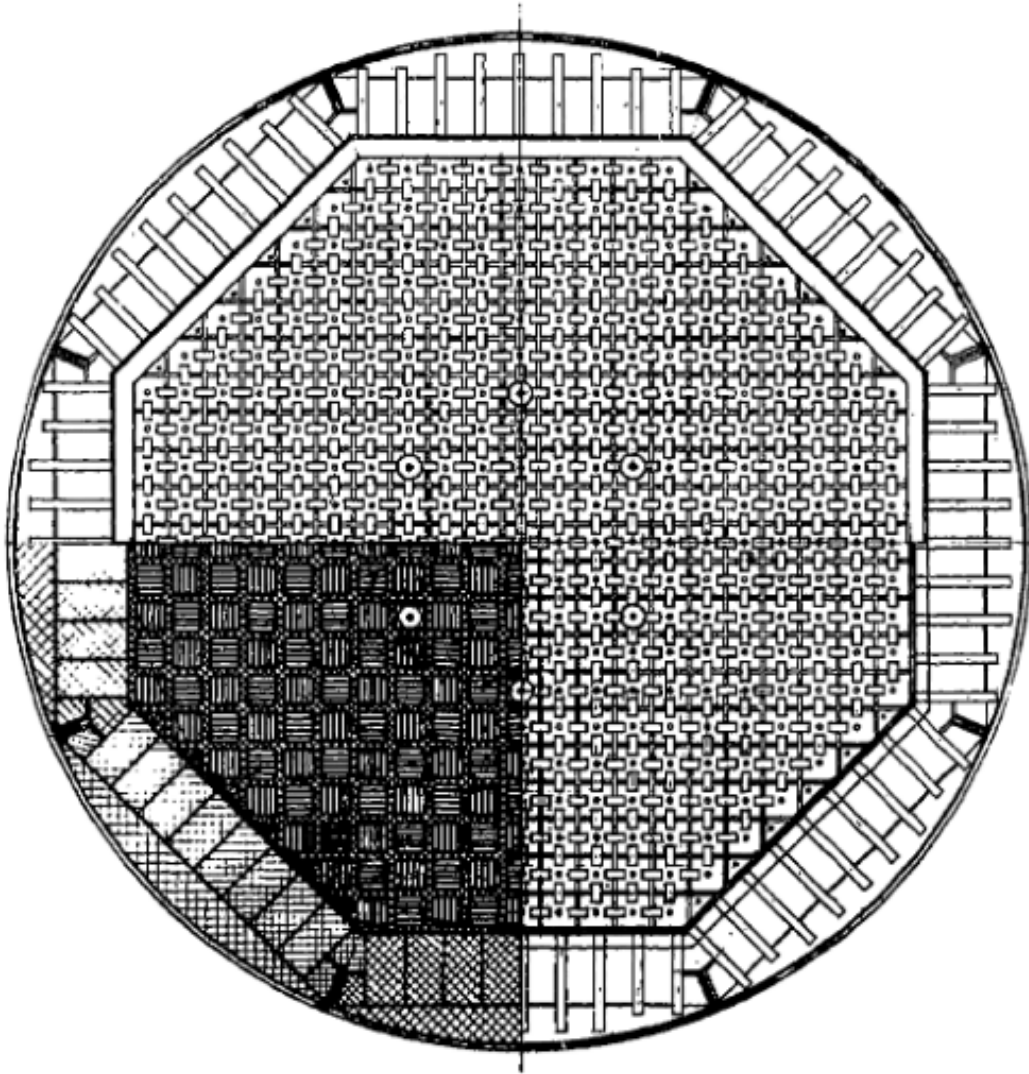


Fig. 6. Reactor Core and Reflector Plan.

Figure 9: The layout of the reactor core, from [1]

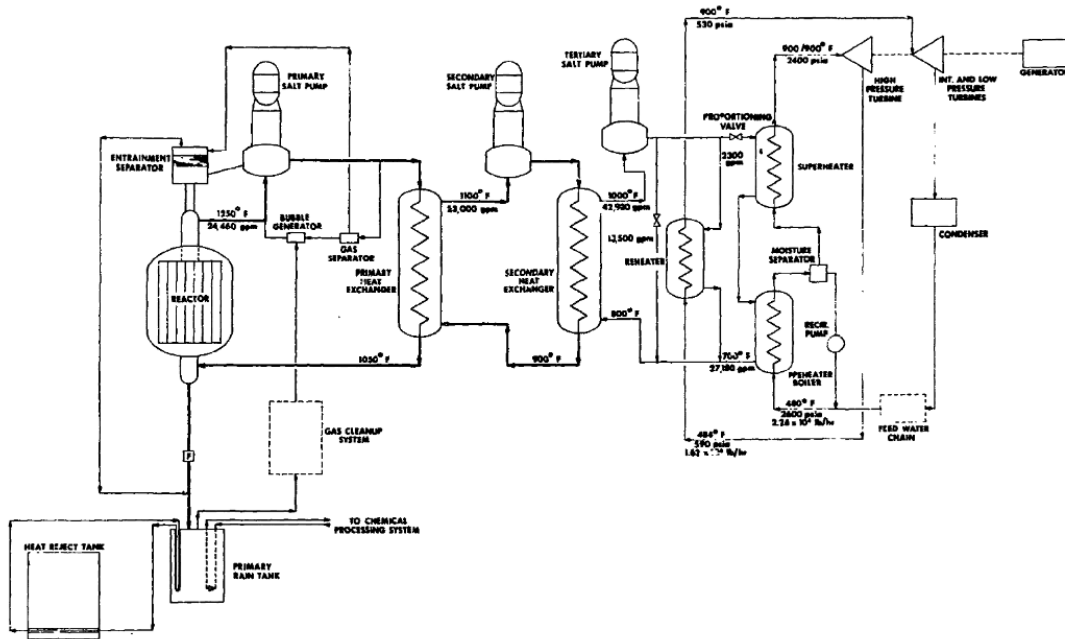


Fig. 1. Simplified Flowsheet for 300-MW(e) Molten-Salt Demonstration Reactor.

Figure 10: Layout of the reactor, steam generation, and (most) of the salt processing, from [1]

Fuel-Moderator Ratio	10-90
Coolant	$LiFBeF_2$
Moderator	Graphite
Fuel Composition	6

The processing used in this reactor is minimal, and is intentionally limited to what was used in the MSRE. All salt processing is as follows:

- A Hitec salt loop oxidizes tritium in the fuel salt into tritiated water for removal
 - This salt loop goes to the heat exchanger for steam generation
- Xenon and other fission product gases are removed via an off-gas system
- Other fission products are not removed from the salt in a short time scale. Instead, the salt is replaced every 8 years. Fissile materials are taken from "spent" salt, where possible.

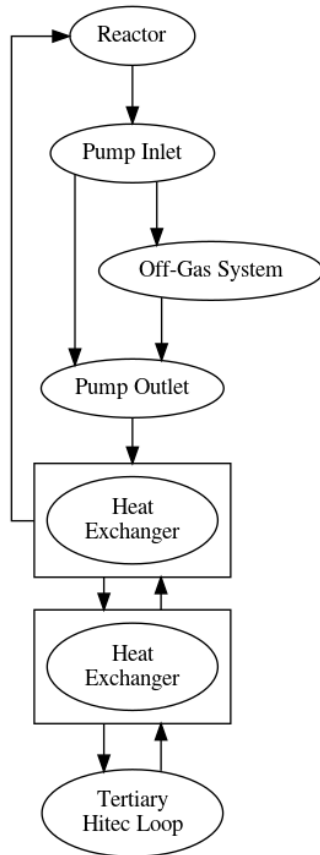


Figure 11: An overview of the fuel processing in the MS DR design

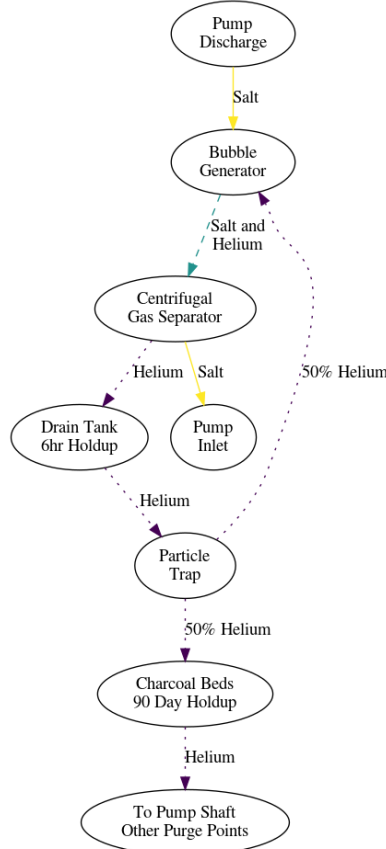


Figure 12: The MSDR's off-gas system

5 Denatured Molten Salt Reactor (DMSR)

This reactor is heavily based on the MSBR. In fact, the design is mostly identical, except the DMSR does not remove fission products during the 30 year lifetime of design. It does however, include helium sparging and some limited chemical processing to maintain salt quality. This particular design is prompted by guidance given in 1976 by what is now the DOE, along with reports that concluded a breeder reactor without denatured fuel would not be able to be deployed worldwide, due to insufficient proliferation resistance. [4]

The basic core parameters are as follows:

MWth	2250
MWe	1000
Spectrum	Thermal
Core Inlet Temperature	566 C
Core Outlet Temperature	704 C
Pressure	Not given

- Low power density to give the graphite moderator a 30 year lifetime.
 - Low power density also reduces neutron capture in ^{233}Pa , to bolster nonproliferation
- Uses 20% enriched ^{235}U to reach initial criticality.
- Like the MSBR, uses $\text{LiF} - \text{BeF}_2 - \text{ThF}_4 - \text{UF}_4$ salt (with the above change in fissile isotope)
- This reactor vessel is 10m in both height diameter, with the following core specifications:

- The core is 8.3m in height and diameter.
 - * The outer 95% of the core volume, core B, has a salt volume of 12.94%
 - * The inner 5% of the core, core A, has a salt volume of 20%
- Table 9 and Table 10 in [4] give isotope concentrations and neutron utilization, as calculated for a few points in the reactor lifetime.

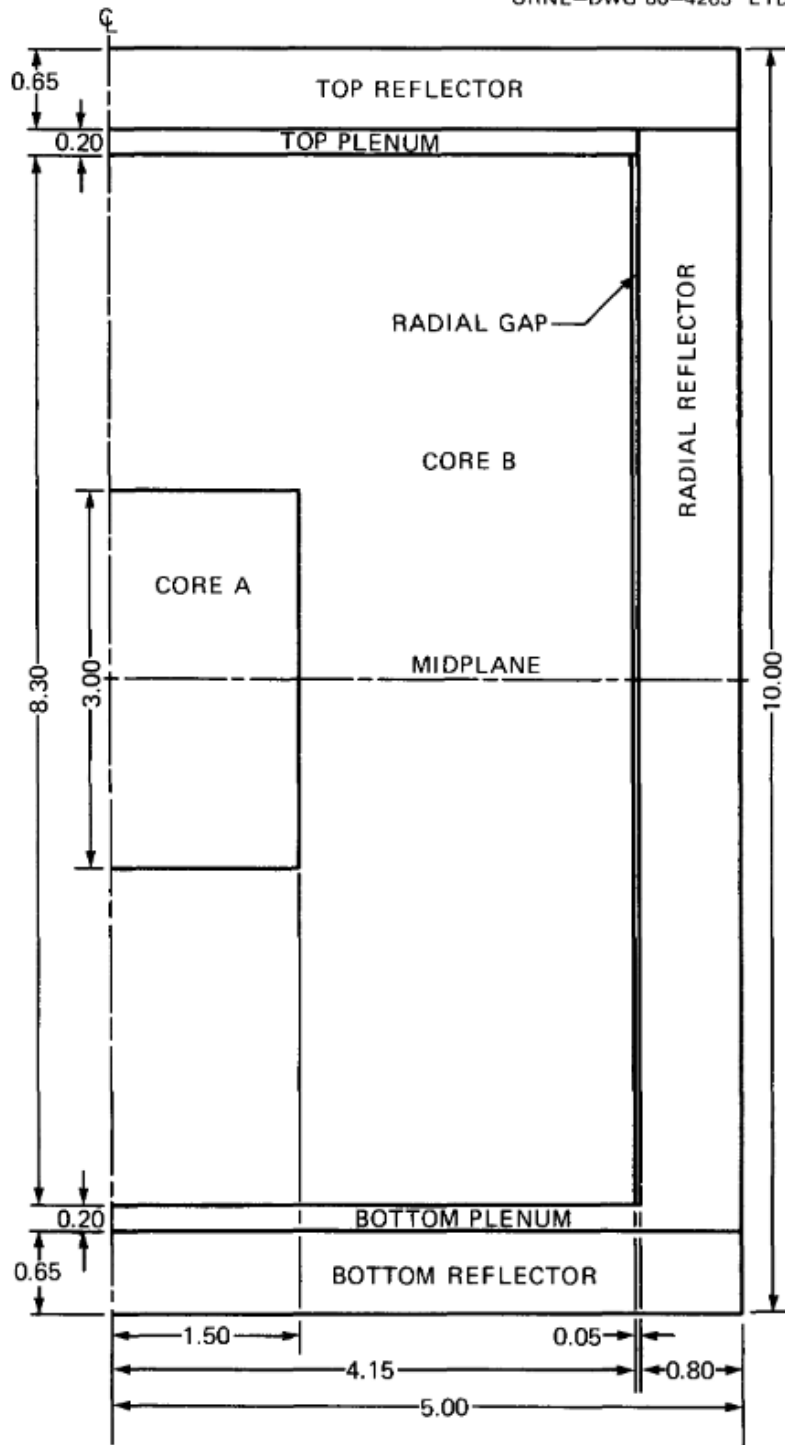


Fig. 2. DMSR core model for neutronic studies - cylindrical geometry (all dimensions in meters).

Figure 13: A cut-away view of the core, from [4]

Fuel-Moderator Ratio: Inner Core	20-80
Fuel-Moderator Ratio: Outer Core	12.94-87.06
Coolant	$LiFBeF_2$
Moderator	Graphite
Fuel Composition	7

As stated previously, the reprocessing in this design is purposefully limited in order to improve the fuel cycle's proliferation resistance. The design includes an off-gas system, which will remove gaseous fission products. Aside from this, however, the only other treatment the fuel receives is what is necessary to keep oxygen-contamination to a minimum, and to maintain the proper levels of fissile isotopes within the fuel. The DMSR does not include the liquid-metal reduction-extraction commonly seen in previous designs, and does not, at any point, separate protactinium. The design assumes noble metals will leave the fuel by plating out on the piping.

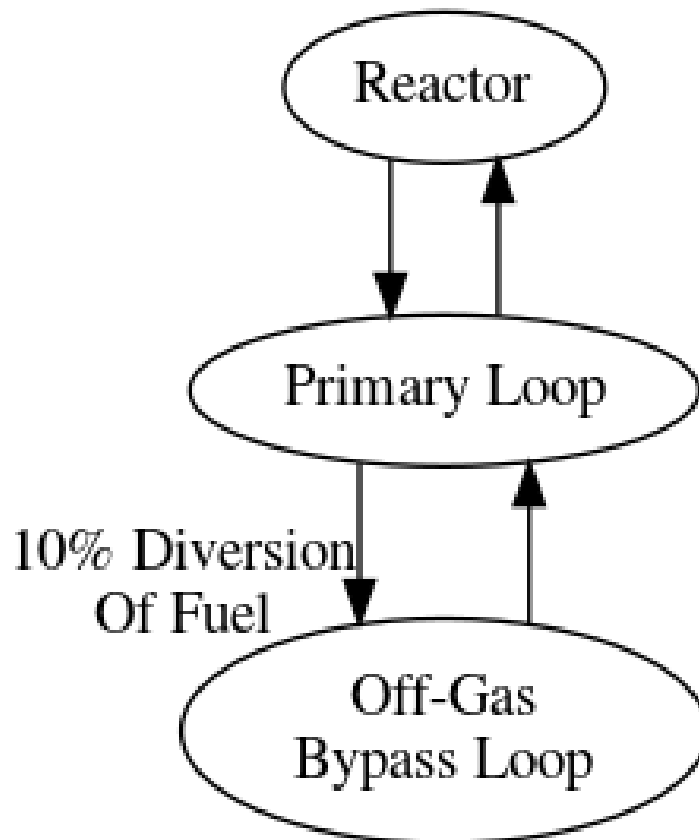


Figure 14: The diversion of salt to the off-gas system

6 Integral Molten Salt Reactor (IMSR)

The IMSR400 is a small modular reactor (SMR) patented by Terrestrial Energy Inc. The "core-unit" consists of the reactor vessel, and integrated pumps and heat exchangers. The core-unit has a lifetime of 7 years, but is made to be easily replaced, giving the designed plant an expected lifetime of 30 years. Some specifics of this reactor, such as the fuel-coolant mixture, is proprietary, and explicit detail is not given. What information is publicly available is as follows [5]:

MWth	400
MWe	188
Spectrum	Thermal
Core Inlet Temperature	647 C
Core Outlet Temperature	685 C
Pressure	0.4 MPa

- Average core power density of 11-15 $\frac{MW}{m^3}$
- Core is 4m in height, and 3.4m in diameter.
- The length of each fuel cycle is 84 months, i.e., the 7-year lifetime of the core-unit
- The moderator is graphite, the shutdown rods are made of gadolinium oxide, and it does not have control rods
- At the time of discharge, the average burnup is 26-29 MWd/kg
- The salt mixture is a blend of fluoride salts, including sodium fluoride, beryllium fluoride, and lithium fluoride. At startup, the fuel has an enrichment of 2-3%, and an enrichment of 5-19% when used fissile material is replaced

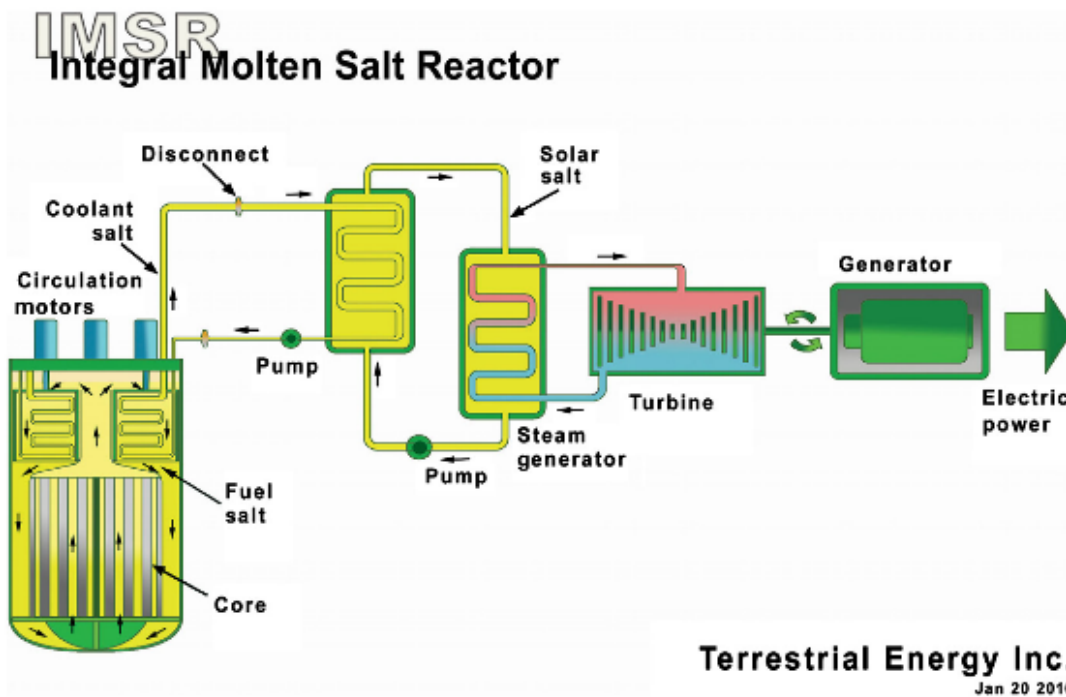


Figure 18.2 IMSR400 main heat transport paths for power generation.

Figure 15: A simplified view of the core-unit, and its attachment to the power generation loops, from [5]

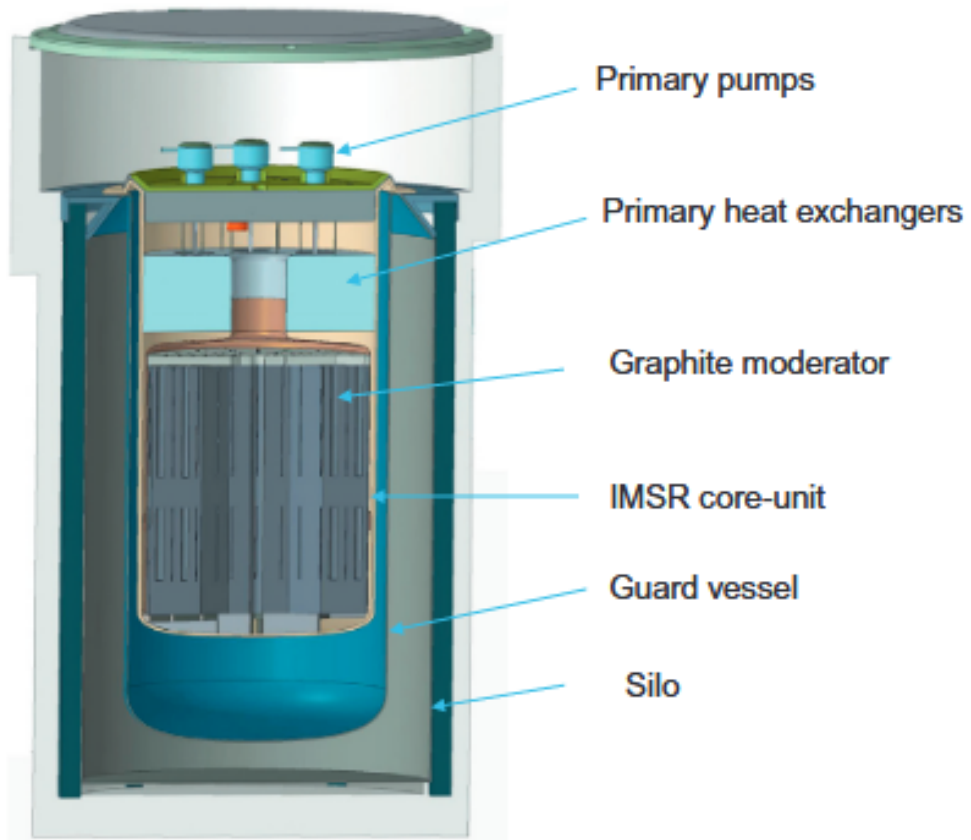


Figure 18.3 Core-unit and guard vessel in one of the two reactor silos.

Figure 16: The core, from [5]

Fuel-Moderator Ratio	Not Given
Coolant	"Fluoride Salt"
Moderator	Graphite
Fuel Composition	"Fluoride Fuel Salt"


7 Molten Salt Fast Reactor (MSFR)

Of the reactors given in this review, this is the only one using the fast spectrum (certainly, other fast-MSRs exist, but may not necessarily be interesting from a fuel-processing stand point). Because such a reactor does not use a moderator, it circumvents some of the material constraints associated with degradation of the graphite moderator. It also has a much higher breeding ratio. This report uses a conceptual reference reactor with these characteristics [10]:

MWth	3000
MWe	1500
Spectrum	Fast
Core Inlet Temperature	625 C
Core Outlet Temperature	730 C
Pressure	Not Given

- Three loops: the fuel, intermediate, and power conversion loops

- Within the fuel circuit, there is a total salt volume of 18 cubic meters
 - The fuel salt is lithium fluoride and actinide fluoride, with the mol% of the actinide fluorides is assumed to be a fixed 22.5 mol%
- Within the core, there is a fertile isotope blanket region, composed of a $LiF - ThF_4$ blend that has a concentration of ThF_4 of 22.5 mol%
- The blanket serves as the radial reflectors, to protect the reactor vessel. On the top and bottom, there are reflectors made of nickel-based alloys. This particular report also assumes this alloy will absorb 99% of incoming neutrons.
- The design initially used a very simple cylindrical geometry for the core, but by the time the report was written, the study moved on to more realistic, and complicated, geometries.
 - The first geometry is referred to as Geometry I. The radial core walls are curved, along with the top reflector. The bottom reflector is flat
 - The second Geometry, Geometry II, features symmetrically curved walls within the core. Both this and Geometry I are given in ?? below.
- Helium sparging is assumed, but because its impact and the thermal-hydraulic properties was deemed negligible, it is neglected in calculations

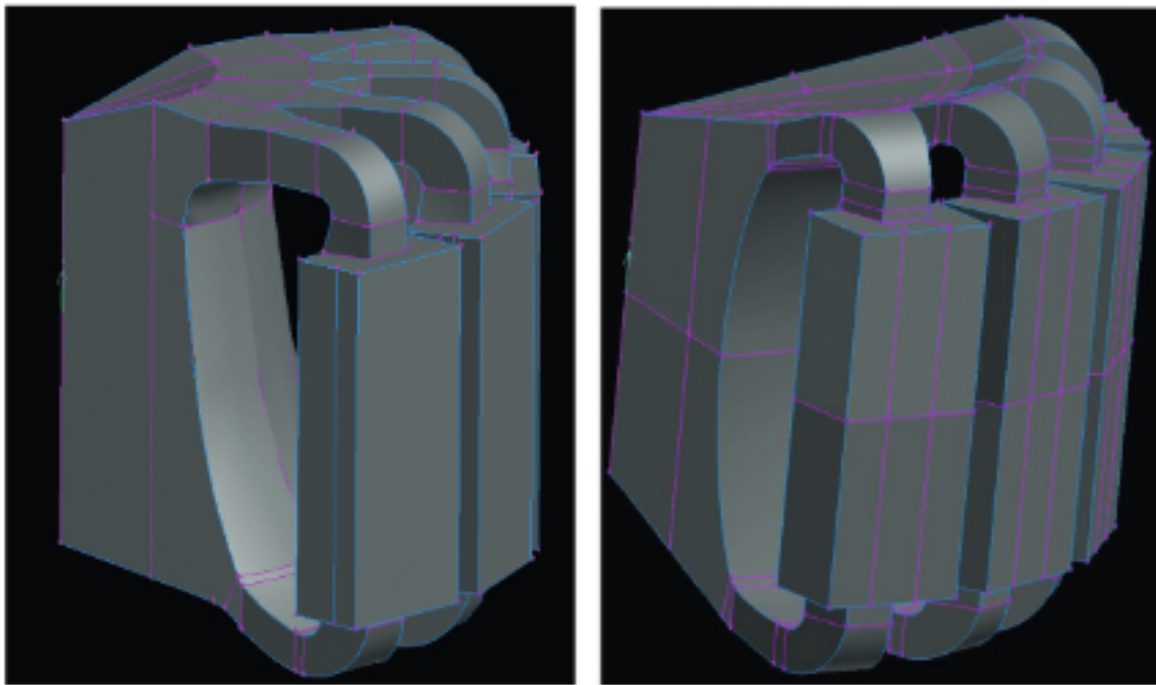

(a) Geometry I

(b) Geometry II

Fig. 2. MSFR core geometries used in the CFD thermal-hydraulics studies.

Figure 17: Geometries I and II, from [10]

In a separate report, [3], a reactor with the same nominal power, and actinide mol% is studied. While [10] is focused on the thermal-hydraulic facets of an MSFR, [3] provides more in-depth information about

the sort of fuel salt composition used in its reference model, and includes information on the reprocessing within the reference MSFR.

- This report gives the fissile salt explicitly: $LiF - ThF_4 - {}^{233}UF_4$ in with mol% concentrations of 77.5% – 20% – 2.5%
- The fertile blanket is 50 cm thick
- The initial blanket salt is identical to the above report - $LiF - ThF_4$ in mol% concentrations of 77.5% – 22.5%

Fuel-Moderator Ratio	100-0
Coolant	As fuel salt, without fuel isotopes.
Moderator	No moderator
Fuel Composition	8, 9

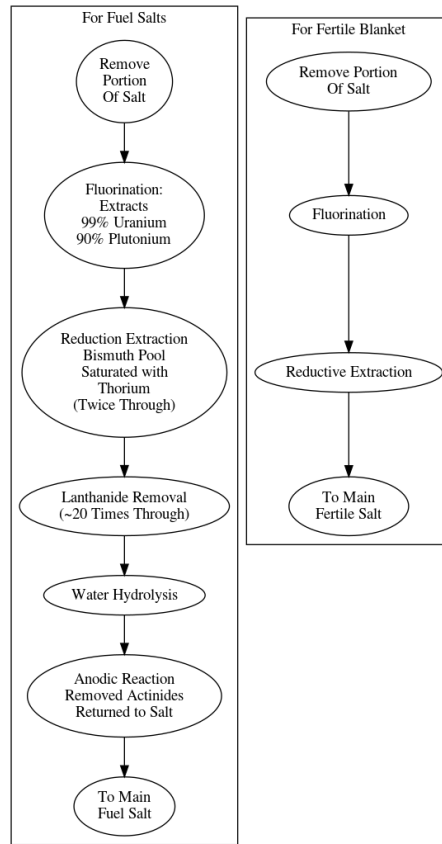


Figure 18: Fuel processing in the MSFR

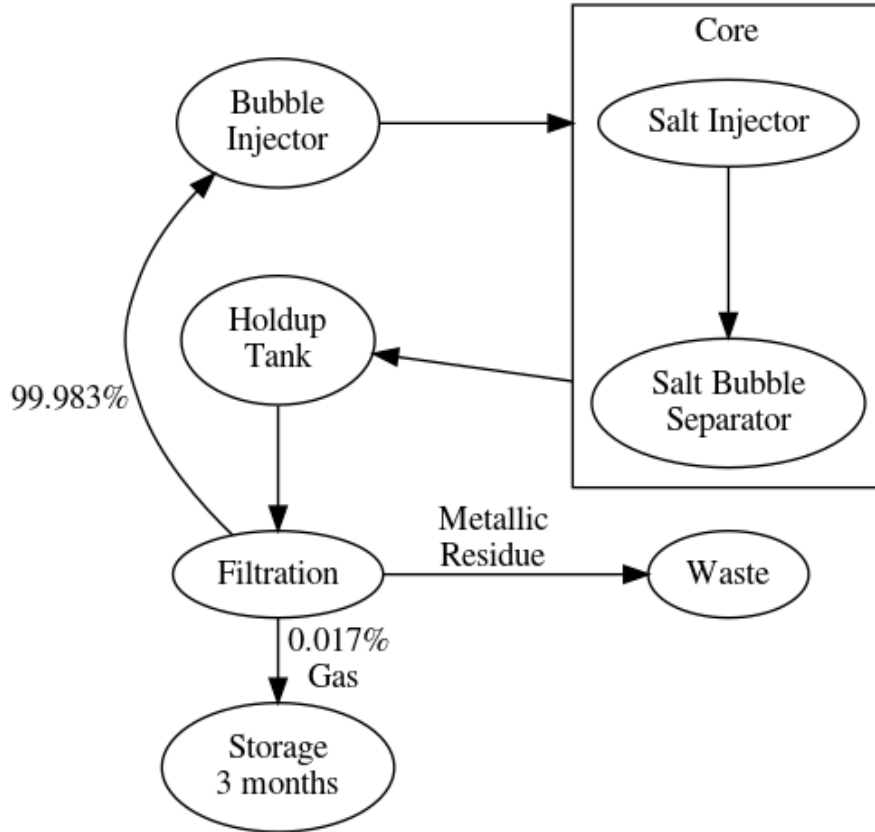


Figure 19: The off-gas system of the MSFR

8 Transatomic

The Transatomic reactor has two important differences from other thermal-spectrum MSRs in this review. It changes the fuel salt mixture, and forgoes a graphite moderator for something with a better lifespan under the conditions of the reactor [8].

MWth	1250
MWe	520
Spectrum	Thermal
Core Inlet Temperature	Not Given
Core Outlet Temperature	650 C
Pressure	"Near-Atmospheric"

- The fuel salt is a $LiF - UF_4$ mixture, with a uranium concentration of 27.5%
- Unlike the other MSR designs reviewed, the Transatomic reactor uses a zirconium hydride moderator with corrosion resistant cladding
 - Table 1 of [8] gives dimensional parameters for the moderator rods in the core
- Transatomic has proposed three fueling scenarios, but only the first has been the focus of ORNL studies:
 1. 5% start-up enrichment, followed by a 5% online feed
 2. 5% start-up enrichment, followed by an online feed of spent fuel from light water reactors
 3. 10% start-up enrichment, followed by an online feed of 19.9%

- Burnup can be as high as 200 MWd/MTU, with the intention of limiting waste products
 - After analysis of core models, with simulation of the chemical processing included with use of ChemTriton, the report concludes that after 15 years of operation, the reactor has bred enough plutonium to reach a burnup of 91.9 GWd/MTU by year 29.1 of operation

Fuel-Moderator Ratio	Not Given
Coolant	<i>FLiNaK</i>
Moderator	Zirconium Hydride
Fuel Composition	10

References

- [1] E. S. Bettis, L. G. Alexander, and H. L. Watts. DESIGN STUDIES OF A MOLTEN-SALT REACTOR DEMONSTRATION PLANT. Technical Report ORNL-TM-3832, 4668569, January 1972.
- [2] E. S. Bettis and Roy C. Robertson. The Design and Performance Features of a Single-Fluid Molten-Salt Breeder Reactor. *Nuclear Applications and Technology*, 8(2):190–207, February 1970.
- [3] X. Doligez, D. Heuer, E. Merle-Lucotte, M. Allibert, and V. Ghetta. Coupled study of the Molten Salt Fast Reactor core physics and its associated reprocessing unit. *Annals of Nuclear Energy*, 64(Supplement C):430–440, February 2014.
- [4] J.R. Engel, H.F. Bauman, J.F. Dearing, W.R. Grimes, H.E. McCoy, and W.A. Rhoades. Conceptual design characteristics of a denatured molten-salt reactor with once-through fueling. Department of Energy ORNL/TM-7207, 5352526, Oak Ridge National Laboratory, Oak Ridge, TN, United States, July 1980.
- [5] David LeBlanc and Cyril Rodenburg. 18 - Integral molten salt reactor. In Thomas J. Dolan, editor, *Molten Salt Reactors and Thorium Energy*, pages 541–556. Woodhead Publishing, 2017.
- [6] H. G. MacPherson. The Molten Salt Reactor Adventure. *Nuclear Science and Engineering*, 90(4):374–380, August 1985.
- [7] R. C. Robertson. MSRE DESIGN AND OPERATIONS REPORT. PART I. DESCRIPTION OF REACTOR DESIGN. Technical Report ORNL-TM-728, Oak Ridge National Lab., Tenn., January 1965.
- [8] Sean Robertson, Leslie Dewan, Mark Massie, Eva E. Davidson, Benjamin R. Betzler, Andrew Worrall, and Jeffrey J. Powers. Assessment of the Neutronic and Fuel Cycle Performance of the Transatomic Power Molten Salt Reactor Design. Technical Report ORNL/TM-2017/475, 1410921, September 2017.
- [9] M. W. Rosenthal, P. R. Kasten, and R. B. Briggs. Molten-Salt Reactors History, Status, and Potential. *Nuclear Applications and Technology*, 8(2):107–117, February 1970.
- [10] H. Rouch, O. Geoffroy, P. Rubiolo, A. Laureau, M. Brovchenko, D. Heuer, and E. Merle-Lucotte. Preliminary thermohydraulic core design of the Molten Salt Fast Reactor (MSFR). *Annals of Nuclear Energy*, 64:449–456, February 2014.