

# NetCDF Climate and Forecast (CF) Metadata Conventions

Brian Eaton, Jonathan Gregory, Bob Drach, Karl Taylor, Steve Hankin,  
Jon Blower, John Caron, Rich Signell, Phil Bentley, Greg Rappa, Heinke Höck,  
Alison Pamment, Martin Juckes, Martin Raspaud, Randy Horne,  
Timothy Whiteaker, David Blodgett, Charlie Zender, Daniel Lee

Version 1.9 (draft)

# Table of Contents

About the authors	9
Abstract	10
Preface	11
1. Introduction	12
1.1. Goals	12
1.2. Principles for design	12
1.3. Terminology	13
1.4. Overview	15
1.5. Relationship to the COARDS Conventions	17
2. NetCDF Files and Components	19
2.1. Filename	19
2.2. Data Types	19
2.3. Naming Conventions	20
2.4. Dimensions	20
2.5. Variables	21
2.5.1. Missing data, valid and actual range of data	21
2.6. Attributes	22
2.6.1. Identification of Conventions	22
2.6.2. Description of file contents	22
2.6.3. External Variables	23
2.7. Groups	23
2.7.1. Scope	23
2.7.2. Application of attributes	25
3. Description of the Data	26
3.1. Units	26
3.2. Long Name	27
3.3. Standard Name	27
3.4. Ancillary Data	29
3.5. Flags	30
4. Coordinate Types	34
4.1. Latitude Coordinate	34
4.2. Longitude Coordinate	35
4.3. Vertical (Height or Depth) Coordinate	36
4.3.1. Dimensional Vertical Coordinate	36
4.3.2. Dimensionless Vertical Coordinate	37
4.3.3. Parametric Vertical Coordinate	37
4.4. Time Coordinate	38
4.4.1. Calendar	39

4.5. Discrete Axis .....	42
5. Coordinate Systems and Domain .....	43
5.1. Independent Latitude, Longitude, Vertical, and Time Axes .....	44
5.2. Two-Dimensional Latitude, Longitude, Coordinate Variables .....	45
5.3. Reduced Horizontal Grid .....	46
5.4. Timeseries of Station Data .....	47
5.5. Trajectories .....	47
5.6. Horizontal Coordinate Reference Systems, Grid Mappings, and Projections .....	47
5.6.1. Use of the CRS Well-known Text Format .....	55
5.7. Scalar Coordinate Variables .....	60
5.8. Domain Variables .....	62
6. Labels and Alternative Coordinates .....	68
6.1. Labels .....	68
6.1.1. Geographic Regions .....	68
6.1.2. Taxon Names and Identifiers .....	69
6.2. Alternative Coordinates .....	70
7. Data Representative of Cells .....	72
7.1. Cell Boundaries .....	72
7.2. Cell Measures .....	76
7.3. Cell Methods .....	78
7.3.1. Statistics for more than one axis .....	80
7.3.2. Recording the spacing of the original data and other information .....	81
7.3.3. Statistics applying to portions of cells .....	82
7.3.4. Cell methods when there are no coordinates .....	84
7.4. Climatological Statistics .....	85
7.5. Geometries .....	91
8. Reduction of Dataset Size .....	98
8.1. Packed Data .....	98
8.2. Compression by Gathering .....	98
9. Discrete Sampling Geometries .....	101
9.1. Features and feature types .....	101
9.2. Collections, instances and elements .....	102
9.3. Representations of collections of features in data variables .....	103
9.3.1. Orthogonal multidimensional array representation .....	104
9.3.2. Incomplete multidimensional array representation .....	105
9.3.3. Contiguous ragged array representation .....	105
9.3.4. Indexed ragged array representation .....	106
9.4. The featureType attribute .....	107
9.5. Coordinates and metadata .....	107
9.6. Missing Data .....	108
10. Reporting Data Uncertainty .....	109

10.1. Uncertainty Variable .....	109
10.2. Uncertainty Classifications .....	109
10.3. Describing uncertainty method with cell_methods .....	111
10.4. Computed uncertainty .....	113
10.5. External file uncertainty .....	117
Appendix A: Attributes .....	119
Appendix B: Standard Name Table Format .....	124
Appendix C: Standard Name Modifiers .....	127
Appendix D: Parametric Vertical Coordinates .....	128
Atmosphere natural log pressure coordinate .....	128
Atmosphere sigma coordinate .....	129
Atmosphere hybrid sigma pressure coordinate .....	129
Atmosphere hybrid height coordinate .....	130
Atmosphere smooth level vertical (SLEVE) coordinate .....	130
Ocean sigma coordinate .....	131
Ocean s-coordinate .....	131
Ocean s-coordinate, generic form 1 .....	132
Ocean s-coordinate, generic form 2 .....	133
Ocean sigma over z coordinate .....	133
Ocean double sigma coordinate .....	134
Appendix E: Cell Methods .....	136
Appendix F: Grid Mappings .....	137
Albers Equal Area .....	137
Azimuthal equidistant .....	138
Geostationary projection .....	138
Lambert azimuthal equal area .....	139
Lambert conformal .....	140
Lambert Cylindrical Equal Area .....	140
Latitude-Longitude .....	141
Mercator .....	141
Oblique Mercator .....	142
Orthographic .....	142
Polar stereographic .....	143
Rotated pole .....	143
Sinusoidal .....	144
Stereographic .....	144
Transverse Mercator .....	144
Vertical perspective .....	145
Appendix G: Revision History .....	151
Appendix H: Annotated Examples of Discrete Geometries .....	152
H.1. Point Data .....	152

H.2. Time Series Data .....	153
H.2.1. Orthogonal multidimensional array representation of time series .....	154
H.2.2. Incomplete multidimensional array representation of time series .....	155
H.2.3. Single time series, including deviations from a nominal fixed spatial location. ....	157
H.2.4. Contiguous ragged array representation of time series .....	160
H.2.5. Indexed ragged array representation of time series .....	162
H.3. Profile Data .....	164
H.3.1. Orthogonal multidimensional array representation of profiles .....	164
H.3.2. Incomplete multidimensional array representation of profiles .....	167
H.3.3. Single profile .....	167
H.3.4. Contiguous ragged array representation of profiles .....	169
H.3.5. Indexed ragged array representation of profiles .....	172
H.4. Trajectory Data .....	174
H.4.1. Multidimensional array representation of trajectories .....	174
H.4.2. Single trajectory .....	176
H.4.3. Contiguous ragged array representation of trajectories .....	178
H.4.4. Indexed ragged array representation of trajectories .....	180
H.5. Time Series of Profiles .....	182
H.5.1. Multidimensional array representations of time series profiles .....	182
H.5.2. Time series of profiles at a single station .....	185
H.5.3. Ragged array representation of time series profiles .....	187
H.6. Trajectory of Profiles .....	189
H.6.1. Multidimensional array representation of trajectory profiles .....	190
H.6.2. Profiles along a single trajectory .....	193
H.6.3. Ragged array representation of trajectory profiles .....	196
Appendix I: The CF data model .....	199
Abstract .....	200
Introduction .....	201
Design criteria of the CF data model .....	201
The netCDF data model .....	201
Elements of CF-netCDF .....	202
The CF data model .....	204
Field construct .....	205
Domain construct .....	206
Domain axis construct and the data array .....	206
Coordinates: dimension coordinate and auxiliary constructs .....	207
Coordinate reference construct .....	209
Domain ancillary construct .....	211
Cell measure construct .....	212
Field ancillary constructs .....	212
Cell method construct .....	213

Revision History .....	214
Bibliography .....	221
References .....	221

## List of Tables

- 3.1. Supported Units
- 3.2. Flag Variable Bits (from Example)
- 3.3. Flag Variable Bit 2 and Bit 3 (from Example)
- A.1. Attributes
- C.1. Standard Name Modifiers
- D.1. Table D.1. Consistent sets of values for the `standard_names` of formula terms and the `computed_standard_name` needed in defining the ocean sigma coordinate, the ocean s-coordinate, the ocean\_sigma over z coordinate, and the ocean double sigma coordinate.
- E.1. Cell Methods
- F.1. Grid Mapping Attributes

## List of Examples

- 3.1. Use of `standard_name`
- 3.2. Ancillary instrument data
- 3.3. Ancillary quality flag data
- 3.4. A flag variable, using `flag_values`
- 3.5. A flag variable, using `flag_masks`
- 3.6. A region variable, using `flag_values`
- 3.7. A flag variable, using `flag_masks` and `flag_values`
- 4.1. Latitude axis
- 4.2. Longitude axis
- 4.3. Atmosphere sigma coordinate
- 4.4. Time axis
- 4.5. Perpetual time axis
- 4.6. Paleoclimate time axis
- 5.1. Independent coordinate variables
- 5.2. Two-dimensional coordinate variables
- 5.3. Reduced horizontal grid
- 5.6. Rotated pole grid
- 5.7. Example 5.7, "Lambert conformal projection"
- 5.8. Latitude and longitude on a spherical Earth
- 5.9. Latitude and longitude on the WGS 1984 datum
- 5.10. British National Grid
- 5.11. Latitude and longitude on the WGS 1984 datum + CRS WKT
- 5.12. British National Grid + Newlyn Datum in CRS WKT format
- 5.13. Example 5.13, "Multiple forecasts from a single analysis"
- 6.1. Northward heat transport in Atlantic Ocean
- 6.1.2. Taxon names and identifiers
- 6.2. Model level numbers
- 7.1. Specifying `formula_terms` when a parametric coordinate variable has bounds.
- 7.2. Cells on a latitude axis
- 7.3. Cells in a non-rectangular grid
- 7.4. Cell areas for a spherical geodesic grid
- 7.5. Methods applied to a timeseries
- 7.6. Surface air temperature variance

- 7.7. Mean surface temperature over land and sensible heat flux averaged separately over land and sea.
- 7.8. Thickness of sea-ice and snow on sea-ice averaged over sea area.
- 7.9. Climatological seasons
- 7.10. Decadal averages for January
- 7.11. Temperature for each hour of the average day
- 7.12. Extreme statistics and spell-lengths
- 7.13. Temperature for each hour of the typical climatological day
- 7.14. Monthly-maximum daily precipitation totals
- 7.15. Timeseries with geometry.
- 7.16. Polygons with holes
- 8.1. Horizontal compression of a three-dimensional array
- 8.2. Compression of a three-dimensional field
- 10.1. Minimum requirements for an uncertainty variable
- 10.2. Qualitative uncertainty using flag variable methods
- 10.3. Standard deviation multiplier in the cell\_methods
- 10.4. Confidence intervals
- 10.5. Non-symmetrical uncertainties
- 10.6. Computed uncertainty
- 10.7. External file uncertainty applying to time blocks
- B.1. A name table containing three entries
- H.1. Example H.1, "Point data"
- H.2. Timeseries with common element times in a time coordinate variable using the orthogonal multidimensional array representation.
- H.3. Timeseries of station data in the incomplete multidimensional array representation.
- H.4. A single timeseries.
- H.5. A single timeseries with time-varying deviations from a nominal point spatial location
- H.6. Timeseries of station data in the contiguous ragged array representation.
- H.7. Timeseries of station data in the indexed ragged array representation.
- H.8. Example H.8, "Atmospheric sounding profiles for a common set of vertical coordinates stored in the orthogonal multidimensional array representation."
- H.9. Data from a single atmospheric sounding profile.
- H.10. Atmospheric sounding profiles for a common set of vertical coordinates stored in the contiguous ragged array representation.
- H.11. Atmospheric sounding profiles for a common set of vertical coordinates stored in the indexed ragged array representation.
- H.12. Trajectories recording atmospheric composition in the incomplete multidimensional array representation.
- H.13. A single trajectory recording atmospheric composition.
- H.14. Trajectories recording atmospheric composition in the contiguous ragged array representation.
- H.15. Trajectories recording atmospheric composition in the indexed ragged array representation.
- H.16. Time series of atmospheric sounding profiles from a set of locations stored in a multidimensional array representation.
- H.17. Time series of atmospheric sounding profiles from a set of locations stored in an orthogonal multidimensional array representation.
- H.18. Time series of atmospheric sounding profiles from a single location stored in a multidimensional array representation.



- H.19. Time series of atmospheric sounding profiles from a set of locations stored in a ragged array representation.
- H.20. Time series of atmospheric sounding profiles along a set of trajectories stored in a multidimensional array representation.
- H.21. Time series of atmospheric sounding profiles along a trajectory stored in a multidimensional array representation.
- H.22. Time series of atmospheric sounding profiles along a set of trajectories stored in a ragged array representation.

# About the authors

## *Original Authors*

- Brian Eaton, NCAR
- Jonathan Gregory, University of Reading and UK Met Office Hadley Centre
- Bob Drach, PCMDI, LLNL
- Karl Taylor, PCMDI, LLNL
- Steve Hankin, PMEL, NOAA

## *Additional Authors*

- Jon Blower, University of Reading
- John Caron, UCAR
- Rich Signell, USGS
- Phil Bentley, UK Met Office Hadley Centre
- Greg Rappa, MIT
- Heinke Höck, DKRZ
- Alison Pamment, BADC
- Martin Juckes, BADC
- Martin Raspaud, SMHI
- Randy Horne, Excalibur Laboratories, Inc., Melbourne Beach Florida USA
- Timothy Whiteaker, University of Texas
- David Blodgett, USGS
- Charlie Zender, University of California, Irvine
- Daniel Lee, EUMETSAT
- David Hassell, NCAS and University of Reading
- Alan D. Snow, Corteva Agriscience
- Tobias Kölling, MPIM
- Kenneth Kehoe, University of Oklahoma

Many others have contributed to the development of CF through their participation in discussions about proposed changes.

# Abstract

This document describes the CF conventions for climate and forecast metadata designed to promote the processing and sharing of files created with the netCDF Application Programmer Interface [\[NetCDF\]](#). The conventions define metadata that provide a definitive description of what the data in each variable represents, and of the spatial and temporal properties of the data. This enables users of data from different sources to decide which quantities are comparable, and facilitates building applications with powerful extraction, regridding, and display capabilities.

The CF conventions generalize and extend the COARDS conventions [\[COARDS\]](#). The extensions include metadata that provides a precise definition of each variable via specification of a standard name, describes the vertical locations corresponding to dimensionless vertical coordinate values, and provides the spatial coordinates of non-rectilinear gridded data. Since climate and forecast data are often not simply representative of points in space/time, other extensions provide for the description of coordinate intervals, multidimensional cells and climatological time coordinates, and indicate how a data value is representative of an interval or cell. This standard also relaxes the COARDS constraints on dimension order and specifies methods for reducing the size of datasets.

# Preface

## Home page:

Contains links to: previous draft and current working draft documents; applications for processing CF conforming files; email list for discussion about interpretation, clarification, and proposals for changes or extensions to the current conventions. <http://cfconventions.org/>

## Revision history:

This document will be updated to reflect agreed changes to the standard and to correct mistakes according to the rules of [CF governance](#). See [Revision History](#) for the full revision history.

# Chapter 1. Introduction

## 1.1. Goals

The NetCDF library [\[NetCDF\]](#) is designed to read and write data that has been structured according to well-defined rules and is easily ported across various computer platforms. The netCDF interface enables but does not require the creation of *self-describing* datasets. The purpose of the CF conventions is to require conforming datasets to contain sufficient metadata that they are self-describing in the sense that each variable in the file has an associated description of what it represents, including physical units if appropriate, and that each value can be located in space (relative to earth-based coordinates) and time.

An important benefit of a convention is that it enables software tools to display data and perform operations on specified subsets of the data with minimal user intervention. It is possible to provide the metadata describing how a field is located in time and space in many different ways that a human would immediately recognize as equivalent. The purpose in restricting how the metadata is represented is to make it practical to write software that allows a machine to parse that metadata and to automatically associate each data value with its location in time and space. It is equally important that the metadata be easy for human users to write and to understand.

This standard is intended for use with climate and forecast data, for atmosphere, surface and ocean, and was designed with model-generated data particularly in mind. We recognise that there are limits to what a standard can practically cover; we restrict ourselves to issues that we believe to be of common and frequent concern in the design of climate and forecast metadata. Our main purpose therefore, is to propose a clear, adequate and flexible definition of the metadata needed for climate and forecast data. Although this is specifically a netCDF standard, we feel that most of the ideas are of wider application. The metadata objects could be contained in file formats other than netCDF. Conversion of the metadata between files of different formats will be facilitated if conventions for all formats are based on similar ideas.

This convention is designed to be backward compatible with the COARDS conventions [\[COARDS\]](#), by which we mean that a conforming COARDS dataset also conforms to the CF standard. Thus new applications that implement the CF conventions will be able to process COARDS datasets.

We have also striven to maximize conformance to the COARDS standard, that is, wherever the COARDS metadata conventions provide an adequate description we require their use. Extensions to COARDS are implemented in a manner such that the content that doesn't depend on the extensions is still accessible to applications that adhere to the COARDS standard.

## 1.2. Principles for design

The following principles are followed in the design of these conventions:

1. CF-netCDF metadata is designed to make datasets self-describing as far as practically possible. A self-describing dataset is one which can be interpreted without need for reference to resources outside itself, and the CF principle is to minimise that need. Therefore CF-netCDF does not use codes, but instead relies on controlled vocabularies containing terms that are chosen to be self-

explanatory (but more detailed definitions of them are provided in CF documents).

2. The conventions are changed only as actually required by common use-cases, and not for needs which cannot be anticipated with certainty.
3. In order to keep them logical, consistent in approach and as simple as possible, the netCDF conventions are devised with and within the conceptual framework of the CF data model, and new standard names are constructed as far as possible to follow the syntax and vocabulary of existing standard names.
4. The conventions should be practicable for both producers and users of data.
5. The metadata should be both easily readable by humans and easily parsable by programs.
6. To avoid potential inconsistency within the metadata, the conventions should minimise redundancy.
7. The conventions should minimise the possibility for mistakes by data-writers and data-readers.
8. Conventions are provided to allow data-producers to describe the data they wish to produce, rather than attempting to prescribe what data they should produce; consequently most CF conventions are optional.
9. Because many datasets remain in use for a long time after production, it is desirable that metadata written according to previous versions of the convention should also be compliant with and have the same interpretation under later versions.
10. Because all previous versions must generally continue to be supported in software for the sake of archived datasets, and in order to limit the complexity of the conventions, there is a strong preference against introducing any new capability to the conventions when there is already some method that can adequately serve the same purpose (even if a different method would arguably be better than the existing one).

## 1.3. Terminology

The terms in this document that refer to components of a netCDF file are defined in the NetCDF User's Guide (NUG) [\[NUG\]](#) NUG. Some of those definitions are repeated below for convenience.

### **ancestor group**

A group from which the referring group is descended via direct parent-child relationships

### **auxiliary coordinate variable**

Any netCDF variable that contains coordinate data, but is not a coordinate variable (in the sense of that term defined by the NUG and used by this standard - see below). Unlike coordinate variables, there is no relationship between the name of an auxiliary coordinate variable and the name(s) of its dimension(s).

### **boundary variable**

A boundary variable is associated with a variable that contains coordinate data. When a data value provides information about conditions in a cell occupying a region of space/time or some other dimension, the boundary variable provides a description of cell extent.

## **CDL syntax**

The ascii format used to describe the contents of a netCDF file is called CDL (network Common Data form Language). This format represents arrays using the indexing conventions of the C programming language, i.e., index values start at 0, and in multidimensional arrays, when indexing over the elements of the array, it is the last declared dimension that is the fastest varying in terms of file storage order. The netCDF utilities `ncdump` and `ncgen` use this format (see [NUG section on CDL syntax](#)). All examples in this document use CDL syntax.

## **cell**

A region in one or more dimensions whose boundary can be described by a set of vertices. The term *interval* is sometimes used for one-dimensional cells.

## **coordinate variable**

We use this term precisely as it is defined in the [NUG section on coordinate variables](#). It is a one-dimensional variable with the same name as its dimension [e.g., `time(time)` ], and it is defined as a numeric data type with values that are ordered monotonically. Missing values are not allowed in coordinate variables.

## **grid mapping variable**

A variable used as a container for attributes that define a specific grid mapping. The type of the variable is arbitrary since it contains no data.

## **latitude dimension**

A dimension of a netCDF variable that has an associated latitude coordinate variable.

## **local apex group**

The nearest (to a referring group) ancestor group in which a dimension of an out-of-group coordinate is defined. The word "apex" refers to position of this group at the vertex of the tree of groups formed by it, the referring group, and the group where a coordinate is located.

## **longitude dimension**

A dimension of a netCDF variable that has an associated longitude coordinate variable.

## **multidimensional coordinate variable**

An auxiliary coordinate variable that is multidimensional.

## **nearest item**

The item (variable or group) that can be reached via the shortest traversal of the file from the referring group following the rules set forth in the [Section 2.7, "Groups"](#).

## **out-of-group reference**

A reference to a variable or dimension that is not contained in the referring group.

## **path**

Paths must follow the UNIX style path convention and may begin with either a '/', '..', or a word.

## **recommendation**

Recommendations in this convention are meant to provide advice that may be helpful for

reducing common mistakes. In some cases we have recommended rather than required particular attributes in order to maintain backwards compatibility with COARDS. An application must not depend on a dataset's adherence to recommendations.

### **referring group**

The group in which a reference to a variable or dimension occurs.

### **scalar coordinate variable**

A scalar variable (i.e. one with no dimensions) that contains coordinate data. Depending on context, it may be functionally equivalent either to a size-one coordinate variable ([Section 5.7, "Scalar Coordinate Variables"](#)) or to a size-one auxiliary coordinate variable ([Section 6.1, "Labels"](#) and [Section 9.2, "Collections, instances, and elements"](#)).

### **sibling group**

Any group with the same parent group as the referring group

### **spatiotemporal dimension**

A dimension of a netCDF variable that is used to identify a location in time and/or space.

### **time dimension**

A dimension of a netCDF variable that has an associated time coordinate variable.

### **vertical dimension**

A dimension of a netCDF variable that has an associated vertical coordinate variable.

## **1.4. Overview**

No variable or dimension names are standardized by this convention. Instead we follow the lead of the NUG and standardize only the names of attributes and some of the values taken by those attributes. Variable or dimension names can either be a single variable name or a path to a variable. The overview provided in this section will be followed with more complete descriptions in following sections. [Appendix A, Attributes](#) contains a summary of all the attributes used in this convention.

Files using this version of the CF Conventions must set the NUG defined attribute **Conventions** to contain the string value **"CF-1.8"** to identify datasets that conform to these conventions.

The general description of a file's contents should be contained in the following attributes: **title**, **history**, **institution**, **source**, **comment** and **references** ([Section 2.6.2, "Description of file contents"](#)). For backwards compatibility with COARDS none of these attributes is required, but their use is recommended to provide human readable documentation of the file contents.

Each variable in a netCDF file has an associated description which is provided by the attributes **units**, **long\_name**, and **standard\_name**. The **units**, and **long\_name** attributes are defined in the NUG and the **standard\_name** attribute is defined in this document.

The **units** attribute is required for all variables that represent dimensional quantities (except for boundary variables defined in [Section 7.1, "Cell Boundaries"](#)). The values of the **units** attributes are character strings that are recognized by UNIDATA's Udunits package [[UDUNITS](#)], (with exceptions



allowed as discussed in [Section 3.1, "Units"](#) ).

The **long\_name** and **standard\_name** attributes are used to describe the content of each variable. For backwards compatibility with COARDS neither is required, but use of at least one of them is strongly recommended. The use of standard names will facilitate the exchange of climate and forecast data by providing unambiguous identification of variables most commonly analyzed.

Four types of coordinates receive special treatment by these conventions: latitude, longitude, vertical, and time. Every variable must have associated metadata that allows identification of each such coordinate that is relevant. Two independent parts of the convention allow this to be done. There are conventions that identify the variables that contain the coordinate data, and there are conventions that identify the type of coordinate represented by that data.

There are two methods used to identify variables that contain coordinate data. The first is to use the NUG-defined "coordinate variables." *The use of coordinate variables is required for all dimensions that correspond to one dimensional space or time coordinates* . In cases where coordinate variables are not applicable, the variables containing coordinate data are identified by the **coordinates** attribute.

Once the variables containing coordinate data are identified, further conventions are required to determine the type of coordinate represented by each of these variables. Latitude, longitude, and time coordinates are identified solely by the value of their **units** attribute. Vertical coordinates with units of pressure may also be identified by the **units** attribute. Other vertical coordinates must use the attribute **positive** which determines whether the direction of increasing coordinate value is up or down. Because identification of a coordinate type by its units involves the use of an external software package [\[UDUNITS\]](#) , we provide the optional attribute **axis** for a direct identification of coordinates that correspond to latitude, longitude, vertical, or time axes.

Latitude, longitude, and time are defined by internationally recognized standards, and hence, identifying the coordinates of these types is sufficient to locate data values uniquely with respect to time and a point on the earth's surface. On the other hand identifying the vertical coordinate is not necessarily sufficient to locate a data value vertically with respect to the earth's surface. In particular a model may output data on the dimensionless vertical coordinate used in its mathematical formulation. To achieve the goal of being able to spatially locate all data values, this convention includes the definitions of common dimensionless vertical coordinates in [Appendix D, Parametric Vertical Coordinates](#) . These definitions provide a mapping between the dimensionless coordinate values and dimensional values that can be uniquely located with respect to a point on the earth's surface. The definitions are associated with a coordinate variable via the **standard\_name** and **formula\_terms** attributes. For backwards compatibility with COARDS use of these attributes is not required, but is strongly recommended.

It is often the case that data values are not representative of single points in time and/or space, but rather of intervals or multidimensional cells. This convention defines a **bounds** attribute to specify the extent of intervals or cells. When data that is representative of cells can be described by simple statistical methods, those methods can be indicated using the **cell\_methods** attribute. An important application of this attribute is to describe climatological and diurnal statistics.

Methods for reducing the total volume of data include both packing and compression. Packing reduces the data volume by reducing the precision of the stored numbers. It is implemented using

the attributes `add_offset` and `scale_factor` which are defined in the NUG. Compression on the other hand loses no precision, but reduces the volume by not storing missing data. The attribute `compress` is defined for this purpose.

## 1.5. Relationship to the COARDS Conventions

These conventions generalize and extend the COARDS conventions [\[COARDS\]](#) . A major design goal has been to maintain *backward compatibility* with COARDS. Hence applications written to process datasets that conform to these conventions will also be able to process COARDS conforming datasets. We have also striven to maximize *conformance* to the COARDS standard so that datasets that only require the metadata that was available under COARDS will still be able to be processed by COARDS conforming applications. But because of the extensions that provide new metadata content, and the relaxation of some COARDS requirements, datasets that conform to these conventions will not necessarily be recognized by applications that adhere to the COARDS conventions. The features of these conventions that allow writing netCDF files that are not COARDS conforming are summarized below.

COARDS standardizes the description of grids composed of independent latitude, longitude, vertical, and time axes. In addition to standardizing the metadata required to identify each of these axis types COARDS restricts the axis (equivalently dimension) ordering to be longitude, latitude, vertical, and time (with longitude being the most rapidly varying dimension). Because of I/O performance considerations it may not be possible for models to output their data in conformance with the COARDS requirement. The CF convention places no rigid restrictions on the order of dimensions, however we encourage data producers to make the extra effort to stay within the COARDS standard order. The use of non-COARDS axis ordering will render files inaccessible to some applications and limit interoperability. Often a buffering operation can be used to minimize performance penalties when axis ordering in model code does not match the axis ordering of a COARDS file.

COARDS addresses the issue of identifying dimensionless vertical coordinates, but does not provide any mechanism for mapping the dimensionless values to dimensional ones that can be located with respect to the earth's surface. For backwards compatibility we continue to allow (but do not require) the `units` attribute of dimensionless vertical coordinates to take the values "level", "layer", or "sigma\_level." But we recommend that the `standard_name` and `formula_terms` attributes be used to identify the appropriate definition of the dimensionless vertical coordinate (see [Section 4.3.2, "Dimensionless Vertical Coordinate"](#) ).

The CF conventions define attributes which enable the description of data properties that are outside the scope of the COARDS conventions. These new attributes do not violate the COARDS conventions, but applications that only recognize COARDS conforming datasets will not have the capabilities that the new attributes are meant to enable. Briefly the new attributes allow:

- Identification of quantities using standard names.
- Description of dimensionless vertical coordinates.
- Associating dimensions with auxiliary coordinate variables.
- Linking data variables to scalar coordinate variables.
- Associating dimensions with labels.

- Description of intervals and cells.
- Description of properties of data defined on intervals and cells.
- Description of climatological statistics.
- Data compression for variables with missing values.

# Chapter 2. NetCDF Files and Components

The components of a netCDF file are described in section 2 of the NUG [NUG] . In this section we describe conventions associated with filenames and the basic components of a netCDF file. We also introduce new attributes for describing the contents of a file.

## 2.1. Filename

NetCDF files should have the file name extension ".nc".

## 2.2. Data Types

Data variables must be one of the following data types: **string**, **char**, **byte**, **unsigned byte**, **short**, **unsigned short**, **int**, **unsigned int**, **int64**, **unsigned int64**, **float** or **real**, and **double** (which are all the [netCDF external data types]([https://www.unidata.ucar.edu/software/netcdf/docs/data\\_type.html#external\\_types](https://www.unidata.ucar.edu/software/netcdf/docs/data_type.html#external_types)) supported by netCDF-4). The **string** type is only available in files using the netCDF version 4 (netCDF-4) format. The **char** and **string** types are not intended for numeric data. One byte numeric data should be stored using the **byte** or **unsigned byte** data types. It is possible to treat the **byte** and **short** types as unsigned by using the NUG convention of indicating the unsigned range using the **valid\_min**, **valid\_max**, or **valid\_range** attributes. In many situations, any integer type may be used. When the phrase "integer type" is used in this document, it should be understood to mean **byte**, **unsigned byte**, **short**, **unsigned short**, **int**, **unsigned int**, **int64**, or **unsigned int64**.

Strings in variables may be represented one of two ways - as atomic strings or as character arrays. An n-dimensional array of strings may be implemented as a variable of type **string** with n dimensions, or as a variable of type **char** with n+1 dimensions where the last (most rapidly varying) dimension is large enough to contain the longest string in the variable. For example, a character array variable of strings containing the names of the months would be dimensioned (12,9) in order to accommodate "September", the month with the longest name. The other strings, such as "May", should be padded with trailing NULL or space characters so that every array element is filled. If the atomic string option is chosen, each element of the variable can be assigned a string with a different length. The CDL example below shows one variable of each type.

*Example 1.1. String Variable Representations*

```
dimensions:
  strings = 30 ;
  strlen = 10 ;
variables:
  char char_variable(strings,strlen) ;
    char_variable:long_name = "strings of type char" ;
  string str_variable(strings) ;
    str_variable:long_name = "strings of type string" ;
```

The examples in this document that use string-valued variables alternate between these two forms.

## 2.3. Naming Conventions

Variable, dimension, attribute and group names should begin with a letter and be composed of letters, digits, and underscores. Note that this is in conformance with the COARDS conventions, but is more restrictive than the netCDF interface which allows use of the hyphen character. The netCDF interface also allows leading underscores in names, but the NUG states that this is reserved for system use.

Case is significant in netCDF names, but it is recommended that names should not be distinguished purely by case, i.e., if case is disregarded, no two names should be the same. It is also recommended that names should be obviously meaningful, if possible, as this renders the file more effectively self-describing.

This convention does not standardize any variable or dimension names. Attribute names and their contents, where standardized, are given in English in this document and should appear in English in conforming netCDF files for the sake of portability. Languages other than English are permitted for variables, dimensions, and non-standardized attributes. The content of some standardized attributes are string values that are not standardized, and thus are not required to be in English. For example, a description of what a variable represents may be given in a non-English language using the `long_name` attribute (see [Section 3.2, "Long Name"](#)) whose contents are not standardized, but a description given by the `standard_name` attribute (see [Section 3.3, "Standard Name"](#)) must be taken from the standard name table which is in English.

## 2.4. Dimensions

A variable may have any number of dimensions, including zero, and the dimensions must all have different names. *COARDS strongly recommends limiting the number of dimensions to four, but we wish to allow greater flexibility*. The dimensions of the variable define the axes of the quantity it contains. Dimensions other than those of space and time may be included. Several examples can be found in this document. Under certain circumstances, one may need more than one dimension in a particular quantity. For instance, a variable containing a two-dimensional probability density function might correlate the temperature at two different vertical levels, and hence would have temperature on both axes.

If any or all of the dimensions of a variable have the interpretations of "date or time" (**T**), "height or depth" (**Z**), "latitude" (**Y**), or "longitude" (**X**) then we recommend, but do not require (see [Section 1.5, "Relationship to the COARDS Conventions"](#)), those dimensions to appear in the relative order **T**, then **Z**, then **Y**, then **X** in the CDL definition corresponding to the file. All other dimensions should, whenever possible, be placed to the left of the spatiotemporal dimensions.

Dimensions may be of any size, including unity. When a single value of some coordinate applies to all the values in a variable, the recommended means of attaching this information to the variable is by use of a dimension of size unity with a one-element coordinate variable. It is also acceptable to use a scalar coordinate variable which eliminates the need for an associated size one dimension in the data variable. The advantage of using either a coordinate variable or an auxiliary coordinate variable is that all its attributes can be used to describe the single-valued quantity, including boundaries. For example, a variable containing data for temperature at 1.5 m above the ground has a single-valued coordinate supplying a height of 1.5 m, and a time-mean quantity has a single-

valued time coordinate with an associated boundary variable to record the start and end of the averaging period.

## 2.5. Variables

This convention does not standardize variable names.

NetCDF variables that contain coordinate data are referred to as *coordinate variables*, *auxiliary coordinate variables*, *scalar coordinate variables*, or *multidimensional coordinate variables*.

### 2.5.1. Missing data, valid and actual range of data

The NUG conventions ([NUG Appendix A, Attribute Conventions](#)) provide the `_FillValue`, `missing_value`, `valid_min`, `valid_max`, and `valid_range` attributes to indicate missing data. Missing data is allowed in data variables and auxiliary coordinate variables. Generic applications should treat the data as missing where any auxiliary coordinate variables have missing values; special-purpose applications might be able to make use of the data. Missing data is not allowed in coordinate variables.

The NUG conventions for missing data changed significantly between version 2.3 and version 2.4. Since version 2.4 the NUG defines missing data as all values outside of the `valid_range`, and specifies how the `valid_range` should be defined from the `_FillValue` (which has library specified default values) if it hasn't been explicitly specified. If only one missing value is needed for a variable then we recommend that this value be specified using the `_FillValue` attribute. Doing this guarantees that the missing value will be recognized by generic applications that follow either the before or after version 2.4 conventions.

The scalar attribute with the name `_FillValue` and of the same type as its variable is recognized by the netCDF library as the value used to pre-fill disk space allocated to the variable. This value is considered to be a special value that indicates undefined or missing data, and is returned when reading values that were not written. The `_FillValue` should be outside the range specified by `valid_range` (if used) for a variable. The netCDF library defines a default fill value for each data type (See the "Note on fill values" in [NUG Appendix B, File Format Specifications](#)).

The missing values of a variable with `scale_factor` and/or `add_offset` attributes (see [Section 8.1, "Packed Data"](#)) are interpreted relative to the variable's external values (a.k.a. the packed values, the raw values, the values stored in the netCDF file), not the values that result after the scale and offset are applied. Applications that process variables that have attributes to indicate both a transformation (via a scale and/or offset) and missing values should first check that a data value is valid, and then apply the transformation. Note that values that are identified as missing should not be transformed. Since the missing value is outside the valid range it is possible that applying a transformation to it could result in an invalid operation. For example, the default `_FillValue` is very close to the maximum representable value of IEEE single precision floats, and multiplying it by 100 produces an "Infinity" (using single precision arithmetic).

This convention defines a two-element vector attribute `actual_range` for variables containing numeric data. If the variable is packed using the `scale_factor` and `add_offset` attributes (see [Section 8.1, "Packed Data"](#)), the elements of the `actual_range` should have the type intended for the unpacked data. The elements of `actual_range` must be exactly equal to the minimum and the



maximum data values which occur in the variable (when unpacked if packing is used), and both must be within the `valid_range` if specified. If the data is all missing or invalid, the `actual_range` attribute cannot be used.

## 2.6. Attributes

This standard describes many attributes (some mandatory, others optional), but a file may also contain non-standard attributes. Such attributes do not represent a violation of this standard. Application programs should ignore attributes that they do not recognise or which are irrelevant for their purposes. Conventional attribute names should be used wherever applicable. Non-standard names should be as meaningful as possible. Before introducing an attribute, consideration should be given to whether the information would be better represented as a variable. In general, if a proposed attribute requires ancillary data to describe it, is multidimensional, requires any of the defined netCDF dimensions to index its values, or requires a significant amount of storage, a variable should be used instead. When this standard defines string attributes that may take various prescribed values, the possible values are generally given in lower case. However, applications programs should not be sensitive to case in these attributes. Several string attributes are defined by this standard to contain "blank-separated lists". Consecutive words in such a list are separated by one or more adjacent spaces. The list may begin and end with any number of spaces. See [Appendix A, Attributes](#) for a list of attributes described by this standard.

### 2.6.1. Identification of Conventions

Files that follow this version of the CF Conventions must indicate this by setting the NUG defined global attribute `Conventions` to a string value that contains "`CF-1.8`". The Conventions version number contained in that string can be used to find the web based versions of this document are from the [netCDF Conventions web page](#). Subsequent versions of the CF Conventions will not make invalid a compliant usage of this or earlier versions of the CF terms and forms.

It is possible for a netCDF file to adhere to more than one set of conventions, even when there is no inheritance relationship among the conventions. In this case, the value of the Conventions attribute may be a single text string containing a list of the convention names separated by blank space (recommended) or commas (if a convention name contains blanks). This is the Unidata recommended syntax from NetCDF Users Guide, Appendix A. If the string contains any commas, it is assumed to be a comma-separated list.

When CF is listed with other conventions, this asserts the same full compliance with CF requirements and interpretations as if CF was the sole convention. It is the responsibility of the data-writer to ensure that all common metadata is used with consistent meaning between conventions.

### 2.6.2. Description of file contents

The following attributes are intended to provide information about where the data came from and what has been done to it. This information is mainly for the benefit of human readers. The attribute values are all character strings. For readability in ncdump outputs it is recommended to embed newline characters into long strings to break them into lines. For backwards compatibility with COARDS none of these global attributes is required.

The NUG defines **title** and **history** to be global attributes. We wish to allow the newly defined attributes, i.e., **institution**, **source**, **references**, and **comment**, to be either global or assigned to individual variables. When an attribute appears both globally and as a variable attribute, the variable's version has precedence.

#### **title**

A succinct description of what is in the dataset.

#### **institution**

Specifies where the original data was produced.

#### **source**

The method of production of the original data. If it was model-generated, **source** should name the model and its version, as specifically as could be useful. If it is observational, **source** should characterize it (e.g., "**surface observation**" or "**radiosonde**").

#### **history**

Provides an audit trail for modifications to the original data. Well-behaved generic netCDF filters will automatically append their name and the parameters with which they were invoked to the global history attribute of an input netCDF file. We recommend that each line begin with a timestamp indicating the date and time of day that the program was executed.

#### **references**

Published or web-based references that describe the data or methods used to produce it.

#### **comment**

Miscellaneous information about the data or methods used to produce it.

### **2.6.3. External Variables**

The global **external\_variables** attribute is a blank-separated list of the names of variables which are named by attributes in the file but which are not present in the file. These variables are to be found in other files (called "external files") but CF does not provide conventions for identifying the files concerned. The only attribute for which CF standardises the use of external variables is **cell\_measures**.

## **2.7. Groups**

Groups provide a powerful mechanism to structure data hierarchically. This convention does not standardize group names. It may be of benefit to name groups in such a way that human readers can interpret them. However, files that conform to this standard shall not require software to interpret or decode information from group names. References to out-of-group variable and dimensions shall be found by applying the scoping rules outlined below.

### **2.7.1. Scope**

The scoping mechanism is in keeping with the following principal:



"Dimensions are scoped such that they are visible to all child groups. For example, you can define a dimension in the root group, and use its dimension id when defining a variable in a sub-group."

— [The NetCDF Data Model: Groups](#)

Any variable or dimension can be referred to, as long as it can be found with one of the following search strategies:

- Search by absolute path
- Search by relative path
- Search by proximity

These strategies are explained in detail in the following sections.

If any dimension of an out-of-group variable has the same name as a dimension of the referring variable, the two must be the same dimension (i.e. they must have the same netCDF dimension ID).

### Search by absolute path

A variable or dimension specified with an absolute path (i.e., with a leading slash "/") is at the indicated location relative to the root group, as in a UNIX-style file convention. For example, a `coordinates` attribute of `/g1/lat` refers to the `lat` variable in group `/g1`.

### Search by relative path

As in a UNIX-style file convention, a variable or dimension specified with a relative path (i.e., containing a slash but not with a leading slash, e.g. `child/lat`) is at the location obtained by affixing the relative path to the absolute path of the referring attribute. For example, a `coordinates` attribute of `g1/lat` refers to the `lat` variable in subgroup `g1` of the current (referring) group. Upward path traversals from the current group are indicated with the UNIX convention. For example, `../g1/lat` refers to the `lat` variable in the sibling group `g1` of the current (referring) group.

### Search by proximity

A variable or dimension specified with no path (for example, `lat`) refers to the variable or dimension of that name, if there is one, in the referring group. If not, the ancestors of the referring group are searched for it, starting from the direct ancestor and proceeding toward the root group, until it is found.

A special case exists for coordinate variables. Because coordinate variables must share dimensions with the variables that reference them, the ancestor search is executed only until the local apex group is reached. For coordinate variables that are not found in the referring group or its ancestors, a further strategy is provided, called lateral search. The lateral search proceeds downwards from the local apex group width-wise through each level of groups until the sought coordinate is found. The lateral search algorithm may only be used for NUG coordinate variables; it shall not be used for auxiliary coordinate variables.

**NOTE**

This use of the lateral search strategy to find them is discouraged. They are allowed mainly for backwards-compatibility with existing datasets, and may be deprecated in future versions of the standard.

## 2.7.2. Application of attributes

The following attributes are optional for non-root groups. They are allowed in order to provide additional provenance and description of the subsidiary data. They do not override attributes from parent groups.

- `title`
- `history`

If these attributes are present, they may be applied additively to the parent attributes of the same name. If a file containing groups is modified, the user or application need only update these attributes in the root group, rather than traversing all groups and updating all attributes that are found with the same name. In the case of conflicts, the root group attribute takes precedence over per-group instances of these attributes.

The following attributes may only be used in the root group and shall not be duplicated or overridden in child groups:

- `Conventions`
- `external_variables`

Furthermore, per-variable attributes must be attached to the variables to which they refer. They may not be attached to a group, even if all variables within that group use the same attribute and value.

If attributes are present within groups without being attached to a variable, these attributes apply to the group where they are defined, and to that group's descendants, but not to ancestor or sibling groups. If a group attribute is defined in a parent group, and one of the child group redefines the same attribute, the definition within the child group applies for the child and all of its descendants.

# Chapter 3. Description of the Data

The attributes described in this section are used to provide a description of the content and the units of measurement for each variable. We continue to support the use of the `units` and `long_name` attributes as defined in COARDS. We extend COARDS by adding the optional `standard_name` attribute which is used to provide unique identifiers for variables. This is important for data exchange since one cannot necessarily identify a particular variable based on the name assigned to it by the institution that provided the data.

The `standard_name` attribute can be used to identify variables that contain coordinate data. But since it is an optional attribute, applications that implement these standards must continue to be able to identify coordinate types based on the COARDS conventions.

## 3.1. Units

The `units` attribute is required for all variables that represent dimensional quantities (except for boundary variables defined in [Section 7.1, "Cell Boundaries"](#) and climatology variables defined in [Section 7.4, "Climatological Statistics"](#) ). The value of the `units` attribute is a string that can be recognized by UNIDATA's Udunits package [[UDUNITS](#)], with a few exceptions that are given below. The [Udunits package](#) includes a file `udunits.dat`, which lists its supported unit names. Note that case is significant in the `units` strings.

The COARDS convention prohibits the unit `degrees` altogether, but this unit is not forbidden by the CF convention because it may in fact be appropriate for a variable containing, say, solar zenith angle. The unit `degrees` is also allowed on coordinate variables such as the latitude and longitude coordinates of a transformed grid. In this case the coordinate values are not true latitudes and longitudes which must always be identified using the more specific forms of `degrees` as described in [Section 4.1, "Latitude Coordinate"](#) and [Section 4.2, "Longitude Coordinate"](#).

Units are not required for dimensionless quantities. A variable with no units attribute is assumed to be dimensionless. However, a units attribute specifying a dimensionless unit may optionally be included. The Udunits package defines a few dimensionless units, such as `percent`, but is lacking commonly used units such as ppm (parts per million). This convention does not support the addition of new dimensionless units that are not udunits compatible. The conforming unit for quantities that represent fractions, or parts of a whole, is "1". The conforming unit for parts per million is "1e-6". Descriptive information about dimensionless quantities, such as sea-ice concentration, cloud fraction, probability, etc., should be given in the `long_name` or `standard_name` attributes (see below) rather than the `units` .

The units `level`, `layer`, and `sigma_level` are allowed for dimensionless vertical coordinates to maintain backwards compatibility with COARDS. These units are not compatible with Udunits and are deprecated by this standard because conventions for more precisely identifying dimensionless vertical coordinates are introduced (see [Section 4.3.2, "Dimensionless Vertical Coordinate"](#)).

The Udunits syntax that allows scale factors and offsets to be applied to a unit is not supported by this standard. The application of any scale factors or offsets to data should be indicated by the `scale_factor` and `add_offset` attributes. Use of these attributes for data packing, which is their most important application, is discussed in detail in [Section 8.1, "Packed Data"](#).

Udunits recognizes the following prefixes and their abbreviations.

Table 3.1. Supported Units

Factor	Prefix	Abbreviation		Factor	Prefix	Abbreviation
1e1	deca,deka	da		1e-1	deci	d
1e2	hecto	h		1e-2	centi	c
1e3	kilo	k		1e-3	milli	m
1e6	mega	M		1e-6	micro	u
1e9	giga	G		1e-9	nano	n
1e12	tera	T		1e-12	pico	p
1e15	peta	P		1e-15	femto	f
1e18	exa	E		1e-18	atto	a
1e21	zetta	Z		1e-21	zepto	z
1e24	yotta	Y		1e-24	yocto	y

## 3.2. Long Name

The **long\_name** attribute is defined by the NUG to contain a long descriptive name which may, for example, be used for labeling plots. For backwards compatibility with COARDS this attribute is optional. But it is highly recommended that either this or the **standard\_name** attribute defined in the next section be provided to make the file self-describing. If a variable has no **long\_name** attribute then an application may use, as a default, the **standard\_name** if it exists, or the variable name itself.

## 3.3. Standard Name

A fundamental requirement for exchange of scientific data is the ability to describe precisely the physical quantities being represented. To some extent this is the role of the **long\_name** attribute as defined in the NUG. However, usage of **long\_name** is completely ad-hoc. For some applications it would be desirable to have a more definitive description of the quantity, which would allow users of data from different sources (some of which might be models and others observational) to determine whether quantities were in fact comparable. For this reason an optional mechanism for uniquely associating each variable with a standard name is provided.

A standard name is associated with a variable via the attribute **standard\_name** which takes a string value comprised of a standard name optionally followed by one or more blanks and a standard name modifier (a string value from [Appendix C, Standard Name Modifiers](#)).

The set of permissible standard names is contained in the standard name table. The table entry for each standard name contains the following:

### **standard name**

The name used to identify the physical quantity. A standard name contains no whitespace and is

case sensitive.

### canonical units

Representative units of the physical quantity. Unless it is dimensionless, a variable with a **standard\_name** attribute must have units which are physically equivalent (not necessarily identical) to the canonical units, possibly modified by an operation specified by the standard name modifier (see below and [Appendix C, Standard Name Modifiers](#)) or by the **cell\_methods** attribute (see [Section 7.3, "Cell Methods"](#) and [Appendix E, Cell Methods](#)) or both.

### description

The description is meant to clarify the qualifiers of the fundamental quantities such as which surface a quantity is defined on or what the flux sign conventions are. We don't attempt to provide precise definitions of fundamental physical quantities (e.g., temperature) which may be found in the literature. The description may define rules on the variable type, attributes and coordinates which must be complied with by any variable carrying that standard name (such as in example 3.4).

When appropriate, the table entry also contains the corresponding GRIB parameter code(s) (from ECMWF and NCEP) and AMIP identifiers.

The standard name table is located at <http://cfconventions.org/Data/cf-standard-names/current/src/cf-standard-name-table.xml>, written in compliance with the XML format, as described in [Appendix B, Standard Name Table Format](#). Knowledge of the XML format is only necessary for application writers who plan to directly access the table. A formatted text version of the table is provided at <http://cfconventions.org/Data/cf-standard-names/current/build/cf-standard-name-table.html>, and this table may be consulted in order to find the standard name that should be assigned to a variable. Some standard names (e.g. **region** and **area\_type**) are used to indicate quantities which are permitted to take only certain standard values. This is indicated in the definition of the quantity in the standard name table, accompanied by a list or a link to a list of the permitted values.

Standard names by themselves are not always sufficient to describe a quantity. For example, a variable may contain data to which spatial or temporal operations have been applied. Or the data may represent an uncertainty in the measurement of a quantity. These quantity attributes are expressed as modifiers of the standard name. Modifications due to common statistical operations are expressed via the **cell\_methods** attribute (see [Section 7.3, "Cell Methods"](#) and [Appendix E, Cell Methods](#)). Other types of quantity modifiers are expressed using the optional modifier part of the **standard\_name** attribute. The permissible values of these modifiers are given in [Appendix C, Standard Name Modifiers](#).

*Example 3.1. Use of `standard_name`*

```
float psl(lat,lon) ;
  psl:long_name = "mean sea level pressure" ;
  psl:units = "hPa" ;
  psl:standard_name = "air_pressure_at_sea_level" ;
```

The description in the standard name table entry for `air_pressure_at_sea_level` clarifies that "sea level" refers to the mean sea level, which is close to the geoid in sea areas.

Here are lists of equivalences between the CF standard names and the standard names from the [ECMWF GRIB tables](#), the [NCEP GRIB tables](#), and the [PCMDI tables](#).

## 3.4. Ancillary Data

When one data variable provides metadata about the individual values of another data variable it may be desirable to express this association by providing a link between the variables. For example, instrument data may have associated measures of uncertainty. The attribute `ancillary_variables` is used to express these types of relationships. It is a string attribute whose value is a blank separated list of variable names. The nature of the relationship between variables associated via `ancillary_variables` must be determined by other attributes. The variables listed by the `ancillary_variables` attribute will often have the standard name of the variable which points to them including a modifier ([Appendix C, Standard Name Modifiers](#)) to indicate the relationship.

*Example 3.2. Ancillary instrument data*

```
float q(time) ;
  q:standard_name = "specific_humidity" ;
  q:units = "g/g" ;
  q:ancillary_variables = "q_error_limit q_detection_limit" ;
float q_error_limit(time)
  q_error_limit:standard_name = "specific_humidity_standard_error" ;
  q_error_limit:units = "g/g" ;
float q_detection_limit(time)
  q_detection_limit:standard_name = "specific_humidity_detection_minimum" ;
  q_detection_limit:units = "g/g" ;
```

Alternatively, `ancillary_variables` may be used as status flags indicating the operational status of an instrument producing the data or as quality flags indicating the results of a quality control test, or some other quantitative quality assessment, performed against the measurements contained in the source variable. In these cases, the flag variable will include a standard name that differs from that of the source variable and indicates the specific type of flag the variable represents.

The standard names table includes many names intended to be used in this situation, both general names meant to be used to flexibly represent any type of status or quality assessment, as well as

names for specific quality control tests commonly applied to geophysical phenomena timeseries data. Several examples are listed below:

*Sample flag variable standard names:*

- **status\_flag** and **quality\_flag**: general flag categories for instrument status or quality assessment
- **climatology\_test\_quality\_flag**, **flat\_line\_test\_quality\_flag**, **gap\_test\_quality\_flag**, **spike\_test\_quality\_flag**: a subset of standard name flags used to indicate the results of commonly-used geophysical timeseries data quality control tests (consult the standard names table for a full list of published flags)
- **aggregate\_quality\_flag**: flag indicating an aggregate summary of all quality tests performed on the data variable, both automated and manual (i.e. a master quality flag for a particular variable)

The following example illustrates the use of three of these flags to represent two independent quality control tests and an aggregate flag that combines the results of the two tests.

*Example 3.3 Ancillary quality flag data*

```
float salinity(time, z);
    salinity:units = "1";
    salinity:long_name = "Salinity";
    salinity:standard_name = "sea_water_practical_salinity";
    salinity:ancillary_variables = "salinity_qc_generic
salinity_qc_flat_line_test salinity_qc_agg";

int salinity_qc_generic(time, z);
    salinity_qc_generic:long_name = "Salinity Generic QC Process Flag";
    salinity_qc_generic:standard_name = "quality_flag";

int salinity_qc_flat_line_test(time, z);
    salinity_qc_flat_line_test:long_name = "Salinity Flat Line Test Flag";
    salinity_qc_flat_line_test:standard_name = "flat_line_test_quality_flag";

int salinity_qc_agg(time, z);
    salinity_qc_agg:long_name = "Salinity Aggregate Flag";
    salinity_qc_agg:standard_name = "aggregate_quality_flag";
```

Note that the ancillary variables in this example are simplified to exclude **flag\_values**, **flag\_masks** and **flag\_meanings** attributes described in [Section 3.5, "Flags"](#) that they would ordinarily require

## 3.5. Flags

The attributes **flag\_values**, **flag\_masks** and **flag\_meanings** are intended to make variables that contain flag values self describing. Status codes and Boolean (binary) condition flags may be



expressed with different combinations of **flag\_values** and **flag\_masks** attribute definitions.

The **flag\_values** and **flag\_meanings** attributes describe a status flag consisting of mutually exclusive coded values. The **flag\_values** attribute is the same type as the variable to which it is attached, and contains a list of the possible flag values. The **flag\_meanings** attribute is a string whose value is a blank separated list of descriptive words or phrases, one for each flag value. Each word or phrase should consist of characters from the alphanumeric set and the following five: '\_', '-', '.', '+', '@'. If multi-word phrases are used to describe the flag values, then the words within a phrase should be connected with underscores. The following example illustrates the use of flag values to express a speed quality with an enumerated status code.

*Example 3.4. A flag variable, using **flag\_values***

```
byte current_speed_qc(time, depth, lat, lon) ;
  current_speed_qc:long_name = "Current Speed Quality" ;
  current_speed_qc:standard_name = "status_flag" ;
  current_speed_qc:_FillValue = -128b ;
  current_speed_qc:valid_range = 0b, 2b ;
  current_speed_qc:flag_values = 0b, 1b, 2b ;
  current_speed_qc:flag_meanings = "quality_good sensor_nonfunctional
                                   outside_valid_range" ;
```

Note that the data variable containing current speed has an **ancillary\_variables** attribute with a value containing **current\_speed\_qc**.

The **flag\_masks** and **flag\_meanings** attributes describe a number of independent Boolean conditions using bit field notation by setting unique bits in each **flag\_masks** value. The **flag\_masks** attribute is the same type as the variable to which it is attached, and contains a list of values matching unique bit fields. The **flag\_meanings** attribute is defined as above, one for each **flag\_masks** value. A flagged condition is identified by performing a bitwise AND of the variable value and each **flag\_masks** value; a non-zero result indicates a true condition. Thus, any or all of the flagged conditions may be true, depending on the variable bit settings. The following example illustrates the use of **flag\_masks** to express six sensor status conditions.

*Example 3.5. A flag variable, using **flag\_masks***

```
byte sensor_status_qc(time, depth, lat, lon) ;
  sensor_status_qc:long_name = "Sensor Status" ;
  sensor_status_qc:standard_name = "status_flag" ;
  sensor_status_qc:_FillValue = 0b ;
  sensor_status_qc:valid_range = 1b, 63b ;
  sensor_status_qc:flag_masks = 1b, 2b, 4b, 8b, 16b, 32b ;
  sensor_status_qc:flag_meanings = "low_battery processor_fault
                                   memory_fault disk_fault
                                   software_fault
                                   maintenance_required" ;
```



A variable with standard name of `region`, `area_type` or any other standard name which requires string-valued values from a defined list may use flags together with `flag_values` and `flag_meanings` attributes to record the translation to the string values. The following example illustrates this using integer flag values for a variable with standard name `region` and `flag_values` selected from the [standardized region names](#) (see section 6.1.1).

*Example 3.6. A region variable, using `flag_values`*

```
int basin(lat, lon);
    standard_name: region;
    flag_values: 1, 2, 3;
    flag_meanings:"atlantic_arctic_ocean indo_pacific_ocean global_ocean";
data:
    basin: 1, 1, 1, 1, 2, ..... ;
```

The `flag_masks`, `flag_values` and `flag_meanings` attributes, used together, describe a blend of independent Boolean conditions and enumerated status codes. The `flag_masks` and `flag_values` attributes are both the same type as the variable to which they are attached. A flagged condition is identified by a bitwise AND of the variable value and each `flag_masks` value; a result that matches the `flag_values` value indicates a `true` condition. Repeated `flag_masks` define a bit field mask that identifies a number of status conditions with different `flag_values`. The `flag_meanings` attribute is defined as above, one for each `flag_masks` bit field and `flag_values` definition. Each `flag_values` and `flag_masks` value must coincide with a `flag_meanings` value. The following example illustrates the use of `flag_masks` and `flag_values` to express two sensor status conditions and one enumerated status code.

*Example 3.7. A flag variable, using `flag_masks` and `flag_values`*

```
byte sensor_status_qc(time, depth, lat, lon) ;
    sensor_status_qc:long_name = "Sensor Status" ;
    sensor_status_qc:standard_name = "status_flag" ;
    sensor_status_qc:FillValue = 0b ;
    sensor_status_qc:valid_range = 1b, 15b ;
    sensor_status_qc:flag_masks = 1b, 2b, 12b, 12b, 12b ;
    sensor_status_qc:flag_values = 1b, 2b, 4b, 8b, 12b ;
    sensor_status_qc:flag_meanings =
        "low_battery
        hardware_fault
        offline_mode calibration_mode maintenance_mode" ;
```

In this case, mutually exclusive values are blended with Boolean values to maximize use of the available bits in a flag value. The table below represents the four binary digits (bits) expressed by the `sensor_status_qc` variable in the previous example.

Bit 0 and Bit 1 are Boolean values indicating a low battery condition and a hardware fault, respectively. The next two bits (Bit 2 and Bit 3) express an enumeration indicating abnormal sensor

operating modes. Thus, if Bit 0 is set, the battery is low and if Bit 1 is set, there is a hardware fault - independent of the current sensor operating mode.

Table 3.2. Flag Variable Bits (from Example)

Bit 3 (MSB)	Bit 2	Bit 1	Bit 0 (LSB)
		H/W Fault	Low Batt

The remaining bits (Bit 2 and Bit 3) are decoded as follows:

Table 3.3. Flag Variable Bit 2 and Bit 3 (from Example)

Bit 3	Bit 2	Mode
0	1	offline_mode
1	0	calibration_mode
1	1	maintenance_mode

The "12b" flag mask is repeated in the `sensor_status_qc flag_masks` definition to explicitly declare the recommended bit field masks to repeatedly AND with the variable value while searching for matching enumerated values. An application determines if any of the conditions declared in the `flag_meanings` list are `true` by simply iterating through each of the `flag_masks` and AND'ing them with the variable. When a result is equal to the corresponding `flag_values` element, that condition is `true`. The repeated `flag_masks` enable a simple mechanism for clients to detect all possible conditions.

# Chapter 4. Coordinate Types

The commonest use of coordinate variables is to locate the data in space and time, but coordinates may be provided for any other continuous geophysical quantity (e.g. density, temperature, radiation wavelength, zenith angle of radiance, sea surface wave frequency) or discrete category (see [Section 4.5, "Discrete Axis"](#), e.g. area type, model level number, ensemble member number) on which the data variable depends.

Four types of coordinates receive special treatment by these conventions: latitude, longitude, vertical, and time. We continue to support the special role that the `units` and `positive` attributes play in the COARDS convention to identify coordinate type. We extend COARDS by providing explicit definitions of dimensionless vertical coordinates. The definitions are associated with a coordinate variable via the `standard_name` and `formula_terms` attributes. For backwards compatibility with COARDS use of these attributes is not required, but is strongly recommended.

Because identification of a coordinate type by its units is complicated by requiring the use of an external software package [\[UDUNITS\]](#) , we provide two optional methods that yield a direct identification. The attribute `axis` may be attached to a coordinate variable and given one of the values `X`, `Y`, `Z` or `T` which stand for a longitude, latitude, vertical, or time axis respectively. Alternatively the `standard_name` attribute may be used for direct identification. But note that these optional attributes are in addition to the required COARDS metadata.

To identify generic spatial coordinates we recommend that the `axis` attribute be attached to these coordinates and given one of the values `X`, `Y` or `Z`. The values `X` and `Y` for the axis attribute should be used to identify horizontal coordinate variables. If both X- and Y-axis are identified, `X-Y-up` should define a right-handed coordinate system, i.e. rotation from the positive X direction to the positive Y direction is anticlockwise if viewed from above. We strongly recommend that coordinate variables be used for all coordinate types whenever they are applicable.

The methods of identifying coordinate types described in this section apply both to coordinate variables and to auxiliary coordinate variables named by the `coordinates` attribute (see [Chapter 5, Coordinate Systems and Domain](#)).

The values of a coordinate variable or auxiliary coordinate variable indicate the locations of the gridpoints. The locations of the boundaries between cells are indicated by bounds variables (see [Section 7.1, "Cell Boundaries"](#)). If bounds are not provided, an application might reasonably assume the gridpoints to be at the centers of the cells, but we do not require that in this standard.

## 4.1. Latitude Coordinate

Variables representing latitude must always explicitly include the `units` attribute; there is no default value. The `units` attribute will be a string formatted as per the `udunits.dat` file. The recommended unit of latitude is `degrees_north`. Also acceptable are `degree_north`, `degree_N`, `degrees_N`, `degreeN`, and `degreesN`.

#### Example 4.1. Latitude axis

```
float lat(lat) ;
  lat:long_name = "latitude" ;
  lat:units = "degrees_north" ;
  lat:standard_name = "latitude" ;
```

Application writers should note that the Udunits package does not recognize the directionality implied by the "north" part of the unit specification. It only recognizes its size, i.e., 1 degree is defined to be  $\pi/180$  radians. Hence, determination that a coordinate is a latitude type should be done via a string match between the given unit and one of the acceptable forms of **degrees\_north**.

Optionally, the latitude type may be indicated additionally by providing the **standard\_name** attribute with the value **latitude**, and/or the **axis** attribute with the value **Y**.

Coordinates of latitude with respect to a rotated pole should be given units of **degrees**, not **degrees\_north** or equivalents, because applications which use the units to identify axes would have no means of distinguishing such an axis from real latitude, and might draw incorrect coastlines, for instance.

## 4.2. Longitude Coordinate

Variables representing longitude must always explicitly include the **units** attribute; there is no default value. The units **attribute** will be a string formatted as per the **udunits.dat** file. The recommended unit of longitude is **degrees\_east**. Also acceptable are **degree\_east**, **degree\_E**, **degrees\_E**, **degreeE**, and **degreesE**.

#### Example 4.2. Longitude axis

```
float lon(lon) ;
  lon:long_name = "longitude" ;
  lon:units = "degrees_east" ;
  lon:standard_name = "longitude" ;
```

Application writers should note that the Udunits package has limited recognition of the directionality implied by the "east" part of the unit specification. It defines **degrees\_east** to be  $\pi/180$  radians, and hence equivalent to **degrees\_north**. We recommend the determination that a coordinate is a longitude type should be done via a string match between the given unit and one of the acceptable forms of **degrees\_east**.

Optionally, the longitude type may be indicated additionally by providing the **standard\_name** attribute with the value **longitude**, and/or the **axis** attribute with the value **X**.

Coordinates of longitude with respect to a rotated pole should be given units of **degrees**, not **degrees\_east** or equivalents, because applications which use the units to identify axes would have

no means of distinguishing such an axis from real longitude, and might draw incorrect coastlines, for instance.

## 4.3. Vertical (Height or Depth) Coordinate

Variables representing dimensional height or depth axes must always explicitly include the **units** attribute; there is no default value.

The direction of positive (i.e., the direction in which the coordinate values are increasing), whether up or down, cannot in all cases be inferred from the units. The direction of positive is useful for applications displaying the data. For this reason the attribute **positive** as defined in the COARDS standard is required if the vertical axis units are not a valid unit of pressure (a determination which can be made using the `udunits` routine, `utScan`)—otherwise its inclusion is optional. The **positive** attribute may have the value **up** or **down** (case insensitive). This attribute may be applied to either coordinate variables or auxiliary coordinate variables that contain vertical coordinate data.

For example, if an oceanographic netCDF file encodes the depth of the surface as 0 and the depth of 1000 meters as 1000 then the axis would use attributes as follows:

```
axis_name:units = "meters" ;  
axis_name:positive = "down" ;
```

If, on the other hand, the depth of 1000 meters were represented as -1000 then the value of the **positive** attribute would have been **up**. If the **units** attribute value is a valid pressure unit the default value of the **positive** attribute is **down**.

A vertical coordinate will be identifiable by:

- units of pressure; or
- the presence of the **positive** attribute with a value of **up** or **down** (case insensitive).

Optionally, the vertical type may be indicated additionally by providing the **standard\_name** attribute with an appropriate value, and/or the **axis** attribute with the value **Z**. If both **positive** and **standard\_name** are provided, it is recommended that they should be consistent. For instance, if a depth of 1000 metres is represented by -1000 and **positive** is **up**, it would be inconsistent to give the **standard\_name** as **depth**, whose definition (vertical distance below the surface) implies positive down. If an application detects such an inconsistency, the user should be warned, and the **positive** attribute should be used to determine the sign convention.

Recommendations: The **positive** attribute should be consistent with the sign convention implied by the definition of the **standard\_name**, if both are provided.

### 4.3.1. Dimensional Vertical Coordinate

The **units** attribute for dimensional coordinates will be a string formatted as per the `udunits.dat` file. The acceptable units for vertical (depth or height) coordinate variables are:

- units of pressure as listed in the file `udunits.dat`. For vertical axes the most commonly used of

these include **bar**, **millibar**, **decibar**, **atmosphere (atm)**, **pascal (Pa)**, and **hPa**.

- units of length as listed in the file `udunits.dat`. For vertical axes the most commonly used of these include **meter (metre, m)**, and **kilometer (km)**.
- other units listed in the file `udunits.dat` that may under certain circumstances reference vertical position such as units of density or temperature.

Plural forms are also acceptable.

### 4.3.2. Dimensionless Vertical Coordinate

The **units** attribute is not required for dimensionless coordinates. For backwards compatibility with COARDS we continue to allow the **units** attribute to take one of the values: **level**, **layer**, or **sigma\_level**. These values are not recognized by the Uduunits package, and are considered a deprecated feature in the CF standard.

### 4.3.3. Parametric Vertical Coordinate

In some cases dimensional vertical coordinates are a function of horizontal location as well as parameters which depend on vertical location, and therefore cannot be stored in the one-dimensional vertical coordinate variable, which is in most of these cases is dimensionless. The **standard\_name** of the parametric (usually dimensionless) vertical coordinate variable can be used to find the definition of the associated computed (always dimensional) vertical coordinate in [Appendix D, Parametric Vertical Coordinates](#). The definition provides a mapping between the parametric vertical coordinate values and computed values that can positively and uniquely indicate the location of the data. The **formula\_terms** attribute can be used to associate terms in the definitions with variables in a netCDF file, and the **computed\_standard\_name** attribute can be used to supply the **standard\_name** of the computed vertical coordinate values computed according to the definition. To maintain backwards compatibility with COARDS the use of these attributes is not required, but is strongly recommended. Some of the definitions may be supplemented with information stored in the **grid\_mapping** variable about the datum used as a vertical reference (e.g. geoid, other geopotential datum or reference ellipsoid; see [Section 5.6, "Horizontal Coordinate Reference Systems, Grid Mappings, and Projections"](#) and [Appendix F, Grid Mappings](#)).

*Example 4.3. Atmosphere sigma coordinate*

```
float lev(lev) ;
  lev:long_name = "sigma at layer midpoints" ;
  lev:positive = "down" ;
  lev:standard_name = "atmosphere_sigma_coordinate" ;
  lev:formula_terms = "sigma: lev ps: PS ptop: PTOP" ;
  lev:computed_standard_name = "air_pressure" ;
```

In this example the **standard\_name** value **atmosphere\_sigma\_coordinate** identifies the following definition from [Appendix D, Parametric Vertical Coordinates](#) which specifies how to compute pressure at gridpoint  $(n, k, j, i)$  where **j** and **i** are horizontal indices, **k** is a vertical index, and **n** is a time index:

$$p(n,k,j,i) = p_{top} + \sigma(k) \cdot (ps(n,j,i) - p_{top})$$

The `formula_terms` attribute associates the variable `lev` with the term `sigma`, the variable `PS` with the term `ps`, and the variable `PTOP` with the term `ptop`. Thus the pressure at gridpoint `(n,k,j,i)` would be calculated by

$$p(n,k,j,i) = P_{TOP} + lev(k) \cdot (PS(n,j,i) - P_{TOP})$$

The `computed_standard_name` attribute indicates that the values in variable `p` would have a `standard_name` of `air_pressure`.

## 4.4. Time Coordinate

Variables representing time must always explicitly include the `units` attribute; there is no default value. The `units` attribute takes a string value formatted as per the recommendations in the Uduunits package [UDUNITS]. The following excerpt from the Uduunits documentation explains the time unit encoding by example:

The specification:

```
seconds since 1992-10-8 15:15:42.5 -6:00
```

indicates seconds since October 8th, 1992 at 3 hours, 15 minutes and 42.5 seconds in the afternoon in the time zone which is six hours to the west of Coordinated Universal Time (i.e. Mountain Daylight Time). The time zone specification can also be written without a colon using one or two-digits (indicating hours) or three or four digits (indicating hours and minutes).

The acceptable units for time are listed in the `udunits.dat` file. The most commonly used of these strings (and their abbreviations) includes `day (d)`, `hour (hr, h)`, `minute (min)` and `second (sec, s)`. Plural forms are also acceptable. The reference time string (appearing after the identifier `since`) may include date alone; date and time; or date, time, and time zone. The reference time is required. A reference time in year 0 has a special meaning (see [Section 7.4, "Climatological Statistics"](#)).

*Note: if the time zone is omitted the default is UTC, and if both time and time zone are omitted the default is 00:00:00 UTC.*

We recommend that the unit `year` be used with caution. The Uduunits package defines a `year` to be exactly 365.242198781 days (the interval between 2 successive passages of the sun through vernal equinox). *It is not a calendar year.* Uduunits includes the following definitions for years: a `common_year` is 365 days, a `leap_year` is 366 days, a `Julian_year` is 365.25 days, and a `Gregorian_year` is 365.2425 days.

For similar reasons the unit `month`, which is defined in `udunits.dat` to be exactly `year/12`, should also



be used with caution.

#### Example 4.4. Time axis

```
double time(time) ;
    time:long_name = "time" ;
    time:units = "days since 1990-1-1 0:0:0" ;
```

A time coordinate is identifiable from its units string alone. The Udunits routines `utScan()` and `utIsTime()` can be used to make this determination.

Optionally, the time coordinate may be indicated additionally by providing the `standard_name` attribute with an appropriate value, and/or the `axis` attribute with the value `T`.

### 4.4.1. Calendar

A date/time is the set of numbers which together identify an instant of time, namely its year, month, day, hour, minute and second, where the second may have a fraction but the others are all integer. A time coordinate value represents a date/time. In order to calculate a time coordinate value from a date/time, or the reverse, one must know the `units` attribute of the time coordinate variable (containing the time unit of the coordinate values and the reference date/time) and the calendar. The choice of calendar defines the set of dates (year-month-day combinations) which are permitted, and therefore it specifies the number of days between the times of `0:0:0` (midnight) on any two dates.

When a time coordinate value is calculated from a date/time, or the reverse, it is assumed that the coordinate value increases by exactly 60 seconds from the start of any minute (identified by year, month, day, hour, minute, all being integers) to the start of the next minute, with no leap seconds, in all CF calendars. This assumption has various consequences when real-world date/times from calendars which do contain leap seconds (such as UTC) are stored in time coordinate variables:

- Any date/times between the end of the 60th second of the last minute of one hour and the start of the first second of the next hour cannot be represented by time coordinates e.g. `2016-12-31 23:59:60.5` cannot be represented.
- A time coordinate value must not be interpreted as representing a date/time in the excluded range. For instance, `60 seconds after 23:59` means `00:00` on the next day.
- A date/time in the excluded range must not be used as a reference date/time e.g. `seconds since 2016-12-31 23:59:60` is not a permitted value for `units`.
- It is important to realise that a time coordinate value does not necessarily exactly equal the actual length of the interval of time between the reference date/time and the date/time it represents.

It is recommended that the calendar be specified by the `calendar` attribute of the time coordinate variable. The values currently defined for `calendar` are:



### gregorian or standard

Mixed Gregorian/Julian calendar as defined by Udunits. *This is the default.*

### proleptic\_gregorian

A Gregorian calendar extended to dates before 1582-10-15. That is, a year is a leap year if either (i) it is divisible by 4 but not by 100 or (ii) it is divisible by 400.

### noleap or 365\_day

Gregorian calendar without leap years, i.e., all years are 365 days long.

### all\_leap or 366\_day

Gregorian calendar with every year being a leap year, i.e., all years are 366 days long.

### 360\_day

All years are 360 days divided into 30 day months.

### julian

Julian calendar.

### none

No calendar.

The **calendar** attribute may be set to **none** in climate experiments that simulate a fixed time of year. The time of year is indicated by the date in the reference time of the **units** attribute. The time coordinate that might apply in a perpetual July experiment are given in the following example.

#### Example 4.5. Perpetual time axis

```
variables:
  double time(time) ;
  time:long_name = "time" ;
  time:units = "days since 1-7-15 0:0:0" ;
  time:calendar = "none" ;
data:
  time = 0., 1., 2., ...;
```

Here, all days simulate the conditions of 15th July, so it does not make sense to give them different dates. The time coordinates are interpreted as 0, 1, 2, etc. days since the start of the experiment.

If none of the calendars defined above applies (e.g., calendars appropriate to a different paleoclimate era), a non-standard calendar can be defined. The lengths of each month are explicitly defined with the **month\_lengths** attribute of the time axis:

### month\_lengths

A vector of size 12, specifying the number of days in the months from January to December (in a non-leap year).

If leap years are included, then two other attributes of the time axis should also be defined:

### leap\_year

An example of a leap year. It is assumed that all years that differ from this year by a multiple of four are also leap years. If this attribute is absent, it is assumed there are no leap years.

### leap\_month

A value in the range 1-12, specifying which month is lengthened by a day in leap years (1=January). If this attribute is not present, February (2) is assumed. This attribute is ignored if **leap\_year** is not specified.

The **calendar** attribute is not required when a non-standard calendar is being used. It is sufficient to define the calendar using the **month\_lengths** attribute, along with **leap\_year**, and **leap\_month** as appropriate. However, the **calendar** attribute is allowed to take non-standard values and in that case defining the non-standard calendar using the appropriate attributes is required.

#### Example 4.6. Paleoclimate time axis

```
double time(time) ;
  time:long_name = "time" ;
  time:units = "days since 1-1-1 0:0:0" ;
  time:calendar = "126 kyr B.P." ;
  time:month_lengths = 34, 31, 32, 30, 29, 27, 28, 28, 28, 32, 32, 34 ;
```

The mixed Gregorian/Julian calendar used by Udunits is explained in the following excerpt from the `udunits(3)` man page:

```
The udunits(3) package uses a mixed Gregorian/Julian calendar system. Dates prior to 1582-10-15 are assumed to use the Julian calendar, which was introduced by Julius Caesar in 46 BCE and is based on a year that is exactly 365.25 days long. Dates on and after 1582-10-15 are assumed to use the Gregorian calendar, which was introduced on that date and is based on a year that is exactly 365.2425 days long. (A year is actually approximately 365.242198781 days long.) Seemingly strange behavior of the udunits(3) package can result if a user-given time interval includes the changeover date. For example, utCalendar() and utInvCalendar() can be used to show that 1582-10-15 *preceded* 1582-10-14 by 9 days.
```

Due to problems caused by the discontinuity in the default mixed Gregorian/Julian calendar, we strongly recommend that this calendar should only be used when the time coordinate does not cross the discontinuity. For time coordinates that do cross the discontinuity the **proleptic\_gregorian** calendar should be used instead.

## 4.5. Discrete Axis

The spatiotemporal coordinates described in sections 4.1-4.4 are continuous variables, and other geophysical quantities may likewise serve as continuous coordinate variables, for instance density, temperature or radiation wavelength. By contrast, for some purposes there is a need for an axis of a data variable which indicates either an ordered list or an unordered collection, and does not correspond to any continuous coordinate variable. Consequently such an axis may be called “discrete”. A discrete axis has a dimension but might not have a coordinate variable. Instead, there might be one or more auxiliary coordinate variables with this dimension (see preamble to section 5). Following sections define various applications of discrete axes, for instance section 6.1.1 “Geographical regions”, section 7.3.3 “Statistics applying to portions of cells”, section 9.3 “Representation of collections of features in data variables”.

# Chapter 5. Coordinate Systems and Domain

A data variable's dimensions are used to locate data values in time and space or as a function of other independent variables. This is accomplished by associating these dimensions with the relevant set of latitude, longitude, vertical, time and any non-spatiotemporal coordinates. This section presents two methods for making that association: the use of *coordinate variables*, and the use of *auxiliary coordinate variables*.

Any of a variable's dimensions that is an independently varying latitude, longitude, vertical, or time dimension (see [Section 1.3, "Terminology"](#)) and that has a size greater than one must have a corresponding coordinate variable, i.e., a one-dimensional variable with the same name as the dimension (see examples in [Chapter 4, Coordinate Types](#)). This is the only method of associating dimensions with coordinates that is supported by [\[COARDS\]](#).

Any longitude, latitude, vertical or time coordinate which depends on more than one spatiotemporal dimension must be identified by the **coordinates** attribute of the data variable. The value of the **coordinates** attribute is *a blank separated list of the names of auxiliary coordinate variables*. There is no restriction on the order in which the auxiliary coordinate variables appear in the **coordinates** attribute string. The dimensions of an auxiliary coordinate variable must be a subset of the dimensions of the variable with which the coordinate is associated, with two exceptions. First, string-valued coordinates ([Section 6.1, "Labels"](#)) will have a dimension for maximum string length if the coordinate variable has a type of **char** rather than a type of **string**. Second, in the ragged array representations of data ([Chapter 9, Discrete Sampling Geometries](#)), special methods are needed to connect the data and coordinates

We recommend that the name of a multidimensional coordinate variable should not match the name of any of its dimensions because that precludes supplying a coordinate variable for the dimension. This practice also avoids potential bugs in applications that determine coordinate variables by only checking for a name match between a dimension and a variable and not checking that the variable is one dimensional.

If the longitude, latitude, vertical or time coordinate is multi-valued, varies in only one dimension, and varies independently of other spatiotemporal coordinates, it is not permitted to store it as an auxiliary coordinate variable. This is both to enhance conformance to COARDS and to facilitate the use of generic applications that recognize the NUG convention for coordinate variables. An application that is trying to find the latitude coordinate of a variable should always look first to see if any of the variable's dimensions correspond to a latitude coordinate variable. If the latitude coordinate is not found this way, then the auxiliary coordinate variables listed by the **coordinates** attribute should be checked. Note that it is permissible, but optional, to list coordinate variables as well as auxiliary coordinate variables in the **coordinates** attribute. If the longitude, latitude, vertical or time coordinate is single-valued, it may be stored either as a coordinate variable with a dimension of size one, or as a scalar coordinate variable ([Section 5.7, "Scalar Coordinate Variables"](#)).

If an **axis** attribute is attached to an auxiliary coordinate variable, it can be used by applications in the same way the **axis** attribute attached to a coordinate variable is used. However, it is not permissible for a data variable to have both a coordinate variable and an auxiliary coordinate variable, or more than one of either type of variable, having an **axis** attribute with any given value e.g. there must be no more than one **axis** attribute for **X** for any data variable. Note that if the **axis**

attribute is not specified for an auxiliary coordinate variable, it may still be possible to determine if it is a spatiotemporal dimension from its own units or `standard_name`, or from the units and `standard_name` of the coordinate variable corresponding to its dimensions (see [Chapter 4, Coordinate Types](#)). For instance, auxiliary coordinate variables which lie on the horizontal surface can be identified as such by their dimensions being horizontal. Horizontal dimensions are those whose coordinate variables have an `axis` attribute of `X` or `Y`, or a `units` attribute indicating latitude and longitude.

To geo-reference data horizontally with respect to the Earth, a *grid mapping variable* may be provided by the data variable, using the `grid_mapping` attribute. If the coordinate variables for a horizontal grid are not longitude and latitude, then a `grid_mapping` variable provides the information required to derive longitude and latitude values for each grid location. If no *grid mapping variable* is referenced by a data variable, then longitude and latitude coordinate values shall be supplied *in addition* to the required coordinates. For example, the Cartesian coordinates of a map projection may be supplied as coordinate variables and, in addition, two-dimensional latitude and longitude variables may be supplied via the `coordinates` attribute on a data variable. The use of the `axis` attribute with values `X` and `Y` is recommended for the coordinate variables (see [Chapter 4, Coordinate Types](#)).

It is sometimes not practical to specify the latitude-longitude location of data which is representative of geographic regions with complex boundaries. For this purpose, provision is made in [Section 6.1.1, "Geographic Regions"](#) for indicating the region by a standardized name.

## 5.1. Independent Latitude, Longitude, Vertical, and Time Axes

When each of a variable's spatiotemporal dimensions is a latitude, longitude, vertical, or time dimension, then each axis is identified by a coordinate variable.

```
dimensions:
  lat = 18 ;
  lon = 36 ;
  pres = 15 ;
  time = 4 ;
variables:
  float xwind(time,pres,lat,lon) ;
    xwind:long_name = "zonal wind" ;
    xwind:units = "m/s" ;
  float lon(lon) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(lat) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  float pres(pres) ;
    pres:long_name = "pressure" ;
    pres:units = "hPa" ;
  double time(time) ;
    time:long_name = "time" ;
    time:units = "days since 1990-1-1 0:0:0" ;
```

`xwind(n,k,j,i)` is associated with the coordinate values `lon(i)`, `lat(j)`, `pres(k)`, and `time(n)`.

## 5.2. Two-Dimensional Latitude, Longitude, Coordinate Variables

The latitude and longitude coordinates of a horizontal grid that was not defined as a Cartesian product of latitude and longitude axes, can sometimes be represented using two-dimensional coordinate variables. These variables are identified as coordinates by use of the `coordinates` attribute.

```
dimensions:
  xc = 128 ;
  yc = 64 ;
  lev = 18 ;
variables:
  float T(lev,yc,xc) ;
    T:long_name = "temperature" ;
    T:units = "K" ;
    T:coordinates = "lon lat" ;
  float xc(xc) ;
    xc:axis = "X" ;
    xc:long_name = "x-coordinate in Cartesian system" ;
    xc:units = "m" ;
  float yc(yc) ;
    yc:axis = "Y" ;
    yc:long_name = "y-coordinate in Cartesian system" ;
    yc:units = "m" ;
  float lev(lev) ;
    lev:long_name = "pressure level" ;
    lev:units = "hPa" ;
  float lon(yc,xc) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(yc,xc) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
```

$T(k,j,i)$  is associated with the coordinate values  $lon(j,i)$ ,  $lat(j,i)$ , and  $lev(k)$ . The vertical coordinate is represented by the coordinate variable  $lev(lev)$  and the latitude and longitude coordinates are represented by the auxiliary coordinate variables  $lat(yc,xc)$  and  $lon(yc,xc)$  which are identified by the `coordinates` attribute.

Note that coordinate variables are also defined for the `xc` and `yc` dimensions. This facilitates processing of this data by generic applications that don't recognize the multidimensional latitude and longitude coordinates.

### 5.3. Reduced Horizontal Grid

A "reduced" longitude-latitude grid is one in which the points are arranged along constant latitude lines with the number of points on a latitude line decreasing toward the poles. Storing this type of gridded data in two-dimensional arrays wastes space, and results in the presence of missing values in the 2D coordinate variables. We recommend that this type of gridded data be stored using the compression scheme described in [Section 8.2, "Compression by Gathering"](#). Compression by gathering preserves structure by storing a set of indices that allows an application to easily scatter the compressed data back to two-dimensional arrays. The compressed latitude and longitude

auxiliary coordinate variables are identified by the **coordinates** attribute.

*Example 5.3. Reduced horizontal grid*

```
dimensions:
  londim = 128 ;
  latdim = 64 ;
  rgrid = 6144 ;
variables:
  float PS(rgrid) ;
    PS:long_name = "surface pressure" ;
    PS:units = "Pa" ;
    PS:coordinates = "lon lat" ;
  float lon(rgrid) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(rgrid) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  int rgrid(rgrid);
    rgrid:compress = "latdim londim";
```

**PS(n)** is associated with the coordinate values **lon(n)**, **lat(n)**. Compressed grid index (**n**) would be assigned to 2D index (**j,i**) (C index conventions) where

```
j = rgrid(n) / 128
i = rgrid(n) - 128*j
```

Notice that even if an application does not recognize the **compress** attribute, the grids stored in this format can still be handled, by an application that recognizes the **coordinates** attribute.

## 5.4. Timeseries of Station Data

*This section has been superseded by the treatment of time series as a type of discrete sampling geometry in Chapter 9.*

## 5.5. Trajectories

*This section has been superseded by the treatment of time series as a type of discrete sampling geometry in Chapter 9.*

## 5.6. Horizontal Coordinate Reference Systems, Grid Mappings, and Projections

A *grid mapping variable* may be referenced by a data variable in order to explicitly declare the



coordinate reference system (CRS) used for the horizontal spatial coordinate values. For example, if the horizontal spatial coordinates are latitude and longitude, the grid mapping variable can be used to declare the figure of the earth (WGS84 ellipsoid, sphere, etc.) they are based on. If the horizontal spatial coordinates are easting and northing in a map projection, the grid mapping variable declares the map projection CRS used and provides the information needed to calculate latitude and longitude from easting and northing.

When the horizontal spatial coordinate variables are not longitude and latitude, it is required that further information is provided to geo-locate the horizontal position. A *grid mapping variable* provides this information.

If no *grid mapping variable* is provided and the coordinate variables for a horizontal grid are not longitude and latitude, then it is required that the latitude and longitude coordinates are supplied via the **coordinates** attribute. Such coordinates may be provided in addition to the provision of a *grid mapping variable*, but that is not required.

A grid mapping variable provides the description of the mapping via a collection of attached attributes. It is of arbitrary type since it contains no data. Its purpose is to act as a container for the attributes that define the mapping. The one attribute that all grid mapping variables must have is **grid\_mapping\_name**, which takes a string value that contains the mapping's name. The other attributes that define a specific mapping depend on the value of **grid\_mapping\_name**. The valid values of **grid\_mapping\_name** along with the attributes that provide specific map parameter values are described in [Appendix F, Grid Mappings](#)

The grid mapping variables are associated with the data and coordinate variables by the **grid\_mapping** attribute. This attribute is attached to data variables so that variables with different mappings may be present in a single file. The attribute takes a string value with two possible formats. In the first format, it is a single word, which names a grid mapping variable. In the second format, it is a blank-separated list of words "`<gridMappingVariable>: <coordinatesVariable> [<coordinatesVariable>] [<coordinatesVariable> ...] [<gridMappingVariable>: <coordinatesVariable>...]`" , which identifies one or more grid mapping variables, and with each grid mapping associates one or more `coordinatesVariables`, i.e. coordinate variables or auxiliary coordinate variables.

Where an extended "`<gridMappingVariable>: <coordinatesVariable> [<coordinatesVariable>]`" entity is defined, then the order of the `<coordinatesVariable>` references within the definition provides an explicit order for these coordinate value variables, which is used if they are to be combined into individual coordinate tuples.

This order is only significant if `crs_wkt` is also specified within the referenced grid mapping variable. Explicit 'axis order' is important when the `grid_mapping_variable` contains an attribute `crs_wkt` as it is mandated by the OGC CRS-WKT standard that coordinate tuples with correct axis order are provided as part of the reference to a Coordinate Reference System.

Using the simple form, where the **grid\_mapping** attribute is only the name of a grid mapping variable, 2D latitude and longitude coordinates for a projected coordinate reference system use the same geographic coordinate reference system (ellipsoid and prime meridian) as the projection is projected from.

The **grid\_mapping** variable may identify datums (such as the reference ellipsoid, the geoid or the prime meridian) for horizontal or vertical coordinates. Therefore a grid mapping variable may be

needed when the coordinate variables for a horizontal grid are longitude and latitude. The `grid_mapping_name` of `latitude_longitude` should be used in this case.

The expanded form of the `grid_mapping attribute` is required if one wants to store coordinate information for more than one coordinate reference system. In this case each coordinate or auxiliary coordinate is defined explicitly with respect to no more than one `grid_mapping` variable. This syntax may be used to explicitly link coordinates and grid mapping variables where only one coordinate reference system is used. In this case, all coordinates and auxiliary coordinates of the data variable not named in the `grid_mapping` attribute are unrelated to any grid mapping variable. All coordinate names listed in the `grid_mapping` attribute must be coordinate variables or auxiliary coordinates of the data variable.

In order to make use of a grid mapping to directly calculate latitude and longitude values it is necessary to associate the coordinate variables with the independent variables of the mapping. This is done by assigning a `standard_name` to the coordinate variable. The appropriate values of the `standard_name` depend on the grid mapping and are given in [Appendix F, Grid Mappings](#).

### Example 5.6. Rotated pole grid

```
dimensions:
  rlon = 128 ;
  rlat = 64 ;
  lev = 18 ;
variables:
  float T(lev,rlat,rlon) ;
    T:long_name = "temperature" ;
    T:units = "K" ;
    T:coordinates = "lon lat" ;
    T:grid_mapping = "rotated_pole" ;
  char rotated_pole ;
    rotated_pole:grid_mapping_name = "rotated_latitude_longitude" ;
    rotated_pole:grid_north_pole_latitude = 32.5 ;
    rotated_pole:grid_north_pole_longitude = 170. ;
  float rlon(rlon) ;
    rlon:long_name = "longitude in rotated pole grid" ;
    rlon:units = "degrees" ;
    rlon:standard_name = "grid_longitude";
  float rlat(rlat) ;
    rlat:long_name = "latitude in rotated pole grid" ;
    rlat:units = "degrees" ;
    rlat:standard_name = "grid_latitude";
  float lev(lev) ;
    lev:long_name = "pressure level" ;
    lev:units = "hPa" ;
  float lon(rlat,rlon) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(rlat,rlon) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
```

A CF compliant application can determine that `rlon` and `rlat` are longitude and latitude values in the rotated grid by recognizing the standard names `grid_longitude` and `grid_latitude`. Note that the units of the rotated longitude and latitude axes are given as `degrees`. This should prevent a COARDS compliant application from mistaking the variables `rlon` and `rlat` to be actual longitude and latitude coordinates. The entries for these names in the standard name table indicate the appropriate sign conventions for the units of `degrees`.

### Example 5.7. Lambert conformal projection

```
dimensions:
  y = 228;
  x = 306;
  time = 41;

variables:
  int Lambert_Conformal;
    Lambert_Conformal:grid_mapping_name = "lambert_conformal_conic";
    Lambert_Conformal:standard_parallel = 25.0;
    Lambert_Conformal:longitude_of_central_meridian = 265.0;
    Lambert_Conformal:latitude_of_projection_origin = 25.0;
  double y(y);
    y:units = "km";
    y:long_name = "y coordinate of projection";
    y:standard_name = "projection_y_coordinate";
  double x(x);
    x:units = "km";
    x:long_name = "x coordinate of projection";
    x:standard_name = "projection_x_coordinate";
  double lat(y, x);
    lat:units = "degrees_north";
    lat:long_name = "latitude coordinate";
    lat:standard_name = "latitude";
  double lon(y, x);
    lon:units = "degrees_east";
    lon:long_name = "longitude coordinate";
    lon:standard_name = "longitude";
  int time(time);
    time:long_name = "forecast time";
    time:units = "hours since 2004-06-23T22:00:00Z";
  float Temperature(time, y, x);
    Temperature:units = "K";
    Temperature:long_name = "Temperature @ surface";
    Temperature:missing_value = 9999.0;
    Temperature:coordinates = "lat lon";
    Temperature:grid_mapping = "Lambert_Conformal";
```

An application can determine that `x` and `y` are the projection coordinates by recognizing the standard names `projection_x_coordinate` and `projection_y_coordinate`. The grid mapping variable `Lambert_Conformal` contains the mapping parameters as attributes, and is associated with the `Temperature` variable via its `grid_mapping` attribute.

*Example 5.8. Latitude and longitude on a spherical Earth*

```
dimensions:
  lat = 18 ;
  lon = 36 ;
variables:
  double lat(lat) ;
  double lon(lon) ;
  float temp(lat, lon) ;
    temp:long_name = "temperature" ;
    temp:units = "K" ;
    temp:grid_mapping = "crs" ;
  int crs ;
    crs:grid_mapping_name = "latitude_longitude"
    crs:semi_major_axis = 6371000.0 ;
    crs:inverse_flattening = 0 ;
```

*Example 5.9. Latitude and longitude on the WGS 1984 datum*

```
dimensions:
  lat = 18 ;
  lon = 36 ;
variables:
  double lat(lat) ;
  double lon(lon) ;
  float temp(lat, lon) ;
    temp:long_name = "temperature" ;
    temp:units = "K" ;
    temp:grid_mapping = "crs" ;
  int crs ;
    crs:grid_mapping_name = "latitude_longitude";
    crs:longitude_of_prime_meridian = 0.0 ;
    crs:semi_major_axis = 6378137.0 ;
    crs:inverse_flattening = 298.257223563 ;
```

*Example 5.10. British National Grid*



```

dimensions:
  z = 100;
  y = 100000 ;
  x = 100000 ;
variables:
  double x(x) ;
    x:standard_name = "projection_x_coordinate" ;
    x:long_name = "Easting" ;
    x:units = "m" ;
  double y(y) ;
    y:standard_name = "projection_y_coordinate" ;
    y:long_name = "Northing" ;
    y:units = "m" ;
  double z(z) ;
    z:standard_name = "height_above_reference_ellipsoid" ;
    z:long_name = "height_above_osgb_newlyn_datum_masl" ;
    z:units = "m" ;
  double lat(y, x) ;
    lat:standard_name = "latitude" ;
    lat:units = "degrees_north" ;
  double lon(y, x) ;
    lon:standard_name = "longitude" ;
    lon:units = "degrees_east" ;
  float temp(z, y, x) ;
    temp:standard_name = "air_temperature" ;
    temp:units = "K" ;
    temp:coordinates = "lat lon" ;
    temp:grid_mapping = "crsOSGB: x y crsWGS84: lat lon" ;
  float pres(z, y, x) ;
    pres:standard_name = "air_pressure" ;
    pres:units = "Pa" ;
    pres:coordinates = "lat lon" ;
    pres:grid_mapping = "crsOSGB: x y crsWGS84: lat lon" ;
  int crsOSGB ;
    crsOSGB:grid_mapping_name = "transverse_mercator";
    crsOSGB:semi_major_axis = 6377563.396 ;
    crsOSGB:inverse_flattening = 299.3249646 ;
    crsOSGB:longitude_of_prime_meridian = 0.0 ;
    crsOSGB:latitude_of_projection_origin = 49.0 ;
    crsOSGB:longitude_of_central_meridian = -2.0 ;
    crsOSGB:scale_factor_at_central_meridian = 0.9996012717 ;
    crsOSGB:false_easting = 400000.0 ;
    crsOSGB:false_northing = -100000.0 ;
    crsOSGB:unit = "metre" ;
  int crsWGS84 ;
    crsWGS84:grid_mapping_name = "latitude_longitude";
    crsWGS84:longitude_of_prime_meridian = 0.0 ;
    crsWGS84:semi_major_axis = 6378137.0 ;
    crsWGS84:inverse_flattening = 298.257223563 ;

```

### 5.6.1. Use of the CRS Well-known Text Format

An optional grid mapping attribute called `crs_wkt` may be used to specify multiple coordinate system properties in so-called *well-known text* format (usually abbreviated to CRS WKT or OGC WKT). The CRS WKT format is widely recognised and used within the geoscience software community. As such it represents a versatile mechanism for encoding information about a variety of coordinate reference system parameters in a highly compact notational form. The translation of CF coordinate variables to/from OGC Well-Known Text (WKT) format is shown in Examples 5.11 and 5.12 below and described in detail in <https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements>.

The `crs_wkt` attribute should comprise a text string that conforms to the WKT syntax as specified in reference [OGC\_WKT-CRS]. If desired the text string may contain embedded newline characters to aid human readability. However, any such characters are purely cosmetic and do not alter the meaning of the attribute value. It is envisaged that the value of the `crs_wkt` attribute typically will be a single line of text, one intended primarily for machine processing. Other than the requirement to be a valid WKT string, the CF convention does not prescribe the content of the `crs_wkt` attribute since it will necessarily be context-dependent.

Where a `crs_wkt` attribute is added to a `grid_mapping`, the extended syntax for the `grid_mapping` attribute enables the list of variables containing coordinate values being referenced to be explicitly stated and the CRS WKT Axis order to be explicitly defined. The explicit definition of WKT CRS Axis order is expected by the OGC standards for referencing by coordinates. Software implementing these standards are likely to expect to receive coordinate value tuples, with the correct coordinate value order, along with the coordinate reference system definition that those coordinate values are defined with respect to.

The order of the `<coordinatesVariable>` references within the `grid_mapping` attribute definition defines the order of elements within a derived coordinate value tuple. This enables an application reading the data from a file to construct an array of coordinate value tuples, where each tuple is ordered to match the specification of the coordinate reference system being used whilst the array of tuples is structured according to the netCDF definition. It is the responsibility of the data producer to ensure that the `<coordinatesVariable>` list is consistent with the CRS WKT definition of CS AXIS, with the correct number of entries in the correct order (note: this is not a conformance requirement as CF conformance is not dependent on CRS WKT parsing).

For example, a file has two coordinate variables, `lon` and `lat`, and a grid mapping variable `crs` with an associated `crs_wkt` attribute; the WKT definition defines the AXIS order as ["latitude", "longitude"]. The `grid_mapping` attribute is thus given a value `crs:lat lon` to define that where coordinate pairs are required, these shall be ordered (lat, lon), to be consistent with the provided `crs_wkt` string (and not order inverted). A 2-D array of (lat, lon) tuples can then be explicitly derived from the combination of the `lat` and `lon` variables.

The `crs_wkt` attribute is intended to act as a *supplement* to other single-property CF grid mapping attributes (as described in Appendix F); it is not intended to replace those attributes. If data producers omit the single-property grid mapping attributes in favour of the `crs_wkt` attribute, software which cannot interpret `crs_wkt` will be unable to use the `grid_mapping` information. Therefore the CRS should be described as thoroughly as possible with the single-property grid mapping attributes as well as by `crs_wkt`.



In cases where CRS property values can be represented by both a single-property grid mapping attribute and the `crs_wkt` attribute, the grid mapping should be provided, and if both are provided, the onus is on data producers to ensure that their property values are consistent. Therefore information from either one (or both) may be read in by the user without needing to check both. However, if the two values of a given property are different, the CRS information cannot be interpreted accurately and users should inform the provider so the issue can be addressed. For example, if the semi-major axis length of the ellipsoid defined by the grid mapping attribute `semi_major_axis` disagrees with the `crs_wkt` attribute (via the `WKT SPHEROID[...]` element), the value of this attribute cannot be interpreted accurately. Naturally if the two values are equal then no ambiguity arises.

Likewise, in those cases where the value of a CRS WKT element should be used consistently across the CF-netCDF community (names of projections and projection parameters, for example) then, the values shown in <https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements> should be preferred; these are derived from the OGP/EPSSG registry of geodetic parameters, which is considered to represent the definitive authority as regards CRS property names and values.

Examples 5.11 illustrates how the coordinate system properties specified via the `crs` grid mapping variable in Example 5.9 might be expressed using a `crs_wkt` attribute. Example 5.12 also illustrates the addition of the `crs_wkt` attribute, but here the attribute is added to the `crs` variable of a simplified variant of Example 5.10. For brevity in Example 5.11, only the grid mapping variable and its `grid_mapping_name` and `crs_wkt` attributes are included; all other elements are as per the Example 5.9. Names of projection PARAMETERS follow the spellings used in the EPSG geodetic parameter registry.

Example 5.12 illustrates how certain WKT elements - all of which are optional - can be used to specify CRS properties not covered by existing CF grid mapping attributes, including:

- use of the `VERT_DATUM` element to specify vertical datum information
- use of additional `PARAMETER` elements (albeit not essential ones in this example) to define the location of the false origin of the projection
- use of `AUTHORITY` elements to specify object identifier codes assigned by an external authority, OGP/EPSSG in this instance

*Example 5.11. Latitude and longitude on the WGS 1984 datum + CRS WKT*

```
...
float data(latitude, longitude) ;
  data:grid_mapping = "crs: latitude, longitude" ;
  ...
int crs ;
  crs:grid_mapping_name = "latitude_longitude";
  crs:longitude_of_prime_meridian = 0.0 ;
  crs:semi_major_axis = 6378137.0 ;
  crs:inverse_flattening = 298.257223563 ;
  crs:crs_wkt =
    GEODCRS["WGS 84",
      DATUM["World Geodetic System 1984",
        ELLIPSOID["WGS 84",6378137,298.257223563,
          LENGTHUNIT["metre",1.0]]],
      PRIMEM["Greenwich",0],
      CS[ellipsoidal,3],
        AXIS["(lat)",north,ANGLEUNIT["degree",0.0174532925199433]],
        AXIS["(lon)",east,ANGLEUNIT["degree",0.0174532925199433]],
        AXIS["ellipsoidal height (h)",up,LENGTHUNIT["metre",1.0]]]
  ...
```

Note: To enhance readability of these examples, the WKT value has been split across multiple lines and embedded quotation marks (") left unescaped - in real netCDF files such characters would need to be escaped. In CDL, within the CRS WKT definition string, newlines would need to be encoded within the string as `\n` and double quotes as `\`". Also for readability, we have dropped the quotation marks which would delimit the entire `crs_wkt` string. This pseudo CDL will not parse directly.

```

dimensions:
  lat = 648 ;
  lon = 648 ;
  y = 18 ;
  x = 36 ;
variables:
  double x(x) ;
    x:standard_name = "projection_x_coordinate" ;
    x:units = "m" ;
  double y(y) ;
    y:standard_name = "projection_y_coordinate" ;
    y:units = "m" ;
  float temp(y, x) ;
    temp:long_name = "temperature" ;
    temp:units = "K" ;
    temp:coordinates = "lat lon" ;
    temp:grid_mapping = "crs: x y" ;
  int crs ;
    crs:grid_mapping_name = "transverse_mercator" ;
    crs:longitude_of_central_meridian = -2. ;
    crs:false_easting = 400000. ;
    crs:false_northing = -100000. ;
    crs:latitude_of_projection_origin = 49. ;
    crs:scale_factor_at_central_meridian = 0.9996012717 ;
    crs:longitude_of_prime_meridian = 0. ;
    crs:semi_major_axis = 6377563.396 ;
    crs:inverse_flattening = 299.324964600004 ;
    crs:projected_coordinate_system_name = "OSGB 1936 / British National Grid" ;
    crs:geographic_coordinate_system_name = "OSGB 1936" ;
    crs:horizontal_datum_name = "OSGB_1936" ;
    crs:reference_ellipsoid_name = "Airy 1830" ;
    crs:prime_meridian_name = "Greenwich" ;
    crs:towgs84 = 375., -111., 431., 0., 0., 0., 0. ;
    crs:crs_wkt = "COMPOUNDCRS ["OSGB 1936 / British National Grid + ODN",
      PROJCRS ["OSGB 1936 / British National Grid",
        GEODCRS ["OSGB 1936",
          DATUM ["OSGB 1936",
            ELLIPSOID ["Airy 1830", 6377563.396, 299.3249646,
              LENGTHUNIT["metre",1.0]],
            TOWGS84[375, -111, 431, 0, 0, 0, 0]
          ],
          PRIMEM ["Greenwich", 0],
          UNIT ["degree", 0.0174532925199433]
        ],
        CONVERSION["OSGB",
          METHOD["Transverse Mercator",
            PARAMETER["False easting", 400000, LENGTHUNIT["metre",1.0]],
            PARAMETER["False northing", -100000, LENGTHUNIT["metre",1.0]],

```

```

PARAMETER["Longitude of natural origin", -2.0,
  ANGLEUNIT["degree",0.0174532925199433]],
PARAMETER["Latitude of natural origin", 49.0,
  ANGLEUNIT["degree",0.0174532925199433]],
PARAMETER["Longitude of false origin", -7.556,
  ANGLEUNIT["degree",0.0174532925199433]],
PARAMETER["Latitude of false origin", 49.766,
  ANGLEUNIT["degree",0.0174532925199433]],
PARAMETER["Scale factor at natural origin", 0.9996012717,
SCALEUNIT["Unity",1.0]],
  AUTHORITY["EPSG", "27700"]]
CS[Cartesian,2],
  AXIS["easting (X)",east],
  AXIS["northing (Y)",north],
  LENGTHUNIT["metre", 1.0],
],
VERTCRS ["Newlyn",
  VDATUM ["Ordnance Datum Newlyn", 2005],
  AUTHORITY ["EPSG", "5701"]
  CS[vertical,1],
  AXIS["gravity-related height (H)",up],
  LENGTHUNIT["metre",1.0]
]
]" ;
...

```

Note: There are unescaped double quotes and newlines and the quotation marks which would delimit the entire crs\_wkt string are missing in this example. This is to enhance readability, but it means that this pseudo CDL will not parse directly.

The preceding two example (5.11 and 5.12) may be combined, if the data provider desires to provide explicit latitude and longitude coordinates as well as projection coordinates and to provide CRS WKT referencing for both sets of coordinates. This is demonstrated in example 5.13

```
...
double x(x) ;
  x:standard_name = "projection_x_coordinate" ;
  x:units = "m" ;
double y(y) ;
  y:standard_name = "projection_y_coordinate" ;
  y:units = "m" ;
double lat(y, x) ;
  lat_standard_name = "latitude" ;
  lat:units = "degrees_north" ;
double lon(y, x) ;
  lon_standard_name = "longitude" ;
  lon:units = "degrees_east" ;
float temp(y, x) ;
  temp:long_name = "temperature" ;
  temp:units = "K" ;
  temp:coordinates = "lat lon" ;
  temp:grid_mapping = "crs_osgb: x y crs_wgs84: latitude longitude" ;
...
int crs_wgs84 ;
  crs_wgs84:grid_mapping_name = "latitude_longitude";
  crs_wgs84:crs_wkt = ...
int crs_osgb ;
  crs_osgb:grid_mapping_name = "transverse_mercator" ;
  crs_osgb:crs_wkt = ...
...
```

Note: There are unescaped double quotes and newlines and the quotation marks which would delimit the entire `crs_wkt` string are missing in this example. This is to enhance readability, but it means that this pseudo CDL will not parse directly.

## 5.7. Scalar Coordinate Variables

When a variable has an associated coordinate which is single-valued, that coordinate may be represented as a scalar variable (i.e. a data variable which has no netCDF dimensions). Since there is no associated dimension these scalar coordinate variables should be attached to a data variable via the `coordinates` attribute.

The use of scalar coordinate variables is a convenience feature which avoids adding size one dimensions to variables. A numeric scalar coordinate variable has the same information content and can be used in the same contexts as a size one numeric coordinate variable. Similarly, a string-valued scalar coordinate variable has the same meaning and purposes as a size one string-valued auxiliary coordinate variable ([Section 6.1, "Labels"](#)). Note however that use of this feature with a latitude, longitude, vertical, or time coordinate will inhibit COARDS conforming applications from recognizing them.

Once a name is used for a scalar coordinate variable it can not be used for a 1D coordinate variable. For this reason we strongly recommend against using a name for a scalar coordinate variable that matches the name of any dimension in the file.

If a data variable has two or more scalar coordinate variables, they are regarded as though they were all independent coordinate variables with dimensions of size one. If two or more single-valued coordinates are not independent, but have related values (this might be the case, for instance, for time and forecast period, or vertical coordinate and model level number, [Section 6.2, "Alternative Coordinates"](#)), they should be stored as coordinate or auxiliary coordinate variables of the same size one dimension, not as scalar coordinate variables.

*Example 5.14. Multiple forecasts from a single analysis*

```
dimensions:
  lat = 180 ;
  lon = 360 ;
  time = UNLIMITED ;
variables:
  double atime
    atime:standard_name = "forecast_reference_time" ;
    atime:units = "hours since 1999-01-01 00:00" ;
  double time(time);
    time:standard_name = "time" ;
    time:units = "hours since 1999-01-01 00:00" ;
  double lon(lon) ;
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  double lat(lat) ;
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  double p500
    p500:long_name = "pressure" ;
    p500:units = "hPa" ;
    p500:positive = "down" ;
  float height(time,lat,lon);
    height:long_name = "geopotential height" ;
    height:standard_name = "geopotential_height" ;
    height:units = "m" ;
    height:coordinates = "atime p500" ;
data:
  time = 6., 12., 18., 24. ;
  atime = 0. ;
  p500 = 500. ;
```

In this example both the analysis time and the single pressure level are represented using scalar coordinate variables. The analysis time is identified by the standard name "forecast\_reference\_time" while the valid time of the forecast is identified by the standard name "time".

## 5.8. Domain Variables

A domain describes data locations and cell properties. It defines cells that span a collection of dimensions with cell coordinates, cell measures, and coordinate reference systems.

A data variable defines its domain via its own attributes, but a domain variable provides the description of a domain in the absence of any data values. The variable should be a scalar (i.e. it has no dimensions) of arbitrary type, and the value of its single element is immaterial. It acts as a container for the attributes that define the domain. The purpose of a domain variable is to provide domain information to applications that have no need of data values at the domain's locations, thus removing any ambiguity when retrieving a domain from a dataset. Ancillary variables and cell methods are not part of the domain, because they are only defined in relation to data values.

The domain variable supports the same attributes as are allowed on a data variable for describing a domain, with exactly the same meanings and syntaxes, as described in [Appendix A, Attributes](#). If an attribute is needed by a particular data variable to describe its domain, then that attribute would also be needed by the equivalent domain variable.

The dimensions of the domain must be stored with the **dimensions** attribute, and the presence of a **dimensions** attribute will identify the variable as a domain variable. Therefore the **dimensions** attribute must not be present on any variables that are to be interpreted as data variables. It is necessary to list these dimensions, rather than inferring them from the contents of the other attributes, as it can not be guaranteed that the referenced variables span all of the required dimensions (as could be the case for a discrete axis, for instance). The value of the **dimensions** attribute is a blank separated list of the dimension names. There is no restriction on the order in which the dimensions appear in the **dimensions** attribute string. If a domain has no named dimensions then the value of the **dimensions** attribute must be an empty string, as could be the case if the dimensions of the domain are all defined implicitly by scalar coordinate variables.

The dimensions listed by the **dimensions** attribute constrain the dimensions that may be spanned by variables referenced from any of the other attributes, in the same way that the array dimensions perform that role for a data variable. For instance, all variables named by the **cell\_measures** attribute ([Section 7.2, "Cell Measures"](#)) of a domain variable must span a subset of zero or more of the dimensions given by the **dimensions** attribute.

It is optional for coordinate variables to be listed by a domain variable's **coordinates** attribute. Any coordinate variable that shares its name with a dimension given by the **dimensions** attribute will be considered as part of the domain definition.

It is recommended that a domain variable has a **long\_name** attribute to describe its contents.

It is recommended that a domain variable does not have any of the attributes marked in [Appendix A, Attributes](#) as applicable to data variables except those which are also marked as applicable to domain variables.

Multiple domain variables may exist in a file with, or without, data variables. Note that the data variable attributes describing its domain can not be replaced by a reference to a domain variable.

Example 5.15. A domain with independent coordinate variables.

```
dimensions:  
  lat = 18 ;  
  lon = 36 ;  
  pres = 15 ;  
  time = 4 ;  
  
variables:  
  char domain ;  
    domain:dimensions = "time pres lat lon" ;  
    domain:long_name = "Domain with independent coordinate variables" ;  
  float lon(lon) ;  
    lon:long_name = "longitude" ;  
    lon:units = "degrees_east" ;  
  float lat(lat) ;  
    lat:long_name = "latitude" ;  
    lat:units = "degrees_north" ;  
  float pres(pres) ;  
    pres:long_name = "pressure" ;  
    pres:units = "hPa" ;  
  double time(time) ;  
    time:long_name = "time" ;  
    time:units = "days since 1990-1-1 0:0:0" ;
```

In this example the data variable **xwind** from the [Independent coordinate variables](#) example has been replaced by the domain variable **domain**.



Example 5.16. A domain with a rotated pole grid and a scalar coordinate variable.

```
dimensions:
  rlon = 128 ;
  rlat = 64 ;
  lev = 18 ;

variables:
  char domain ;
    domain:dimensions = "lev rlat rlon" ;
    domain:coordinates = "lon lat time" ;
    domain:grid_mapping = "rotated_pole" ;
    domain:long_name = "Domain with grid mapping and scalar coordinate" ;
  char rotated_pole ;
    rotated_pole:grid_mapping_name = "rotated_latitude_longitude" ;
    rotated_pole:grid_north_pole_latitude = 32.5 ;
    rotated_pole:grid_north_pole_longitude = 170. ;
  double time
    time:standard_name = "time" ;
    time:units = "days since 2000-12-01 00:00" ;
  float rlon(rlon) ;
    rlon:long_name = "longitude in rotated pole grid" ;
    rlon:units = "degrees" ;
    rlon:standard_name = "grid_longitude" ;
  float rlat(rlat) ;
    rlat:long_name = "latitude in rotated pole grid" ;
    rlat:units = "degrees" ;
    rlat:standard_name = "grid_latitude" ;
  float lev(lev) ;
    lev:long_name = "pressure level" ;
    lev:units = "hPa" ;
  float lon(rlat,rlon) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(rlat,rlon) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
```

Example 5.17. A domain containing cell areas for a spherical geodesic grid.

```
dimensions:
  cell = 2562 ; // number of grid cells
  time = 12 ;
  nv = 6 ;      // maximum number of cell vertices

variables:
  char domain ;
    domain:dimensions = "time cell" ;
    domain:coordinates = "lon lat" ;
    domain:cell_measures = "area: cell_area" ;
    domain:long_name = "Domain with cell measures" ;
  float lon(cell) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
    lon:bounds = "lon_vertices" ;
  float lat(cell) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
    lat:bounds = "lat_vertices" ;
  float time(time) ;
    time:long_name = "time" ;
    time:units = "days since 1979-01-01" ;
  float cell_area(cell) ;
    cell_area:long_name = "area of grid cell" ;
    cell_area:standard_name = "cell_area" ;
    cell_area:units = "m2"
  float lon_vertices(cell, nv) ;
  float lat_vertices(cell, nv) ;
```

In this example the data variable **PS** from the [Cell areas for a spherical geodesic grid](#) example has been replaced by the domain variable **domain**.

Example 5.18. A domain with no explicit dimensions.

```
dimensions:

variables:
  char domain ;
    domain:dimensions = "" ;
    domain:coordinates = "t" ;
    domain:long_name = "Domain with no explicit dimensions" ;
  double t ;
    t:standard_name = "time" ;
    t:units = "days since 2021-01-01" ;
```

Example 5.19. A domain containing a timeseries geometry.

```
dimensions:
  instance = 2 ;
  node = 5 ;
  time = 4 ;

variables:
  char domain ;
    domain:dimensions = "instance time" ;
    domain:coordinates = "lat lon" ;
    domain:grid_mapping = "datum" ;
    domain:geometry = "geometry_container" ;
    domain:long_name = "Domain with a geometry variable" ;
  int time(time) ;
  double lat(instance) ;
    lat:units = "degrees_north" ;
    lat:standard_name = "latitude" ;
    lat:nodes = "y" ;
  double lon(instance) ;
    lon:units = "degrees_east" ;
    lon:standard_name = "longitude" ;
    lon:nodes = "x" ;
  int datum ;
    datum:grid_mapping_name = "latitude_longitude" ;
    datum:longitude_of_prime_meridian = 0.0 ;
    datum:semi_major_axis = 6378137.0 ;
    datum:inverse_flattening = 298.257223563 ;
  int geometry_container ;
    geometry_container:geometry_type = "line" ;
    geometry_container:node_count = "node_count" ;
    geometry_container:node_coordinates = "x y" ;
  int node_count(instance) ;
  double x(node) ;
    x:units = "degrees_east" ;
    x:standard_name = "longitude" ;
    x:axis = "X" ;
  double y(node) ;
    y:units = "degrees_north" ;
    y:standard_name = "latitude" ;
    y:axis = "Y" ;
```

In this example the data variable `someData` from the [Timeseries with geometry](#) example has been replaced by the domain variable `domain`.

Example 5.20. A domain containing a timeseries of station data in the indexed ragged array representation.

```
dimensions:
  station = 23 ;
  obs = UNLIMITED ;
  name_strlen = 23 ;

variables:
  char domain ;
    domain:dimensions = "obs" ;
    domain:coordinates = "time lat lon alt station_name" ;
    domain:long_name = "Domain with a discrete sampling geometry" ;
  float lon(station) ;
    lon:standard_name = "longitude" ;
    lon:long_name = "station longitude" ;
    lon:units = "degrees_east" ;
  float lat(station) ;
    lat:standard_name = "latitude" ;
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt(station) ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m" ;
    alt:positive = "up" ;
    alt:axis = "Z" ;
  char station_name(station, name_strlen) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id" ;
  int station_info(station) ;
    station_info:long_name = "some kind of station info" ;
  int stationIndex(obs) ;
    stationIndex:long_name = "which station this obs is for" ;
    stationIndex:instance_dimension = "station" ;
  double time(obs) ;
    time:standard_name = "time" ;
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;

attributes:
  :featureType = "timeSeries" ;
```

In this example the data variables **humidity** and **temp** from the [Timeseries of station data in the indexed ragged array representation](#). example have been replaced by the domain variable **domain**.

# Chapter 6. Labels and Alternative Coordinates

## 6.1. Labels

Character strings can be used to provide a name or label for each element of an axis. This is particularly useful for discrete axes (section 4.5). For instance, if a data variable contains time series of observational data from a number of observing stations, it may be convenient to provide the names of the stations as labels for the elements of the station dimension ([Section H.2, "Time Series Data"](#)). There are several other uses for labels in CF. For instance, [Northward heat transport in Atlantic Ocean](#) shows the use of labels to indicate geographic regions.

Character strings labelling the elements of an axis are regarded as string-valued auxiliary coordinate variables. The `coordinates` attribute of the data variable names the variable that contains the string array. An application processing the variables listed in the `coordinates` attribute can recognize a string-valued auxiliary coordinate variable because it has a type of `char` or `string`. If the variable has a type of `char`, the inner dimension (last dimension in CDL terms) is the maximum length of each string, and the other dimensions are axis dimensions. If an auxiliary coordinate variable has a type of `string` and has no dimensions, or has a type of `char` and has only one dimension (the maximum length of the string), it is a string-valued scalar coordinate variable (see [Section 5.7, "Scalar Coordinate Variables"](#)). As such, it has the same information content and can be used in the same contexts as a string-valued auxiliary coordinate variable of a size one dimension. This is a convenience feature.

### 6.1.1. Geographic Regions

When data is representative of geographic regions which can be identified by names but which have complex boundaries that cannot practically be specified using longitude and latitude boundary coordinates, a labeled axis should be used to identify the regions. We recommend that the names be chosen from the list of [standardized region names](#) whenever possible. To indicate that the label values are standardized the variable that contains the labels must be given the `standard_name` attribute with the value `region`.

### Example 6.1. Northward heat transport in Atlantic Ocean

Suppose we have data representing northward heat transport across a set of zonal slices in the Atlantic Ocean. Note that the standard names to describe this quantity do not include location information. That is provided by the latitude coordinate and the labeled axis:

```
dimensions:
  times = 20 ;
  lat = 5
  lbl = 1 ;
variables:
  float n_heat_transport(time,lat,lbl);
    n_heat_transport:units="W";
    n_heat_transport:coordinates="geo_region";
    n_heat_transport:standard_name="northward_ocean_heat_transport";
  double time(time) ;
    time:long_name = "time" ;
    time:units = "days since 1990-1-1 0:0:0" ;
  float lat(lat) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  string geo_region(lbl) ;
    geo_region:standard_name="region"
data:
  geo_region = "atlantic_ocean" ;
  lat = 10., 20., 30., 40., 50. ;
```

### 6.1.2. Taxon Names and Identifiers

A taxon is a named level within a biological classification, such as a class, genus and species. Quantities dependent on taxa have generic standard names containing the phrase "organisms\_in\_taxon", and the taxa are identified by auxiliary coordinate variables.

The taxon auxiliary coordinate variables are string-valued. The plain-language name of the taxon must be contained in a variable with **standard\_name** of **biological\_taxon\_name**. A Life Science Identifier (LSID) may be contained in a variable with **standard\_name** of **biological\_taxon\_lsid**. This is a URN with the syntax "urn:lsid:<Authority>:<Namespace>:<ObjectID>[:<Version>]". This includes the reference classification in the <Authority> element and these are restricted by the LSID governance. It is strongly recommended in CF that the authority chosen is World Register of Marine Species (WoRMS) for oceanographic data and Integrated Taxonomic Information System (ITIS) for freshwater and terrestrial data. WoRMS LSIDs are built from the WoRMS AphiaID taxon identifier such as "urn:lsid:marinespecies.org:taxname:104464" for AphiaID 104464. This may be converted to a URL by adding prefixes such as <http://www.lsid.info/>. ITIS LSIDs are built from the ITIS Taxonomic Serial Number (TSN), such as "urn:lsid:itis.gov:itis\_tsn:180543".

The **biological\_taxon\_name** auxiliary coordinate variable included for human readability is mandatory. The **biological\_taxon\_lsid** auxiliary coordinate variable included for software agent readability is optional, but strongly recommended. If both are present then each

**biological\_taxon\_name** coordinate must exactly match the name resolved from the **biological\_taxon\_lsid** coordinate. If LSIDs are available for some taxa in a dataset then the **biological\_taxon\_lsid** auxiliary coordinate variable should be included and missing data given for those taxa that do not have an identifier.

*Example 6.1.2. Taxon names and identifiers*

A skeleton example for taxonomic abundance time series.

```
dimension:
  time = 100 ;
  string80 = 80 ;
  taxon = 2 ;
variables:
  float time(time);
    time:standard_name = "time" ;
    time:units = "days since 2019-01-01" ;
  float abundance(time,taxon) ;
    abundance:standard_name =
"number_concentration_of_organisms_in_taxon_in_sea_water" ;
    abundance:coordinates = "taxon_lsid taxon_name" ;
  char taxon_name(taxon,string80) ;
    taxon_name:standard_name = "biological_taxon_name" ;
  char taxon_lsid(taxon,string80) ;
    taxon_lsid:standard_name = "biological_taxon_lsid" ;
data:
  time = // 100 values ;
  abundance = // 200 values ;
  taxon_name = "Calanus finmarchicus", "Calanus helgolandicus" ;
  taxon_lsid = "urn:lsid:marinespecies.org:taxname:104464",
"urn:lsid:marinespecies.org:taxname:104466" ;
```

## 6.2. Alternative Coordinates

In some situations a dimension may have alternative sets of coordinates values. Since there can only be one coordinate variable for the dimension (the variable with the same name as the dimension), any alternative sets of values have to be stored in auxiliary coordinate variables. For such alternative coordinate variables, there are no mandatory attributes, but they may have any of the attributes allowed for coordinate variables.

### Example 6.2. Model level numbers

Levels on a vertical axis may be described by both the physical coordinate and the ordinal model level number.

```
float xwind(sigma,lat);
  xwind:coordinates="model_level";
float sigma(sigma); // physical height coordinate
  sigma:long_name="sigma";
  sigma:positive="down";
int model_level(sigma); // model level number at each height
  model_level:long_name="model level number";
  model_level:positive="up";
```



# Chapter 7. Data Representative of Cells

When gridded data does not represent the point values of a field but instead represents some characteristic of the field within cells of finite "volume," a complete description of the variable should include metadata that describes the domain or extent of each cell, and the characteristic of the field that the cell values represent. It is possible for a single data value to be the result of an operation whose domain is a disjoint set of cells. This is true for many types of climatological averages, for example, the mean January temperature for the years 1970-2000. The methods that we present below for describing cells only provides an association of a grid point with a single cell, not with a collection of cells. However, climatological statistics are of such importance that we provide special methods for describing their associated computational domains in [Section 7.4, "Climatological Statistics"](#). For cases when data pertain to geospatial features with highly variable geometry node counts such as river lines or watershed boundaries, we provide `<<geometries>` as an alternative to bounds.

## 7.1. Cell Boundaries

To represent cells we add the attribute `bounds` to the appropriate coordinate variable(s). The value of `bounds` is the name of the variable that contains the vertices of the cell boundaries. We refer to this type of variable as a "boundary variable." *A boundary variable will have one more dimension than its associated coordinate or auxiliary coordinate variable.* The additional dimension should be the most rapidly varying one, and its size is the maximum number of cell vertices. Since a boundary variable is considered to be part of a coordinate variable's metadata, it is not necessary to provide it with attributes such as `long_name` and `units`.

Boundary variable attributes which determine the coordinate type (`units`, `standard_name`, `axis` and `positive`) or those which affect the interpretation of the array values (`units`, `calendar`, `leap_month`, `leap_year` and `month_lengths`) must always agree exactly with the same attributes of its associated coordinate, scalar coordinate or auxiliary coordinate variable. To avoid duplication, however, it is recommended that these are not provided to a boundary variable.

If a parametric coordinate variable with a `formula_terms` attribute (section 4.3.2) also has a `bounds` attribute, its boundary variable must have a `formula_terms` attribute too. In this case the same terms would appear in both (as specified in Appendix D), since the transformation from the parametric coordinate values to physical space is realized through the same formula. For any term that depends on the vertical dimension, however, the variable names appearing in the formula terms would differ from those found in the `formula_terms` attribute of the coordinate variable itself because the boundary variables for formula terms are two-dimensional while the formula terms themselves are one-dimensional.

Whenever a `formula_terms` attribute is attached to a boundary variable, the formula terms may additionally be identified using a second method: variables appearing in the vertical coordinates' `formula_terms` may be declared to be coordinate, scalar coordinate or auxiliary coordinate variables, and those coordinates may have `bounds` attributes that identify their boundary variables. In that case, the `bounds` attribute of a formula terms variable must be consistent with the `formula_terms` attribute of the boundary variable. Software digesting legacy datasets (constructed prior to version 1.7 of this standard) may have to rely in some cases on the first method of

identifying the formula term variables and in other cases, on the second. Starting from version 1.7, however, the first method will be sufficient.

*Example 7.1. Specifying `formula_terms` when a parametric coordinate variable has bounds.*

```
float eta(eta) ;
  eta:long_name = "eta at full levels" ;
  eta:positive = "down" ;
  eta:standard_name = "atmosphere_hybrid_sigma_pressure_coordinate" ;
  eta:formula_terms = "a: A b: B ps: PS p0: P0" ;
  eta:bounds="eta_bnds" ;
float eta_bnds(eta, 2) ;
  eta_bnds:formula_terms = "a: A_bnds b: B_bnds ps: PS p0: P0" ; // This
attribute is mandatory
float A(eta) ;
  A:long_name = "'a' coefficient for vertical coordinate at full levels" ;
  A:units = "Pa" ;
  A:bounds = "A_bnds" ; // This attribute is included for the optional second
method
float B(eta) ;
  B:long_name = "'b' coefficient for vertical coordinate at full levels" ;
  B:units = "1" ;
  B:bounds = "B_bnds" ; // This attribute is included for the optional second
method
float A_bnds(eta, 2) ;
float B_bnds(eta, 2) ;
float PS(lat, lon) ;
  PS:units = "Pa" ;
float P0 ;
  P0:units = "Pa" ;
float temp(eta, lat, lon) ;
  temp:standard_name = "air_temperature" ;
  temp:units = "K";
  temp:coordinates = "A B" ; // This attribute is included for the optional
second method
```

Note that the boundary variable for a set of  $N$  contiguous intervals is an array of shape  $(N,2)$ . Although in this case there will be a duplication of the boundary coordinates between adjacent intervals, this representation has the advantage that it is general enough to handle, without modification, non-contiguous intervals, as well as intervals on an axis using the unlimited dimension.

Applications that process cell boundary data often times need to determine whether or not adjacent cells share an edge. In order to facilitate this type of processing the following restrictions are placed on the data in boundary variables.

### **Bounds for 1-D coordinate variables**

For a coordinate variable such as `lat(lat)` with associated boundary variable `latbnd(x,2)`, the

interval endpoints must be ordered consistently with the associated coordinate, e.g., for an increasing coordinate,  $\text{lat}(1) > \text{lat}(0)$  implies  $\text{latbnd}(i,1) \geq \text{latbnd}(i,0)$  for all  $i$  (figure 1).

If adjacent intervals are contiguous, the shared endpoint must be represented indentially in each instance where it occurs in the boundary variable. For example, if the intervals that contain grid points  $\text{lat}(i)$  and  $\text{lat}(i+1)$  are contiguous, then  $\text{latbnd}(i+1,0) = \text{latbnd}(i,1)$ .

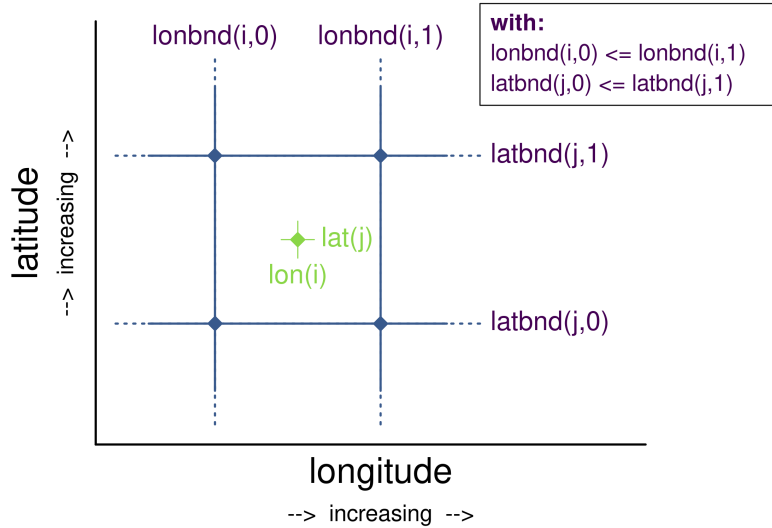


Figure 1. Order of  $\text{lonbnd}(i,0)$  and  $\text{lonbnd}(i,1)$  as well as of  $\text{latbnd}(i,0)$  and  $\text{latbnd}(i,1)$  in the case of one-dimensional horizontal coordinate axes. Tuples  $(\text{lon}(i), \text{lat}(j))$  represent grid cell centers. The four grid cell vertices are given by  $(\text{lonbnd}(i,0), \text{latbnd}(j,0))$ ,  $(\text{lonbnd}(i,1), \text{latbnd}(j,0))$ ,  $(\text{lonbnd}(i,1), \text{latbnd}(j,1))$  and  $(\text{lonbnd}(i,0), \text{latbnd}(j,1))$ .

### Bounds for 2-D coordinate variables with 4-sided cells

In the case where the horizontal grid is described by two-dimensional auxiliary coordinate variables in latitude  $\text{lat}(n,m)$  and longitude  $\text{lon}(n,m)$ , and the associated cells are four-sided, then the boundary variables are given in the form  $\text{latbnd}(n,m,4)$  and  $\text{lonbnd}(n,m,4)$ , where the trailing index runs over the four vertices of the cells. Let us call the side of cell  $(j,i)$  facing cell  $(j,i-1)$  the "i-1" side, the side facing cell  $(j,i+1)$  the "i+1" side, and similarly for "j-1" and "j+1". Then we can refer to the vertex formed by sides i-1 and j-1 as  $(j-1,i-1)$ . With this notation, the four vertices are indexed as follows:  $0=(j-1,i-1)$ ,  $1=(j-1,i+1)$ ,  $2=(j+1,i+1)$ ,  $3=(j+1,i-1)$ .

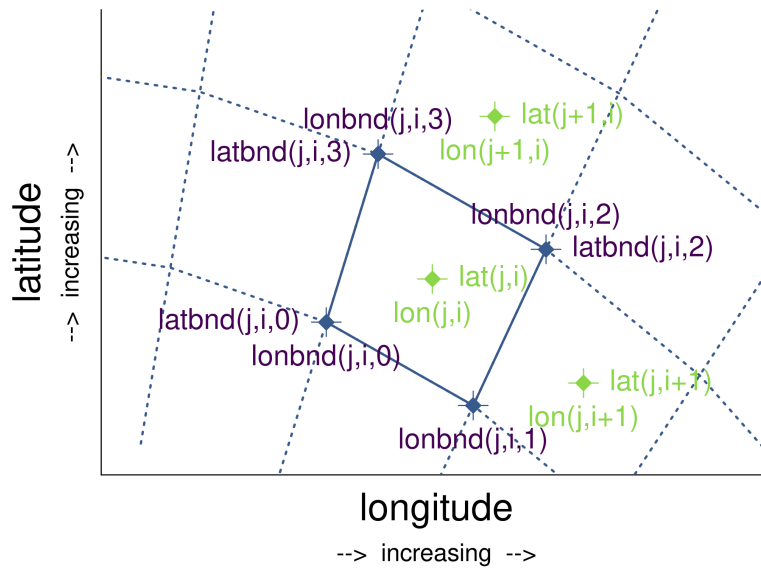


Figure 2. Order of  $\text{lonbnd}(j, i, 0)$  to  $\text{lonbnd}(j, i, 3)$  and of  $\text{latbnd}(j, i, 0)$  and  $\text{latbnd}(j, i, 3)$  in the case of two-dimensional horizontal coordinate axes. Tuples  $(\text{lon}(j, i), \text{lat}(j, i))$  represent grid cell centers and tuples  $(\text{lonbnd}(j, i, n), \text{latbnd}(j, i, n))$  represent the grid cell vertices.

If i-j-upward is a right-handed coordinate system (like lon-lat-upward), this ordering means the vertices will be traversed anticlockwise on the lon-lat surface seen from above (figure 2). If i-j-upward is left-handed, they will be traversed clockwise on the lon-lat surface.

The bounds can be used to decide whether cells are contiguous via the following relationships. In these equations the variable **bnd** is used generically to represent either the latitude or longitude boundary variable.

For  $0 < j < n$  and  $0 < i < m$ ,  
 If cells  $(j, i)$  and  $(j, i+1)$  are contiguous, then  
 $\text{bnd}(j, i, 1) = \text{bnd}(j, i+1, 0)$   
 $\text{bnd}(j, i, 2) = \text{bnd}(j, i+1, 3)$   
 If cells  $(j, i)$  and  $(j+1, i)$  are contiguous, then  
 $\text{bnd}(j, i, 3) = \text{bnd}(j+1, i, 0)$  and  $\text{bnd}(j, i, 2) = \text{bnd}(j+1, i, 1)$

### Bounds for multi-dimensional coordinate variables with p-sided cells

In all other cases, the bounds should be dimensioned  $(\dots, n, p)$ , where  $(\dots, n)$  are the dimensions of the auxiliary coordinate variables, and **p** the number of vertices of the cells. The vertices must be traversed anticlockwise in the lon-lat plane as viewed from above. The starting vertex is not specified.

### Example 7.2. Cells on a latitude axis

```
dimensions:
  lat = 64;
  nv = 2;    // number of vertices
variables:
  float lat(lat);
  lat:long_name = "latitude";
  lat:units = "degrees_north";
  lat:bounds = "lat_bnds";
  float lat_bnds(lat,nv);
```

The boundary variable `lat_bnds` associates a latitude gridpoint `i` with the interval whose boundaries are `lat_bnds(i,0)` and `lat_bnds(i,1)`. The gridpoint location, `lat(i)`, should be contained within this interval.

For rectangular grids, two-dimensional cells can be expressed as Cartesian products of one-dimensional cells of the type in the preceding example. However for non-rectangular grids a "rectangular" cell will in general require specifying all four vertices for each cell.

### Example 7.3. Cells in a non-rectangular grid

```
dimensions:
  imax = 128;
  jmax = 64;
  nv = 4;
variables:
  float lat(jmax,imax);
  lat:long_name = "latitude";
  lat:units = "degrees_north";
  lat:bounds = "lat_bnds";
  float lon(jmax,imax);
  lon:long_name = "longitude";
  lon:units = "degrees_east";
  lon:bounds = "lon_bnds";
  float lat_bnds(jmax,imax,nv);
  float lon_bnds(jmax,imax,nv);
```

The boundary variables `lat_bnds` and `lon_bnds` associate a gridpoint `(j,i)` with the cell determined by the vertices `(lat_bnds(j,i,n),lon_bnds(j,i,n))`, `n=0,..,3`. The gridpoint location, `(lat(j,i),lon(j,i))`, should be contained within this region.

## 7.2. Cell Measures

For some calculations, information is needed about the size, shape or location of the cells that cannot be deduced from the coordinates and bounds without special knowledge that a generic

application cannot be expected to have. For instance, in computing the mean of several cell values, it is often appropriate to "weight" the values by area. When computing an area-mean each grid cell value is multiplied by the grid-cell area before summing, and then the sum is divided by the sum of the grid-cell areas. Area weights may also be needed to map data from one grid to another in such a way as to preserve the area mean of the field. The preservation of area-mean values while regridding may be essential, for example, when calculating surface heat fluxes in an atmospheric model with a grid that differs from the ocean model grid to which it is coupled.

In many cases the areas can be calculated from the cell bounds, but there are exceptions. Consider, for example, a spherical geodesic grid composed of contiguous, roughly hexagonal cells. The vertices of the cells can be stored in the variable identified by the **bounds** attribute, but the cell perimeter is not uniquely defined by its vertices (because the vertices could, for example, be connected by straight lines, or, on a sphere, by lines following a great circle, or, in general, in some other way). Thus, given the cell vertices alone, it is generally impossible to calculate the area of a grid cell. This is why it may be necessary to store the grid-cell areas in addition to the cell vertices.

In other cases, the grid cell-volume might be needed and might not be easily calculated from the coordinate information. In ocean models, for example, it is not uncommon to find "partial" grid cells at the bottom of the ocean. In this case, rather than (or in addition to) indicating grid cell area, it may be necessary to indicate volume.

To indicate extra information about the spatial properties of a variable's grid cells, a **cell\_measures** attribute may be defined for a variable. This is a string attribute comprising a list of blank-separated pairs of words of the form "**measure: name**". For the moment, "**area**" and "**volume**" are the only defined measures, but others may be supported in future. The "name" is the name of the variable containing the measure values, which we refer to as a "measure variable". The dimensions of the measure variable should be the same as or a subset of the dimensions of the variable to which they are related, but their order is not restricted. In the case of area, for example, the field itself might be a function of longitude, latitude, and time, but the variable containing the area values would only include longitude and latitude dimensions (and the dimension order could be reversed, although this is not recommended). The variable must have a **units** attribute and may have other attributes such as a **standard\_name**.

For rectangular longitude-latitude grids, the area of grid cells can be calculated from the bounds: the area of a cell is proportional to the product of the difference in the longitude bounds of the cell and the difference between the sine of each latitude bound of the cell. In this case supplying grid-cell areas via the **cell\_measures** attribute is unnecessary because it may be assumed that applications can perform this calculation, using their own value for the radius of the Earth.

A variable referenced by **cell\_measures** is not required to be present in the file containing the data variable. If the **cell\_measures** variable is located in another file (an "external file"), rather than in the file where it is referenced, it must be listed in the **external\_variables** attribute of the referencing file (Section 2.6.3).

```
dimensions:
  cell = 2562 ; // number of grid cells
  time = 12 ;
  nv = 6 ;      // maximum number of cell vertices
variables:
  float PS(time,cell) ;
    PS:units = "Pa" ;
    PS:coordinates = "lon lat" ;
    PS:cell_measures = "area: cell_area" ;
  float lon(cell) ;
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
    lon:bounds="lon_vertices" ;
  float lat(cell) ;
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
    lat:bounds="lat_vertices" ;
  float time(time) ;
    time:long_name = "time" ;
    time:units = "days since 1979-01-01 0:0:0" ;
  float cell_area(cell) ;
    cell_area:long_name = "area of grid cell" ;
    cell_area:standard_name="cell_area";
    cell_area:units = "m2"
  float lon_vertices(cell,nv) ;
  float lat_vertices(cell,nv) ;
```

## 7.3. Cell Methods

To describe the characteristic of a field that is represented by cell values, we define the **cell\_methods** attribute of the variable. This is a string attribute comprising a list of blank-separated words of the form "*name: method*". Each "*name: method*" pair indicates that for an axis identified by *name*, the cell values representing the field have been determined or derived by the specified *method*. For example, if data values have been generated by computing time means, then this could be indicated with **cell\_methods="t: mean"**, assuming here that the name of the time dimension variable is "t".

In the specification of this attribute, *name* can be a dimension of the variable, a scalar coordinate variable, a valid standard name, or the word "**area**". (See [Section 7.3.4, "Cell methods when there are no coordinates"](#) concerning the use of standard names in cell\_methods.) The values of *method* should be selected from the list in [Appendix E, Cell Methods](#), which includes **point**, **sum**, **mean**, among others. Case is not significant in the method name. Some methods (e.g., **variance**) imply a change of units of the variable, as is indicated in [Appendix E, Cell Methods](#).

It must be remembered that the method applies only to the axis designated in **cell\_methods** by *name*, and different methods may apply to other axes. If, for instance, a precipitation value in a

longitude-latitude cell is given the method **maximum** for these axes, it means that it is the maximum within these spatial cells, and does not imply that it is also the maximum in time. Furthermore, it should be noted that if any *method* other than "**point**" is specified for a given axis, then **bounds** should also be provided for that axis (except for the relatively rare exceptions described in [Section 7.3.4, "Cell methods when there are no coordinates"](#)).

The default interpretation for variables that do not have the **cell\_methods** attribute specified depends on whether the quantity is extensive (which depends on the size of the cell) or intensive (which does not). Suppose, for example, the quantities "accumulated precipitation" and "precipitation rate" each have a time axis. A variable representing accumulated precipitation is extensive in time because it depends on the length of the time interval over which it is accumulated. For correct interpretation, it therefore requires a time interval to be completely specified via a boundary variable (i.e., via a **bounds** attribute for the time axis). In this case the default interpretation is that the cell method is a sum over the specified time interval. This can be (optionally) indicated explicitly by setting the cell method to **sum**. A precipitation rate on the other hand is intensive in time and could equally well represent either an instantaneous value or a mean value over the time interval specified by the cell. In this case the default interpretation for the quantity would be "instantaneous" (which, optionally, can be indicated explicitly by setting the cell method to **point**). More often, however, cell values for intensive quantities are means, and this should be indicated explicitly by setting the cell method to **mean** and specifying the cell bounds.

Because the default interpretation for an intensive quantity differs from that of an extensive quantity and because this distinction may not be understood by some users of the data, it is recommended that every data variable include for each of its dimensions and each of its scalar coordinate variables the **cell\_methods** information of interest (unless this information would not be meaningful). It is especially recommended that **cell\_methods** be explicitly specified for each spatio-temporal dimension and each spatio-temporal scalar coordinate variable.



### Example 7.5. Methods applied to a timeseries

Consider 12-hourly timeseries of pressure, temperature and precipitation from a number of stations, where pressure is measured instantaneously, maximum temperature for the preceding 12 hours is recorded, and precipitation is accumulated in a rain gauge. For a period of 48 hours from 6 a.m. on 19 April 1998, the data is structured as follows:

```
dimensions:
  time = UNLIMITED; // (5 currently)
  station = 10;
  nv = 2;
variables:
  float pressure(time,station);
    pressure:long_name = "pressure";
    pressure:units = "kPa";
    pressure:cell_methods = "time: point";
  float maxtemp(time,station);
    maxtemp:long_name = "temperature";
    maxtemp:units = "K";
    maxtemp:cell_methods = "time: maximum";
  float ppn(time,station);
    ppn:long_name = "depth of water-equivalent precipitation";
    ppn:units = "mm";
    ppn:cell_methods = "time: sum";
  double time(time);
    time:long_name = "time";
    time:units = "h since 1998-4-19 6:0:0";
    time:bounds = "time_bnds";
  double time_bnds(time,nv);
data:
  time = 0., 12., 24., 36., 48.;
  time_bnds = -12.,0., 0.,12., 12.,24., 24.,36., 36.,48.;
```

Note that in this example the time axis values coincide with the end of each interval. It is sometimes desirable, however, to use the midpoint of intervals as coordinate values for variables that are representative of an interval. An application may simply obtain the midpoint values by making use of the boundary data in `time_bnds`.

#### 7.3.1. Statistics for more than one axis

If more than one cell method is to be indicated, they should be arranged in the order they were applied. The left-most operation is assumed to have been applied first. Suppose, for example, that within each grid cell a quantity varies in both longitude and time and that these dimensions are named "lon" and "time", respectively. Then values representing the time-average of the zonal maximum are labeled `cell_methods="lon: maximum time: mean"` (i.e. find the largest value at each instant of time over all longitudes, then average these maxima over time); values of the zonal maximum of time-averages are labeled `cell_methods="time: mean lon: maximum"`. If the methods could have been applied in any order without affecting the outcome, they may be put in any order

in the `cell_methods` attribute.

If a data value is representative of variation over a combination of axes, a single method should be prefixed by the names of all the dimensions involved (listed in any order, since in this case the order must be immaterial). Dimensions should be grouped in this way only if there is an essential difference from treating the dimensions individually. For instance, the standard deviation of topographic height within a longitude-latitude gridbox could have `cell_methods="lat: lon: standard_deviation"`. (Note also, that in accordance with the recommendation of the following paragraph, this could be equivalently and preferably indicated by `cell_methods="area: standard_deviation"`.) This is not the same as `cell_methods="lon: standard_deviation lat: standard_deviation"`, which would mean finding the standard deviation along each parallel of latitude within the zonal extent of the gridbox, and then the standard deviation of these values over latitude.

To indicate variation over horizontal area, it is recommended that instead of specifying the combination of horizontal dimensions, the special string "area" be used. The common case of an area-mean can thus be indicated by `cell_methods="area: mean"` (rather than, for example, "lon: lat: mean"). The horizontal coordinate variables to which "area" refers are in this case not explicitly indicated in `cell_methods` but can be identified, if necessary, from attributes attached to the coordinate variables, scalar coordinate variables, or auxiliary coordinate variables, as described in [Chapter 4, Coordinate Types](#).

### 7.3.2. Recording the spacing of the original data and other information

To indicate more precisely how the cell method was applied, extra information may be included in parentheses () after the identification of the method. This information includes standardized and non-standardized parts. Currently the only standardized information is to provide the typical interval between the original data values to which the method was applied, in the situation where the present data values are statistically representative of original data values which had a finer spacing. The syntax is (`interval: value unit`), where *value* is a numerical value and *unit* is a string that can be recognized by UNIDATA's Udunits package [[UDUNITS](#)]. The *unit* will usually be dimensionally equivalent to the unit of the corresponding dimension, but this is not required (which allows, for example, the interval for a standard deviation calculated from points evenly spaced in distance along a parallel to be reported in units of length even if the zonal coordinate of the cells is given in degrees). Recording the original interval is particularly important for standard deviations. For example, the standard deviation of daily values could be indicated by `cell_methods="time: standard_deviation (interval: 1 day)"` and of annual values by `cell_methods="time: standard_deviation (interval: 1 year)"`.

If the cell method applies to a combination of axes, they may have a common original interval e.g. `cell_methods="lat: lon: standard_deviation (interval: 10 km)"`. Alternatively, they may have separate intervals, which are matched to the names of axes by position e.g. `cell_methods="lat: lon: standard_deviation (interval: 0.1 degree_N interval: 0.2 degree_E)"`, in which 0.1 degree applies to latitude and 0.2 degree to longitude.

If there is both standardized and non-standardized information, the non-standardized follows the standardized information and the keyword `comment:`. If there is no standardized information, the keyword `comment:` should be omitted. For instance, an area-weighted mean over latitude could be indicated as `lat: mean (area-weighted)` or `lat: mean (interval: 1 degree_north comment: area-`

weighted).

A dimension of size one may be the result of "collapsing" an axis by some statistical operation, for instance by calculating a variance from time series data. We strongly recommend that dimensions of size one be retained (or scalar coordinate variables be defined) to enable documentation of the method (through the `cell_methods` attribute) and its domain (through the `bounds` attribute).

#### Example 7.6. Surface air temperature variance

The variance of the diurnal cycle on 1 January 1990 has been calculated from hourly instantaneous surface air temperature measurements. The time dimension of size one has been retained.

```
dimensions:
  lat=90;
  lon=180;
  time=1;
  nv=2;
variables:
  float TS_var(time,lat,lon);
    TS_var:long_name="surface air temperature variance"
    TS_var:units="K2";
    TS_var:cell_methods="time: variance (interval: 1 hr comment: sampled
instantaneously)";
  float time(time);
    time:units="days since 1990-01-01 00:00:00";
    time:bounds="time_bnds";
  float time_bnds(time,nv);
data:
  time=.5;
  time_bnds=0.,1.;
```

Notice that a parenthesized comment in the `cell_methods` attribute provides the nature of the samples used to calculate the variance.

### 7.3.3. Statistics applying to portions of cells

By default, the statistical method indicated by `cell_methods` is assumed to have been evaluated over the entire horizontal area of the cell. Sometimes, however, it is useful to limit consideration to only a portion of a cell (e.g. a mean over the sea-ice area). To indicate this, one of two conventions may be used.

The first convention is a method that can be used for the common case of a single area-type. In this case, the `cell_methods` attribute may include a string of the form "*name: method where type*". Here *name* could, for example, be `area` and *type* may be any of the strings permitted for a variable with a `standard_name` of `area_type`. As an example, if the method were `mean` and the `area_type` were `sea_ice`, then the data would represent a mean over only the sea ice portion of the grid cell. If the data writer expects *type* to be interpreted as one of the standard `area_type` strings, then none of the

variables in the netCDF file should be given a name identical to that of the string (because the second convention, described in the next paragraph, takes precedence).

The second convention is the more general. In this case, the `cell_methods` entry is of the form "*name: method where typevar*". Here *typevar* is a string-valued auxiliary coordinate variable or string-valued scalar coordinate variable (see Section 6.1, "Labels") with a `standard_name` of `area_type`. The variable *typevar* contains the name(s) of the selected portion(s) of the grid cell to which the *method* is applied. This convention can accommodate cases in which a method is applied to more than one area type and the result is stored in a single data variable (with a dimension which ranges across the various area types). It provides a convenient way to store output from land surface models, for example, since they deal with many area types within each surface gridbox (e.g., `vegetation`, `bare_ground`, `snow`, etc.).

*Example 7.7. Mean surface temperature over land and sensible heat flux averaged separately over land and sea.*

```
dimensions:
  lat=73;
  lon=96;
  maxlen=20;
  ls=2;
variables:
  float surface_temperature(lat,lon);
    surface_temperature:cell_methods="area: mean where land";
  float surface_upward_sensible_heat_flux(ls,lat,lon);
    surface_upward_sensible_heat_flux:coordinates="land_sea";
    surface_upward_sensible_heat_flux:cell_methods="area: mean where land_sea";
  char land_sea(ls,maxlen);
    land_sea:standard_name="area_type";
data:
  land_sea="land", "sea";
```

If the *method* is `mean`, various ways of calculating the mean can be distinguished in the `cell_methods` attribute with a string of the form "mean where *type1* [over *type2*]". Here, *type1* can be any of the possibilities allowed for *typevar* or *type* (as specified in the two paragraphs preceding above Example). The same options apply to *type2*, except it is not allowed to be the name of an auxiliary coordinate variable with a dimension greater than one (ignoring the possible dimension accommodating the maximum string length). A `cell_methods` attribute with a string of the form "mean where *type1* over *type2*" indicates the mean is calculated by summing over the *type1* portion of the cell and dividing by the area of the *type2* portion. In particular, a `cell_methods` string of the form "mean where `all_area_types` over *type2*" indicates the mean is calculated by summing over all types of area within the cell and dividing by the area of the *type2* portion. (Note that `all_area_types` is one of the valid strings permitted for a variable with the `standard_name` `area_type`.) If "over *type2*" is omitted, the mean is calculated by summing over the *type1* portion of the cell and dividing by the area of this portion.

Example 7.8. Thickness of sea-ice and snow on sea-ice averaged over sea area.

```
variables:
  float sea_ice_thickness(lat,lon);
    sea_ice_thickness:cell_methods="area: mean where sea_ice over sea";
    sea_ice_thickness:standard_name="sea_ice_thickness";
    sea_ice_thickness:units="m";
  float snow_thickness(lat,lon);
    snow_thickness:cell_methods="area: mean where sea_ice over sea";
    snow_thickness:standard_name="lwe_thickness_of_surface_snow_amount";
    snow_thickness:units="m";
```

In the case of sea-ice thickness, the phrase “where sea\_ice” could be replaced by “where all\_area\_types” without changing the meaning since the integral of sea-ice thickness over all area types is obviously the same as the integral over the sea-ice area only. In the case of snow thickness, “where sea\_ice” differs from “where all\_area\_types” because “where sea\_ice” excludes snow on land from the average.

### 7.3.4. Cell methods when there are no coordinates

To provide an indication that a particular cell method is relevant to the data without having to provide a precise description of the corresponding cell, the *name* that appears in a *name: method* pair may be an appropriate **standard\_name** (which identifies the dimension) or the string, *area* (rather than the name of a scalar coordinate variable or a dimension with a coordinate variable). This convention cannot be used, however, if the name of a dimension or scalar coordinate variable is identical to *name*. There are two situations where this convention is useful.

First, it allows one to provide some indication of the method when the cell coordinate range cannot be precisely defined. For example, a climatological mean might be based on any data that exists, and, in general, the data might not be available over the same time periods everywhere. In this case, the time range would not be well defined (because it would vary, depending on location), and it could not be precisely specified through a time dimension’s bounds. Nevertheless, useful information can be conveyed by a **cell\_methods** entry of **time: mean** (where **time**, it should be noted, is a valid **standard\_name**). (As required by this convention, it is assumed here that for the data referred to by this **cell\_methods** attribute, “time” is not a dimension or coordinate variable.)

Second, for a few special dimensions, this convention allows one to indicate (without explicitly defining the coordinates) that the method applies to the domain covering the entire permitted range of those dimensions. This is allowed only for longitude, latitude, and area (indicating a combination of horizontal coordinates). For longitude, the domain is indicated according to this provision by the string “longitude” (rather than the name of a longitude coordinate variable), and this implies that the method applies to all possible longitudes (i.e., from 0E to 360E). For latitude, the string “latitude” is used and implies the method applies to all possible latitudes (i.e., from 90S to 90N). For area, the string “area” is used and implies the method applies to the whole world.

In the second case if, in addition, the data variable has a dimension with a corresponding labeled axis that specifies a geographic region ([Section 6.1.1, “Geographic Regions”](#)), the implied range of

longitude and latitude is the valid range for each specified region, or in the case of **area** the domain is the geographic region. For example, there could be a **cell\_methods** entry of "**longitude: mean**", where **longitude** is *not* the name of a dimension or coordinate variable (but is one of the special cases given above). That would indicate a mean over all longitudes. Note, however, that if in addition the data variable had a scalar coordinate variable with a **standard\_name** of **region** and a value of **atlantic\_ocean**, it would indicate a mean over longitudes that lie within the Atlantic Ocean, not all longitudes.

We recommend that whenever possible, cell bounds should be supplied by giving the variable a dimension of size one and attaching bounds to the associated coordinate variable.

## 7.4. Climatological Statistics

Climatological statistics may be derived from corresponding portions of the annual cycle in a set of years, e.g., the average January temperatures in the climatology of 1961-1990, where the values are derived by averaging the 30 Januarys from the separate years. Portions of the climatological cycle are specified by references to dates within the calendar year. However, a calendar year is not a well-defined unit of time, because it differs between leap years and other years, and among calendars. Nonetheless for practical purposes we wish to compare statistics for months or seasons from different calendars, and to make climatologies from a mixture of leap years and other years. Hence we provide special conventions for indicating dates within the climatological year. Climatological statistics may also be derived from corresponding portions of a range of days, for instance the average temperature for each hour of the average day in April 1997. In addition the two concepts may be used at once, for instance to indicate not April 1997, but the average April of the five years 1995-1999.

Climatological variables have a climatological time axis. Like an ordinary time axis, a climatological time axis may have a dimension of unity (for example, a variable containing the January average temperatures for 1961-1990), but often it will have several elements (for example, a climatological time axis with a dimension of 12 for the climatological average temperatures in each month for 1961-1990, a dimension of 3 for the January mean temperatures for the three decades 1961-1970, 1971-1980, 1981-1990, or a dimension of 24 for the hours of an average day). Intervals of climatological time are conceptually different from ordinary time intervals; a given interval of climatological time represents a set of subintervals which are not necessarily contiguous. To indicate this difference, a climatological time coordinate variable does not have a **bounds** attribute. Instead, it has a **climatology** attribute, which names a variable with dimensions (n,2), n being the dimension of the climatological time axis. Using the units and calendar of the time coordinate variable, element (i,0) of the climatology variable specifies the beginning of the first subinterval and element (i,1) the end of the last subinterval used to evaluate the climatological statistics with index i in the time dimension. The time coordinates should be values that are representative of the climatological time intervals, such that an application which does not recognise climatological time will nonetheless be able to make a reasonable interpretation.

The COARDS standard offers limited support for climatological time. For compatibility with COARDS, time coordinates should also be recognised as climatological if they have a **units** attribute of time-units relative to midnight on 1 January in year 0 i.e. **since 0-1-1** in udunits syntax, and provided they refer to the real-world calendar. We do not recommend this convention because (a) it does not provide any information about the intervals used to compute the climatology, and (b)



there is no standard for how dates since year 1 will be encoded with units having a reference time in year 0, since this year does not exist; consequently there may be inconsistencies among software packages in the interpretation of the time coordinates. Year 0 may be a valid year in non-real-world calendars, and therefore cannot be used to signal climatological time in such cases.

A climatological axis may use different statistical methods to represent variation among years, within years and within days. For example, the average January temperature in a climatology is obtained by averaging both within years and over years. This is different from the average January-maximum temperature and the maximum January-average temperature. For the former, we first calculate the maximum temperature in each January, then average these maxima; for the latter, we first calculate the average temperature in each January, then find the largest one. As usual, the statistical operations are recorded in the `cell_methods` attribute, which may have two or three entries for the climatological time dimension.

Valid values of the `cell_methods` attribute must be in one of the forms from the following list. The intervals over which various statistical methods are applied are determined by decomposing the date and time specifications of the climatological time bounds of a cell, as recorded in the variable named by the `climatology` attribute. (The date and time specifications must be calculated from the time coordinates expressed in units of "time interval since reference date and time".) In the descriptions that follow we use the abbreviations *y*, *m*, *d*, *H*, *M*, and *S* for year, month, day, hour, minute, and second respectively. The suffix *0* indicates the earlier bound and *1* the latter.

**time: method1 within years time: method2 over years**

*method1* is applied to the time intervals (mdHMS0-mdHMS1) within individual years and *method2* is applied over the range of years (y0-y1).

**time: method1 within days time: method2 over days**

*method1* is applied to the time intervals (HMS0-HMS1) within individual days and *method2* is applied over the days in the interval (ymd0-ymd1).

**time: method1 within days time: method2 over days time: method3 over years**

*method1* is applied to the time intervals (HMS0-HMS1) within individual days and *method2* is applied over the days in the interval (md0-md1), and *method3* is applied over the range of years (y0-y1).

The methods which can be specified are those listed in [Appendix E, Cell Methods](#) and each entry in the `cell_methods` attribute may also, as usual, contain non-standardised information in parentheses after the method. For instance, a mean over ENSO years might be indicated by "**time: mean over years (ENSO years)**".

When considering intervals within years, if the earlier climatological time bound is later in the year than the later climatological time bound, it implies that the time intervals for the individual years run from each year across January 1 into the next year e.g. DJF intervals run from December 1 0:00 to March 1 0:00. Analogous situations arise for daily intervals running across midnight from one day to the next.

When considering intervals within days, if the earlier time of day is equal to the later time of day, then the method is applied to a full 24 hour day.

We have tried to make the examples in this section easier to understand by translating all time coordinate values to date and time formats. This is not currently valid CDL syntax.

*Example 7.9. Climatological seasons*

This example shows the metadata for the average seasonal-minimum temperature for the four standard climatological seasons MAM JJA SON DJF, made from data for March 1960 to February 1991.

```
dimensions:
  time=4;
  nv=2;
variables:
  float temperature(time,lat,lon);
    temperature:long_name="surface air temperature";
    temperature:cell_methods="time: minimum within years time: mean over years";
    temperature:units="K";
  double time(time);
    time:climatology="climatology_bounds";
    time:units="days since 1960-1-1";
  double climatology_bounds(time,nv);
data: // time coordinates translated to date/time format
  time="1960-4-16", "1960-7-16", "1960-10-16", "1961-1-16" ;
  climatology_bounds="1960-3-1", "1990-6-1",
                    "1960-6-1", "1990-9-1",
                    "1960-9-1", "1990-12-1",
                    "1960-12-1", "1991-3-1" ;
```



*Example 7.10. Decadal averages for January*

Average January precipitation totals are given for each of the decades 1961-1970, 1971-1980, 1981-1990.

```
dimensions:
  time=3;
  nv=2;
variables:
  float precipitation(time,lat,lon);
    precipitation:long_name="precipitation amount";
    precipitation:cell_methods="time: sum within years time: mean over years";
    precipitation:units="kg m-2";
  double time(time);
    time:climatology="climatology_bounds";
    time:units="days since 1901-1-1";
  double climatology_bounds(time,nv);
data: // time coordinates translated to date/time format
  time="1965-1-15", "1975-1-15", "1985-1-15" ;
  climatology_bounds="1961-1-1", "1970-2-1",
                    "1971-1-1", "1980-2-1",
                    "1981-1-1", "1990-2-1" ;
```

*Example 7.11. Temperature for each hour of the average day*

Hourly average temperatures are given for April 1997.

```
dimensions:
  time=24;
  nv=2;
variables:
  float temperature(time,lat,lon);
    temperature:long_name="surface air temperature";
    temperature:cell_methods="time: mean within days time: mean over days";
    temperature:units="K";
  double time(time);
    time:climatology="climatology_bounds";
    time:units="hours since 1997-4-1";
  double climatology_bounds(time,nv);
data: // time coordinates translated to date/time format
  time="1997-4-1 0:30", "1997-4-1 1:30", ... "1997-4-1 23:30" ;
  climatology_bounds="1997-4-1 0:00", "1997-4-30 1:00",
                    "1997-4-1 1:00", "1997-4-30 2:00",
                    ...
                    "1997-4-1 23:00", "1997-5-1 0:00" ;
```

*Example 7.12. Extreme statistics and spell-lengths*

Number of frost days during NH winter 2007-2008, and maximum length of spells of consecutive frost days. A "frost day" is defined as one during which the minimum temperature falls below freezing point (0 degC). This is described as a climatological statistic, in which the minimum temperature is first calculated within each day, and then the number of days or spell lengths meeting the specified condition are evaluated. In this operation, the standard name is also changed; the original data are `air_temperature`.

```
variables:
  float n1(lat,lon);
    n1:standard_name="number_of_days_with_air_temperature_below_threshold";
    n1:coordinates="threshold time";
    n1:cell_methods="time: minimum within days time: sum over days";
  float n2(lat,lon);
    n2:standard_name="spell_length_of_days_with_air_temperature_below_threshold";
    n2:coordinates="threshold time";
    n2:cell_methods="time: minimum within days time: maximum over days";
  float threshold;
    threshold:standard_name="air_temperature";
    threshold:units="degC";
  double time;
    time:climatology="climatology_bounds";
    time:units="days since 2000-6-1";
  double climatology_bounds(time,nv);
data: // time coordinates translated to date/time format
  time="2008-1-16 6:00";
  climatology_bounds="2007-12-1 6:00", "2000-8-2 6:00";
  threshold=0.;
```

*Example 7.13. Temperature for each hour of the typical climatological day*

This is a modified version of the previous example, "Temperature for each hour of the average day". It now applies to April from a 1961-1990 climatology.

```
variables:
  float temperature(time,lat,lon);
    temperature:long_name="surface air temperature";
    temperature:cell_methods="time: mean within days ",
      "time: mean over days time: mean over years";
    temperature:units="K";
  double time(time);
    time:climatology="climatology_bounds";
    time:units="days since 1961-1-1";
  double climatology_bounds(time,nv);
data: // time coordinates translated to date/time format
time="1961-4-1 0:30", "1961-4-1 1:30", ..., "1961-4-1 23:30" ;
climatology_bounds="1961-4-1 0:00", "1990-4-30 1:00",
  "1961-4-1 1:00", "1990-4-30 2:00",
  ...
  "1961-4-1 23:00", "1990-5-1 0:00" ;
```

*Example 7.14. Monthly-maximum daily precipitation totals*

Maximum of daily precipitation amounts for each of the three months June, July and August 2000 are given. The first daily total applies to 6 a.m. on 1 June to 6 a.m. on 2 June, the 30th from 6 a.m. on 30 June to 6 a.m. on 1 July. The maximum of these 30 values is stored under time index 0 in the precipitation array.

```
dimensions:
  time=3;
  nv=2;
variables:
  float precipitation(time,lat,lon);
    precipitation:long_name="Accumulated precipitation";
    precipitation:cell_methods="time: sum within days time: maximum over days";
    precipitation:units="kg";
  double time(time);
    time:climatology="climatology_bounds";
    time:units="days since 2000-6-1";
  double climatology_bounds(time,nv);
data: // time coordinates translated to date/time format
time="2000-6-16", "2000-7-16", "2000-8-16" ;
climatology_bounds="2000-6-1 6:00:00", "2000-7-1 6:00:00",
  "2000-7-1 6:00:00", "2000-8-1 6:00:00",
  "2000-8-1 6:00:00", "2000-9-1 6:00:00" ;
```


## 7.5. Geometries

For many geospatial applications, data values are associated with a geometry, which is a spatial representation of a real-world feature, for instance a time-series of areal average precipitation over a watershed. Polygonal cells with an arbitrary number of vertices can be described using [Section 7.1, "Cell Boundaries"](#), but in that case every cell must have the same number of vertices and must be a single polygon ring. In contrast, each geometry may have a different number of nodes, the geometries may be lines (as alternatives to points and polygons), and they may be *multipart*, i.e., include several disjoint parts. While line and point geometries don't describe an interval along a dimension as the traditional cell bounds described above do, they do describe the extent of a geometry or real-world feature so are included in this section. The approach described here specifies how to encode such geometries following the pattern in **9.3.3 Contiguous ragged array representation** and attach them to variables in a way that is consistent with the cell bounds approach.

All geometries are made up of one or more nodes. The geometry type specifies the set of topological assumptions to be applied to relate the nodes (see Table 7.1). For example, multipoint and line geometries are nearly the same except nodes are interpreted as being connected for lines. Lines and polygons are also nearly the same except that the first and last nodes are assumed to be connected for polygons. Note that CF does not require the first and last node to be identical but allows them to be coincident if desired. Polygons that have holes, such as waterbodies in a land unit, are encoded as a collection of polygon ring parts, each identified as *exterior* or *interior* polygons. Multipart geometries, such as multiple lines representing the same river or multiple islands representing the same jurisdiction, are encoded as collections of unconnected points, lines, or polygons that are logically grouped into a single geometry.

Any data variable can be given a **geometry** attribute that indicates the geometry for the quantity held in the variable. One of the dimensions of the data variable must be the number of geometries to which the data applies. As shown in Example 7.15, if the data variable has a discrete sampling geometry, the number of geometries is the length of the instance dimension (Section 9.2).

*Example 7.15. Timeseries with geometry.*



```

dimensions:
  instance = 2 ;
  node = 5 ;
  time = 4 ;
variables:
  int time(time) ;
    time:units = "days since 2000-01-01" ;
  double lat(instance) ;
    lat:units = "degrees_north" ;
    lat:standard_name = "latitude" ;
    lat:nodes = "y" ;
  double lon(instance) ;
    lon:units = "degrees_east" ;
    lon:standard_name = "longitude" ;
    lon:nodes = "x" ;
  int datum ;
    datum:grid_mapping_name = "latitude_longitude" ;
    datum:longitude_of_prime_meridian = 0.0 ;
    datum:semi_major_axis = 6378137.0 ;
    datum:inverse_flattening = 298.257223563 ;
  int geometry_container ;
    geometry_container:geometry_type = "line" ;
    geometry_container:node_count = "node_count" ;
    geometry_container:node_coordinates = "x y" ;
  int node_count(instance) ;
  double x(node) ;
    x:units = "degrees_east" ;
    x:standard_name = "longitude" ;
    x:axis = "X" ;
  double y(node) ;
    y:units = "degrees_north" ;
    y:standard_name = "latitude" ;
    y:axis = "Y" ;
  double someData(instance, time) ;
    someData:coordinates = "time lat lon" ;
    someData:grid_mapping = "datum" ;
    someData:geometry = "geometry_container" ;
// global attributes:
:Conventions = "CF-1.8" ;
:featureType = "timeSeries" ;
data:
  time = 1, 2, 3, 4 ;
  lat = 30, 50 ;
  lon = 10, 60 ;
  someData =
    1, 2, 3, 4,
    1, 2, 3, 4 ;
  node_count = 3, 2 ;
  x = 30, 10, 40, 50, 50 ;
  y = 10, 30, 40, 60, 50 ;

```

The time series variable, `someData`, is associated with line geometries via the `geometry` attribute. The first line geometry is comprised of three nodes, while the second has two nodes. Client applications unaware of CF geometries can fall back to the `lat` and `lon` variables to locate feature instances in space. In this example, `lat` and `lon` coordinates are identical to the first node in each line geometry, though any representative point could be used.

A *geometry container* variable acts as a container for attributes that describe a set of geometries. The `geometry` attribute of the data variable contains the name of a geometry container variable. The geometry container variable must hold `geometry_type` and `node_coordinates` attributes. The `grid_mapping` and `coordinates` attributes can be carried by the geometry container variable provided they are also carried by the data variables associated with the container.

The `geometry_type` attribute indicates the type of geometry present. Its allowable values are: *point*, *line*, *polygon*. Multipart geometries are allowed for all three geometry types. For example, polygon geometries could include single part geometries like the State of Colorado and multipart geometries like the State of Hawaii.

The `node_coordinates` attribute contains the blank-separated names of the variables that contain geometry node coordinates (one variable for each spatial dimension). The geometry node coordinate variables must each have an `axis` attribute whose allowable values are X, Y, and Z.

If a `coordinates` attribute is carried by the geometry container variable or its parent data variable, then those coordinate variables that have a meaningful correspondence with node coordinates are indicated as such by a `nodes` attribute that names the corresponding node coordinates, but only if the `grid_mapping` associated with the geometry node variables is the same as that of the coordinate variables. If a different grid mapping is used, then the provided coordinates must not have the `nodes` attribute.

Whether linked to normal CF space-time coordinates with a `nodes` attribute or not, inclusion of such coordinates is recommended to maintain backward compatibility with software that has not implemented geometry capabilities.

The geometry node coordinate variables must all have the same single dimension, which is the total number of nodes in all the geometries. The nodes must be stored consecutively for each geometry and in the order of the geometries, and within each multipart geometry the nodes must be stored consecutively for each part and in the order of the parts. Polygon exterior rings must be stored before any interior rings they may contain. Nodes for polygon exterior rings must be ordered using the right-hand rule, e.g., anticlockwise in the lon-lat plane as viewed from above. Polygon interior rings must be in clockwise order. They are put in opposite orders to facilitate calculation of area and consistency with the typical implementation pattern.

When more than one geometry instance is present, the geometry container variable must have a `node_count` attribute that contains the name of a variable indicating the count of nodes per geometry. The node count is the total number of nodes in all the parts. The exception is when all geometries are single part point geometries, in which case a node count is not needed since each geometry contains a single node. However in that case, the dimension of the node coordinate variables must be one of the dimensions of the data variable (because it serves also as the instance dimension for geometries).

For multipart *lines*, multipart *polygons*, and *polygons* with holes, the geometry container variable must have a **part\_node\_count** attribute that indicates a variable of the count of nodes per geometry part. Note that because multipoint geometries always have a single node per part, the **part\_node\_count** is not required for *point* geometry types. The single dimension of the part node count variable must equal the total number of parts in all the geometries.

For *polygon* geometries with holes, the geometry container variable must have an **interior\_ring** attribute that contains the name of a variable that indicates if the polygon parts are interior rings (i.e., holes) or not. This interior ring variable must contain the value 0 to indicate an exterior ring polygon and 1 to indicate an interior ring polygon. The single dimension of the interior ring variable must be the same dimension as that of the part node count variable. The geometry types included in this convention are listed in Table 7.1.

<b>geometry_type</b>	<b>Dimensionality</b>	<b>Description of Geometry Instance</b>	<b>Additional required attributes on geometry container variable</b>
<b>point</b>	0	A collection of one or more points, where a point is a single location in space	node_count (if multipart geometries are present)
<b>line</b>	1	A collection of one or more lines, where a line is an ordered set of data points connected by linearly interpolating between points	node_count, part_node_count (if multipart geometries are present)
<b>polygon</b>	2	A collection of one or more polygons, where a polygon is a planar surface comprised of an exterior ring and zero or more interior rings (i.e., holes), where a ring is a closed line (i.e., the last point in the line is assumed to be connected to the first point)	node_count, part_node_count (if holes or multipart geometries are present), interior_ring (if holes are present)

**Table 7.1.** Dimensionality, description, and additional required attributes for geometry\_types.



This example demonstrates all potential attributes and variables for encoding geometries.

```
dimensions:
  node = 12 ;
  instance = 2 ;
  part = 4 ;
  time = 4 ;
variables:
  int time(time) ;
    time:units = "days since 2000-01-01" ;
  double x(node) ;
    x:units = "degrees_east" ;
    x:standard_name = "longitude" ;
    x:axis = "X" ;
  double y(node) ;
    y:units = "degrees_north" ;
    y:standard_name = "latitude" ;
    y:axis = "Y" ;
  double lat(instance) ;
    lat:units = "degrees_north" ;
    lat:standard_name = "latitude" ;
    lat:nodes = "y" ;
  double lon(instance) ;
    lon:units = "degrees_east" ;
    lon:standard_name = "longitude" ;
    lon:nodes = "x" ;
  float geometry_container ;
    geometry_container:geometry_type = "polygon" ;
    geometry_container:node_count = "node_count" ;
    geometry_container:node_coordinates = "x y" ;
    geometry_container:grid_mapping = "datum" ;
    geometry_container:coordinates = "lat lon"
    geometry_container:part_node_count = "part_node_count" ;
    geometry_container:interior_ring = "interior_ring" ;
  int node_count(instance) ;
  int part_node_count(part) ;
  int interior_ring(part) ;
  float datum ;
    datum:grid_mapping_name = "latitude_longitude" ;
    datum:semi_major_axis = 6378137. ;
    datum:inverse_flattening = 298.257223563 ;
    datum:longitude_of_prime_meridian = 0. ;
  double someData(instance, time) ;
    someData:coordinates = "time lat lon" ;
    someData:grid_mapping = "datum" ;
    someData:geometry = "geometry_container" ;
// global attributes:
:Conventions = "CF-1.8" ;
```

```
:featureType = "timeSeries" ;  
data:  
  time = 1, 2, 3, 4 ;  
  x = 20, 10, 0, 5, 10, 15, 20, 10, 0, 50, 40, 30 ;  
  y = 0, 15, 0, 5, 10, 5, 20, 35, 20, 0, 15, 0 ;  
  lat = 25, 7 ;  
  lon = 10, 40 ;  
  node_count = 9, 3 ;  
  part_node_count = 3, 3, 3, 3 ;  
  interior_ring = 0, 1, 0, 0 ;  
  someData =  
    1, 2, 3, 4,  
    1, 2, 3, 4 ;
```

# Chapter 8. Reduction of Dataset Size

There are two methods for reducing dataset size: packing and compression. By packing we mean altering the data in a way that reduces its precision. By compression we mean techniques that store the data more efficiently and result in no precision loss. Compression only works in certain circumstances, e.g., when a variable contains a significant amount of missing or repeated data values. In this case it is possible to make use of standard utilities, e.g., UNIX `compress` or GNU `gzip`, to compress the entire file after it has been written. In this section we offer an alternative compression method that is applied on a variable by variable basis. This has the advantage that only one variable need be uncompressed at a given time. The disadvantage is that generic utilities that don't recognize the CF conventions will not be able to operate on compressed variables.

## 8.1. Packed Data

At the current time the netCDF interface does not provide for packing data. However a simple packing may be achieved through the use of the optional NUG defined attributes `scale_factor` and `add_offset`. After the data values of a variable have been read, they are to be multiplied by the `scale_factor`, and have `add_offset` added to them. If both attributes are present, the data are scaled before the offset is added. When scaled data are written, the application should first subtract the offset and then divide by the scale factor. The units of a variable should be representative of the unpacked data.

This standard is more restrictive than the NUG with respect to the use of the `scale_factor` and `add_offset` attributes; ambiguities and precision problems related to data type conversions are resolved by these restrictions. If the `scale_factor` and `add_offset` attributes are of the same data type as the associated variable, the unpacked data is assumed to be of the same data type as the packed data. However, if the `scale_factor` and `add_offset` attributes are of a different data type from the variable (containing the packed data) then the unpacked data should match the type of these attributes, which must both be of type `float` or both be of type `double`. An additional restriction in this case is that the variable containing the packed data must be of type `byte`, `short` or `int`. It is not advised to unpack an `int` into a `float` as there is a potential precision loss.

When data to be packed contains missing values the attributes that indicate missing values (`_FillValue`, `valid_min`, `valid_max`, `valid_range`) must be of the same data type as the packed data. See [Section 2.5.1, "Missing data, valid and actual range of data"](#) for a discussion of how applications should treat variables that have attributes indicating both missing values and transformations defined by a scale and/or offset.

## 8.2. Compression by Gathering

To save space in the netCDF file, it may be desirable to eliminate points from data arrays that are invariably missing. Such a compression can operate over one or more adjacent axes, and is accomplished with reference to a list of the points to be stored. The list is constructed by considering a mask array that only includes the axes to be compressed, and then mapping this array onto one dimension without reordering. The list is the set of indices in this one-dimensional mask of the required points. In the compressed array, the axes to be compressed are all replaced by a single axis, whose dimension is the number of wanted points. The wanted points appear along

this dimension in the same order they appear in the uncompressed array, with the unwanted points skipped over. Compression and uncompression are executed by looping over the list.

The list is stored as the coordinate variable for the compressed axis of the data array. Thus, the list variable and its dimension have the same name. The list variable has a string attribute `compress`, containing a blank-separated list of the dimensions which were affected by the compression in the order of the CDL declaration of the uncompressed array. The presence of this attribute identifies the list variable as such. The list, the original dimensions and coordinate variables (including boundary variables), and the compressed variables with all the attributes of the uncompressed variables are written to the netCDF file. The uncompressed variables can be reconstituted exactly as they were using this information.

*Example 8.1. Horizontal compression of a three-dimensional array*

We eliminate sea points at all depths in a longitude-latitude-depth array of soil temperatures. In this case, only the longitude and latitude axes would be affected by the compression. We construct a list `landpoint(landpoint)` containing the indices of land points.

```
dimensions:
  lat=73;
  lon=96;
  landpoint=2381;
  depth=4;
variables:
  int landpoint(landpoint);
    landpoint:compress="lat lon";
  float landsoilt(depth,landpoint);
    landsoilt:long_name="soil temperature";
    landsoilt:units="K";
  float depth(depth);
  float lat(lat);
  float lon(lon);
data:
  landpoint=363, 364, 365, ...;
```

Since `landpoint(0)=363`, for instance, we know that `landsoilt(*,0)` maps on to point 363 of the original data with dimensions `(lat,lon)`. This corresponds to indices `(3,75)`, i.e.,  $363 = 3 \cdot 96 + 75$ .

### Example 8.2. Compression of a three-dimensional field

We compress a longitude-latitude-depth field of ocean salinity by eliminating points below the sea-floor. In this case, all three dimensions are affected by the compression, since there are successively fewer active ocean points at increasing depths.

```
variables:  
  float salinity(time,oceanpoint);  
  int oceanpoint(oceanpoint);  
    oceanpoint:compress="depth lat lon";  
  float depth(depth);  
  float lat(lat);  
  float lon(lon);  
  double time(time);
```

This information implies that the salinity field should be uncompressed to an array with dimensions *(depth, lat, lon)*.

# Chapter 9. Discrete Sampling Geometries

This chapter provides representations for **discrete sampling geometries**, such as time series, vertical profiles and trajectories. Discrete sampling geometry datasets are characterized by a dimensionality that is lower than that of the space-time region that is sampled; discrete sampling geometries are typically “paths” through space-time.

## 9.1. Features and feature types

Each type of discrete sampling geometry (point, time series, profile or trajectory) is defined by the relationships among its spatiotemporal coordinates. We refer to the type of discrete sampling geometry as its **featureType**. The term “**feature**” refers herein to a single instance of the **discrete sampling geometry** (such as a single time series). The representation of such features in a CF dataset was supported previous to the introduction of this chapter using a particular convention, which is still supported (that described by section 9.3.1). This chapter describes further conventions which offer advantages of efficiency and clarity for storing a collection of features in a single file. When using these new conventions, *the features contained within a collection must always be of the same type; and all the collections in a CF file must be of the same feature type*. (Future versions of CF may allow mixing of multiple feature types within a file.) Table 9.1 presents the feature types covered by this chapter. Details and examples of storage of each of these feature types are provided in Appendix H, as indicated in the table.

<b>featureType</b>	<b>Description of a single feature with this discrete sampling geometry</b>		<b>Link</b>
	<b>Form of a data variable containing values defined on a collection of these features</b>	<b>Mandatory space-time coordinates for a collection of these features</b>	
<b>point</b>	a single data point (having no implied coordinate relationship to other points)		
	data(i)	x(i) y(i) t(i)	<a href="#">Section H.1, "Point Data"</a>
<b>timeSeries</b>	a series of data points at the same spatial location with monotonically increasing times		
	data(i,o)	x(i) y(i) t(i,o)	<a href="#">Section H.2, "Time Series Data"</a>
<b>trajectory</b>	a series of data points along a path through space with monotonically increasing times		
	data(i,o)	x(i,o) y(i,o) t(i,o)	<a href="#">Section H.4, "Trajectory Data"</a>
<b>profile</b>	an ordered set of data points along a vertical line at a fixed horizontal position and fixed time		

<b>featureType</b>	<b>Description of a single feature with this discrete sampling geometry</b>		<b>Link</b>
	data(i,o)	x(i) y(i) z(i,o) t(i)	<a href="#">Section H.3, "Profile Data"</a>
<b>timeSeriesProfile</b>	a series of profile features at the same horizontal position with monotonically increasing times		
	data(i,p,o)	x(i) y(i) z(i,p,o) t(i,p)	<a href="#">Section H.5, "Time Series of Profiles"</a>
<b>trajectoryProfile</b>	a series of profile features located at points ordered along a trajectory		
	data(i,p,o)	x(i,p) y(i,p) z(i,p,o) t(i,p)	<a href="#">Section H.6, "Trajectory of Profiles"</a>

**Table 9.1.** Logical structure and mandatory coordinates for discrete sampling geometry featureTypes.

In Table 9.1 the spatial coordinates  $x$  and  $y$  typically refer to longitude and latitude but other horizontal coordinates could also be used (see sections 4 and 5.6). The spatial coordinate  $z$  refers to vertical position. The time coordinate is indicated as  $t$ . The space-time coordinates that are indicated for each feature are mandatory. However a featureType may also include other space-time coordinates which are not mandatory (notably the  $z$  coordinate). The array subscripts that are shown illustrate only the *logical* structure of the data. The subscripts found in actual CF files are determined by the specific type of representations (see section 9.3).

The designation of dimensions as mandatory precludes the encoding of data variables where geolocation cannot be described as a discrete point location. Problematic examples include:

- time series that refer to a geographical region (e.g. the northern hemisphere), a volume (e.g. the troposphere), or a geophysical quantity in which geolocation information is inherent (e.g. the Southern Oscillation Index (SOI) is the difference between values at two point locations);
- vertical profiles that similarly represent geographically area-averaged values; and
- paths in space that indicate a geographically located feature, but lack a suitable time coordinate (e.g. a meteorological front).

Future versions of CF will generalize the concepts of geolocation to encompass these cases. As of CF version 1.6 such data can be stored using the representations that are documented here by two means: 1) by utilizing the orthogonal multidimensional array representation and omitting the featureType attribute; or 2) by assigning arbitrary coordinates to the mandatory dimensions. For example a globally-averaged latitude position (90s to 90n) could be represented arbitrarily (and poorly) as a latitude position at the equator.

## 9.2. Collections, instances and elements

In Table 9.1 the dimension with subscript  $i$  identifies a particular feature within a collection of

features. It is called the **instance dimension** . One-dimensional variables in a Discrete Geometry CF file, which have *only* this dimension (such as  $x(i)$ ,  $y(i)$  and  $z(i)$  for a timeseries), are **instance variables** . Instance variables provide the metadata that differentiates individual features.

The subscripts  $o$  and  $p$  distinguish the data elements that compose a single feature. For example in a collection of **timeSeries** features, each time series instance,  $i$ , has data values at various times,  $o$ . In a collection of **profile** features, the subscript,  $o$ , provides the index position along the vertical axis of each profile instance. We refer to data values in a feature as its **elements** , and to the dimensions of  $o$  and  $p$  as **element dimensions** . Each feature can have its own set of element subscripts  $o$  and  $p$ . For instance, in a collection of timeSeries features, each individual timeSeries can have its own set of times. The notation  $t(i,o)$  means there is a set of times with subscripts  $o$  for the elements of each feature  $i$ . Feature instances within a collection need not have the same numbers of elements. If the features do all have the same number of elements, and the sequence of element coordinates is identical for all features, savings in simplicity and space are achievable by storing only one copy of these coordinates. This is the essence of the orthogonal multidimensional representation (see section 9.3.1).

If there is only a single feature to be stored in a data variable, there is no need for an instance dimension and it is permitted to omit it. The data will then be one-dimensional, which is a special (degenerate) case of the multidimensional array representation. The instance variables will be scalar coordinate variables; the data variable and other auxiliary coordinate variables will have only an element dimension and not have an instance dimension, e.g.  $data(o)$  and  $t(o)$  for a single timeSeries.

## 9.3. Representations of collections of features in data variables

The individual features within a collection need not necessarily contain the same number of elements. For instance observed in situ time series will commonly contain unique numbers of time points, reflecting different deployment dates of the instruments. Other data sources, such as the output of numerical models, may commonly generate features of identical size. CF offers multiple representations to allow the storage to be optimized for the character of the data. Four types of representation are utilized in this chapter:

- two **multidimensional array representations** , in which each feature instance is allocated the identical amount of storage space. In these representations the instance dimension and the element dimension(s) are distinct CF coordinate axes (typical of coordinate axes discussed in chapter 4); and
- two **ragged array representations** , in which each feature is provided with the minimum amount of space that it requires. In these representations the instances of the individual features are stacked sequentially along the same array dimension as the elements of the features; we refer to this combined dimension as the **sample dimension** .

In the multidimensional array representations, data variables have both an instance dimension and an element dimension. The dimensions may be given in any order. If there is a need for either the instance or an element dimension to be the netCDF unlimited dimension (so that more features or more elements can be appended), then that dimension must be the outer dimension of the data



variable i.e. the leading dimension in CDL.

In the ragged array representations, the instance dimension ( *i* ), which sequences the individual features within the collection, and the element dimension, which sequences the data elements of each feature ( *o* and *p* ), both occupy the same dimension (the sample dimension). If the sample dimension is the netCDF unlimited dimension, new data can be appended to the file.

In all representations, the instance dimension (which is also the sample dimension in ragged representations) may be set initially to a size that is arbitrarily larger than what is required for the features which are available at the time that the file is created. Allocating unused array space in this way (pre-filled with missing values — see also section 9.6, *Missing data* ), can be useful as a means to reserve space that will be available to add features at a later time.

### 9.3.1. Orthogonal multidimensional array representation

The **orthogonal multidimensional array representation** , the simplest representation, can be used if each feature instance in the collection has identical coordinates along the element axis of the features. For example, for a collection of the timeSeries that share a common set of times, or a collection of profiles that share a common set of vertical levels, this is likely to be the natural representation to use. In both examples, there will be longitude and latitude coordinate variables, *x(i)*, *y(i)*, that are one-dimensional and defined along the instance dimension.

Table 9.2 illustrates the storage of a data variable using the orthogonal multidimensional array representation. The data variable holds a collection of 4 features. The individual features, distinguished by color, are sequenced along the horizontal axis by the instance dimension indices, *i1*, *i2*, *i3*, *i4*. Each instance contains three elements, sequenced along the vertical with element dimension indices, *o1*, *o2*, *o3*. The *i* and *o* subscripts would be interchanged (i.e. Table 9.2 would be transposed) if the element dimension were the netCDF unlimited dimension.

(i1, o1)	(i2, o1)	(i3, o1)	(i4, o1)
(i1, o2)	(i2, o2)	(i3, o2)	(i4, o2)
(i1, o3)	(i2, o3)	(i3, o3)	(i4, o3)

Table 9.2 The storage of a data variable using the orthogonal multidimensional array representation (subscripts in CDL order).

The instance variables of a dataset corresponding to Table 9.2 will be one-dimensional with size 4 (for example, the latitude locations of timeSeries),

lat(i1)	lat(i2)	lat(i3)	lat(i4)
---------	---------	---------	---------

and the element coordinate axis will be one-dimensional with size 3 (for example, the time

time(o1)
time(o2)
time(o3)

coordinates that are shared by all of the timeSeries). This representation is consistent with the multidimensional fields described in chapter 5; the characteristic that makes it atypical from chapter 5 (though not incompatible) is that the instance dimension is a discrete axis (see section 4.5).

### 9.3.2. Incomplete multidimensional array representation

The **incomplete multidimensional array representation** can be used if the features within a collection do not all have the same number of elements, but sufficient storage space is available to allocate the number of elements required by the longest feature to all features. That is, features that are shorter than the longest feature must be padded with missing values to bring all instances to the same storage size. This representation sacrifices storage space to achieve simplicity for reading and writing.

Table 9.3 illustrates the storage of a data variable using the orthogonal multidimensional array representation. The data variable holds a collection of 4 features. The individual features, distinguished by color, are sequenced by the instance dimension indices, i1, i2, i3, i4. The instances contain respectively 2, 4, 3 and 6 elements, sequenced by the element dimension index with values of o1, o2, o3, .... The i and o subscripts would be interchanged (i.e. Table 9.3 would be transposed) if the element dimension were the netCDF unlimited dimension.

(i1, o1)	(i2, o1)	(i3, o1)	(i4, o1)
(i1, o2)	(i2, o2)	(i3, o2)	(i4, o2)
	(i2, o3)	(i3, o3)	(i4, o3)
	(i2, o4)		(i4, o4)
			(i4, o5)
			(i4, o6)

Table 9.3. The storage of data using the incomplete multidimensional array representation (subscripts in CDL order).

### 9.3.3. Contiguous ragged array representation

The **contiguous ragged array representation** can be used only if the size of each feature is known at the time that it is created. In this representation the data for each feature will be contiguous on disk, as shown in Table 9.4.

(i1, o1)
(i1, o2)
(i2, o1)
(i2, o2)
(i2, o3)
(i2, o4)
(i3, o1)

(i3, o2)
(i3, o3)
(i4, o1)
(i4, o2)
(i4, o3)
(i4, o4)
(i4, o5)
(i4, o6)

Table 9.4. The storage of data using the contiguous ragged representation (subscripts in CDL order).

In this representation, the file contains a **count variable** , which must be an integer type and

count(i1)	count(i2)	count(i3)	count(i4)
2	4	3	6

must have the instance dimension as its sole dimension. The count variable contains the number of elements that each feature has. This representation and its count variable are identifiable by the presence of an attribute, **sample\_dimension** , found on the count variable, which names the sample dimension being counted. For indices that correspond to features, whose data have not yet been written, the count variable should have a value of zero or a missing value.

### 9.3.4. Indexed ragged array representation

The **indexed ragged array representation** stores the features interleaved along the sample dimension in the data variable as shown in Table 9.4. The canonical use case for this representation is the storage of real-time data streams that contain reports from many sources; the data can be written as it arrives.

(i1, o1)		0
(i2, o1)		1
(i3, o1)		2
(i4, o1)		3
(i4, o2)		3
(i2, o2)		1
(i4, o3)		3
(i4, o4)		3
(i1, o2)		0
(i2, o3)		1
(i3, o2)		2

(i4, o5)		3
(i3, o3)		2
(i2, o4)		1
(i4, o6)		3

Table 9.4 The storage of data using the indexed ragged representation (subscripts in CDL order). The left hand side of the table illustrates a data variable; the right hand side of the table contains the values of the index variable.

In this representation, the file contains an **index variable**, which must be an integer type, and must have the sample dimension as its single dimension. The index variable contains the zero-based index of the feature to which each element belongs. This representation is identifiable by the presence of an attribute, **instance\_dimension**, on the index variable, which names the dimension of the instance variables. For those indices of the sample dimension, into which data have not yet been written, the index variable should be pre-filled with missing values.

## 9.4. The featureType attribute

A global attribute, **featureType**, is required for all Discrete Geometry representations except the orthogonal multidimensional array representation, for which it is highly recommended. The exception is allowed for backwards compatibility, as discussed in 9.3.1. A Discrete Geometry file may include arbitrary numbers of data variables, but (as of CF v1.6) all of the data variables contained in a single file must be of the single feature type indicated by the global **featureType** attribute, if it is present.<sup>1</sup> The value assigned to the **featureType** attribute is case-insensitive; it must be one of the string values listed in the left column of Table 9.1.

## 9.5. Coordinates and metadata

Every feature within a Discrete Geometry CF file must be unambiguously associated with an extensible collection of instance variables that identify the feature and provide other metadata as needed to describe it. Every element of every feature must be unambiguously associated with its space and time coordinates and with the feature that contains it. The **coordinates** attribute must be attached to every data variable to indicate the spatiotemporal coordinate variables that are needed to geo-locate the data.

Where feasible a coordinate or auxiliary coordinate variable with the attribute **cf\_role** should be included. The only acceptable values of **cf\_role** for Discrete Geometry CF data sets are **timeseries\_id**, **profile\_id**, and **trajectory\_id**. The variable carrying the **cf\_role** attribute may have any data type. When a variable is assigned this attribute, it must provide a unique identifier for each feature instance. CF files that contain timeSeries, profile or trajectory featureTypes, should include only a single occurrence of a **cf\_role** attribute; CF files that contain timeSeriesProfile or trajectoryProfile may contain two occurrences, corresponding to the two levels of structure in these feature types.

It is not uncommon for observational data to have two sets of coordinates for particular coordinate axes of a feature: a nominal point location and a more precise location that varies with the

elements in the feature. For example, although an idealized vertical profile is measured at a fixed horizontal position and time, a realistic representation might include the time variations and horizontal drift that occur during the duration of the sampling. Similarly, although an idealized time series exists at a fixed lat-long position, a realistic representation of a moored ocean time series might include the “watch cycle” excursions of horizontal position that occur as a result of tidal currents.

CF Discrete Geometries provides a mechanism to encode both the nominal and the precise positions, while retaining the semantics of the idealized feature type. Only the set of coordinates which are regarded as the nominal (default or preferred) positions should be indicated by the attribute **axis**, which should be assigned string values to indicate the orientations of the axes (**X**, **Y**, **Z**, or **T**). See example A9.2.3.2. Auxiliary coordinate variables containing the nominal and the precise positions should be listed in the relevant **coordinates** attributes of data variables. In orthogonal representations the nominal positions could be coordinate variables, which do not need to be listed in the **coordinates** attribute, rather than auxiliary coordinate variables.

Coordinate bounds may optionally be associated with coordinate variables and auxiliary coordinate variables using the bounds attribute, following the conventions described in section 7.1. Coordinate bounds are especially important for accurate representations of model output data using discrete geometry representations; they record the boundaries of the model grid cells.

If there is a vertical coordinate variable or auxiliary coordinate variable, it must be identified by the means specified in section 4.3. The use of the attribute **axis=Z** is recommended for clarity. A **standard\_name** attribute (see section 3.3) that identifies the vertical coordinate is recommended, e.g. "altitude", "height", etc. . (See the CF Standard Name Table).

## 9.6. Missing Data

In data for discrete sampling geometries written according to the rules of this section, wherever there are unused elements in data storage, the data variable and all its auxiliary coordinate variables (spatial and time) must contain missing values. This situation may arise for the incomplete multidimensional array representation, and in any representation if the instance dimension is set to a larger size than the number of features currently stored. Data variables should (as usual) also contain missing values to indicate when there is no valid data available for the element, although the coordinates are valid.

Similarly, for indices where the instance variable identified by **cf\_role** contains a missing value indicator, all other instance variables should also contain missing values.

# Chapter 10. Reporting Data Uncertainty

This chapter explains the method for reporting **data uncertainty**. It does not describe how to derive the uncertainty value, only how the values are reported.

## 10.1. Uncertainty Variable

Uncertainty values are reported in an ancillary variable linked to the data variable via the required *ancillary\_variables* attribute. A reported uncertainty is a value relative to data values and will need to be added to the data to define the absolute uncertainty range. This standard does not have a method to report absolute uncertainty values in the netCDF file, but does have a method to provide an equation for the user to calculate the absolute uncertainty values. The uncertainty variable data type should match the data variable type (e.g. float type data links to float type uncertainty) to aid the data user in addition. Every uncertainty variable must include a *standard\_name* attribute set to the appropriate standard name. The existence of the uncertainty standard name in the *standard\_name* variable attribute is the minimum requirement and indicator the variable is an uncertainty value that should be added to the data values. The uncertainty variable follows all other CF conventions for attributes including *long\_name*, *units*, *\_FillValue*, *missing\_value*, and *cell\_method*. If the *units* attribute is omitted, the uncertainty units are assumed to equal the data units. Uncertainty variables are often dimensioned the same as the data variable, but that is not a requirement. Scalar uncertainty values are allowed and are added to the data values for upper values and subtracted for lower values. If the uncertainty variable has an additional trailing dimension of length two, it is assumed the two values are the upper and lower uncertainty. The lower uncertainty value (first value) should be a negative value and upper value (second value) positive. This enables the user to simply add uncertainty values to the data value. Multiple data variables linking to a single uncertainty variable is allowed.

*Example 10.1. Minimum requirements for an uncertainty variable*

Example of the minimum metadata required to define an uncertainty variable.

```
float temp(time) ;
    temp:long_name = "Atmospheric air temperature" ;
    temp:units = "degC" ;
    temp:ancillary_variables = "temp_u" ;

float temp_u ;
    temp_u:standard_name = "total_uncertainty" ;
```

## 10.2. Uncertainty Classifications

The general classifications of uncertainty are categorized as *total*, *random*, and *systematic*. Typically a data user will want the uncertainty presented in one of these three categories, or may need all three presented independently. The required *standard\_name* variable attribute must be set to include one of the standard names defining the data as uncertainty. The standard name should end

with "\_uncertainty" to clearly indicate the values are uncertainty values.

- **total\_uncertainty** = Uncertainty including values from all sources including random and systematic. This may be necessary even with random and systematic uncertainty presented in the file since the square root of the sum of squares assumes independence which is not true in all instances.
- **random\_uncertainty** = Uncertainty including all values associated with random processes only.
- **systematic\_uncertainty** = Uncertainty including all values from systematic (i.e. bias) processes only.
- **specific\_total\_uncertainty** = Uncertainty from a specific process that is a component of the total uncertainty including values from both random and systematic. An example is sun glare in retrieving sea surface temperature which is only one component of the total sea surface temperature uncertainty.
- **specific\_random\_uncertainty** = Uncertainty from a specific process that is a component of the total random uncertainty calculated from the errors associated with random processes only.
- **specific\_systematic\_uncertainty** = Uncertainty from a specific process that is a component of the total systematic uncertainty calculated from the errors associated with systematic processes only.
- **computed\_uncertainty** = The uncertainty values need to be computed using the method described in the *formula* attribute or document linked with *references* attribute. The uncertainty standard name is listed under attribute *computed\_standard\_name*.

All uncertainty classifications do not need to be present in the file, only that the *standard\_name* indicating the variable is an uncertainty for each uncertainty variable presented. The general method used to calculate the uncertainty may be explained with *cell\_methods*. A *references* attribute may provide a link to external documentation describing how the values were calculated. The external references should follow the *references* attribute defined in [Section 2.6.2, "Description of file contents"](#). The preferred method is a reference that will not break, as opposed to a basic URL that may become unlinked with domain changes. A DOI is the best option.

#### Example 10.2 Qualitative uncertainty using flag variable methods

A qualitative uncertainty uses the flag variable method to store a numeric indexing number defined with *flag\_values*, *flag\_masks*, and *flag\_meanings* variable attributes as described in [Section 3.5, "Flags"](#).

```
short tree_spacing_uncertainty (species) ;
  tree_spacing_uncertainty:long_name = "The qualitative uncertainty in tree
spacing" ;
  tree_spacing_uncertainty:standard_name = total_uncertainty" ;
  tree_spacing_uncertainty:flag_values = 0, 1, 2, 3 ;
  tree_spacing_uncertainty:flag_meanings = "no_confidence low_confidence
medium_confidence high_confidence" ;
```

## 10.3. Describing uncertainty method with `cell_methods`

Uncertainties are grouped into two types as defined by the [GUM] document. Type A indicates "method of evaluation of uncertainty by the statistical analysis of series of observations," while Type B is defined as a "method of evaluation of uncertainty by means other than the statistical analysis of series of observations". Most of the typical Type A methods are listed under `cell_methods`. Type B methods are too numerous to produce a comprehensive list. To allow for Type B uncertainties without the requirement of adding a large number of new methods to `cell_methods`, use `other_than_statistical_analysis`. The method used to derive the uncertainty value should be listed in a `comment` attribute or in a document linked using the `reference` attribute.

Cell Methods typically used to derive uncertainty:

- **standard\_error** = Standard deviation divided by the square root of number of observations.
- **confidence\_interval** = Interval containing the set of true quantity values of a measurand with a stated probability. For varying confidence intervals along a dimension use `ancillary_variables` under the uncertainty variable to link to a variable providing confidence intervals.
- **full\_width\_half\_maximum** = Interval measured between points of the distribution which are half the maximum amplitude.
- **other\_than\_statistical\_analysis** = A catch-all for the remaining types of methods used to represent the uncertainty considered to be part of Type B uncertainties. A full description of the method should be linked with the `references` attribute or described in a `comment` attribute.

*Example 10.3. Standard deviation multiplier in the `cell_methods`*

Normally standard deviation is provided with no multiplier, but some analyses do use multipliers. If a multiplier was applied to the standard deviation the multiplier value should be provided in `cell_methods` using the standard parenthetical metadata.

```
float atmospheric_temperature_uncertainty ;
    atmospheric_temperature_uncertainty:long_name = "Total uncertainty of
atmospheric temperature" ;
    atmospheric_temperature_uncertainty:units = "degC" ;
    atmospheric_temperature_uncertainty:standard_name = "total_uncertainty" ;
    atmospheric_temperature_uncertainty:cell_methods = "time: standard_deviation
(multiplier 2)" ;
```



#### Example 10.4. Confidence intervals

Since the confidence interval requires a defined interval, the interval is provided in the *cell\_methods* attribute using standard parenthetical metadata.

##### *Consistent confidence interval example*

```
float relative_humidity_uncert ;
  relative_humidity_uncert:long_name = "Relative humidity uncertainty" ;
  relative_humidity_uncert:units = "%" ;
  relative_humidity_uncert:standard_name = "random_uncertainty" ;
  relative_humidity_uncert:cell_methods = "time: height: confidence_interval (at
95%)" ;
```

For varying confidence interval the interval is provided in a separate variable linked to the uncertainty with *ancillary\_variables* attribute.

##### *Varying confidence interval example*

```
float atmos_temp_uncert (time) ;
  atmos_temp_uncert:long_name = "Surface atmospheric temperature uncertainty" ;
  atmos_temp_uncert:units = "degC" ;
  atmos_temp_uncert:standard_name = "random_uncertainty" ;
  atmos_temp_uncert:cell_methods = "time: confidence_interval" ;
  atmos_temp_uncert:ancillary_variables = "confidence_interval" ;

float confidence_interval (time) ;
  confidence_interval:long_name = "Confidence interval for each time step of
uncertainty" ;
  confidence_interval:units = "%" ;
```

Non-symmetrical uncertainties are indicated with the additional dimension of length two. The additional dimension follows the same format as the cell boundaries dimension ([Section 7.1, "Cell Boundaries"](#)) where the first value is the lower uncertainty value and second is upper value. This requires the first uncertainty value(s) to be a negative value to correctly add and produce a lower value.

```

dimensions:
  time: unlimited;
  asym: 2;

variables:
  float precipitation (time) ;
    precipitation:long_name = "Precipitation amount" ;
    precipitation:units = "mm" ;
    precipitation:standard_name = "precipitation_amount" ;
    precipitation:ancillary_variables = "precipitation_uncertainty_sys
precipitation_uncertainty_ran" ;
  float precipitation_uncertainty_sys (asym): // Note this is treated like a
scalar across all values in time
    precipitation_uncertainty_sys:long_name = "Systematic uncertainty of
precipitation amount" ;
    precipitation_uncertainty_sys:standard_name = "systematic_uncertainty" ;
  float precipitation_uncertainty_ran (time, asym) ;
    precipitation_uncertainty_ran:long_name = "Uncertainty of precipitation
amount" ;
    precipitation_uncertainty_ran:standard_name = "random_uncertainty" ;

data:
  precipitation = [0, 0, 1.2, 2.3, 0, ...]
  precipitation_uncertainty_sys = [-0.04, 0.1]
  precipitation_uncertainty_ran = [-0.01, -0.01, -0.241, -0.145, -0.01, ...
                                0.02, 0.02, 0.21, 0.27, 0.02, ...]

```

## 10.4. Computed uncertainty

In some cases the absolute uncertainty values are more easily computed from a data value than added to the file as a variable. The derivation of values follows the [Section 4.3.3, "Parametric Vertical Coordinate"](#) methodology of providing a formula for the user to compute the values. Contrary to the *Parametric Vertical Coordinate* method, the equation is not part of the CF-conventions document, rather is listed in the *formula* attribute under the uncertainty variable or listed in an external document linked by *references* attribute.

The computation requirement is indicated by the *standard\_name* set to ***computed\_uncertainty***. The uncertainty type is indicated by the additional required attribute ***computed\_standard\_name*** set to the correct uncertainty standard name. There is currently no automated method of reading

the *formula* attribute. More complicated uncertainty formula are described in a linked document provided through the *references* attribute. The *formula\_terms* attribute is used to associate terms in the *formula* definitions or *references* document with variables in a netCDF file.

### Example 10.6. Computed uncertainty

For computed uncertainty values, the linked uncertainty variable *standard\_name* attribute is set to *computed\_uncertainty*. The equation used to compute uncertainty values is listed in attribute *formula* with formula term variables listed in the *formula\_terms* attribute. If a single formula is listed the computed values are assumed to be symmetrical and should be added for upper and subtracted for lower uncertainty values. If more than one formula is listed, the *formula* attribute indicate which value is upper and lower uncertainty. For formula description outside of the netCDF file, the formula attribute is omitted in favor of a *references* attribute. Since the values are computed the scalar value written to the file should be a missing value indicator with appropriate *missing\_value* or *\_FillValue* defined.

```

float atmospheric_temperature(time) ;
    atmospheric_temperature:long_name = "Atmospheric temperature" ;
    atmospheric_temperature:units = "degC" ;
    atmospheric_temperature:ancillary_variables =
"atmospheric_temperature_uncertainty_ran atmospheric_temperature_uncertainty_bias
atmospheric_temperature_uncertainty_total" ;

float instrument_temperature(time) ;
    atmospheric_temperature:long_name = "Instrument temperature" ;
    atmospheric_temperature:units = "degC" ;

float atmospheric_temperature_uncertainty_ran ;
    atmospheric_temperature_uncertainty_ran:long_name = "Atmospheric temperature
random uncertainty" ;
    atmospheric_temperature_uncertainty_ran:standard_name = "computed_uncertainty" ;
    atmospheric_temperature_uncertainty_ran:computed_standard_name =
"random_uncertainty" ;
    atmospheric_temperature_uncertainty_ran:formula = "U(k) = A(k) + (A(k) * 0.002 +
T(k) * 0.001)" ;
    atmospheric_temperature_uncertainty_ran:formula_terms = "A:
atmospheric_temperature T: instrument_temperature" ;
    atmospheric_temperature_uncertainty_ran:_FillValue = -999 ;

float atmospheric_temperature_uncertainty_bias ;
    atmospheric_temperature_uncertainty_bias:long_name = "Atmospheric temperature
bias uncertainty" ;
    atmospheric_temperature_uncertainty_bias:comment = "The systematic uncertainty
is the difference between the mean of values calculated from a standard calculated
value." ;
    atmospheric_temperature_uncertainty_bias:standard_name = "computed_uncertainty"
;
    atmospheric_temperature_uncertainty_bias:computed_standard_name =
"systematic_uncertainty" ;
    atmospheric_temperature_uncertainty_bias:formula = "
    U_upper = atmospheric_temperature + 0.01
    U_lower = atmospheric_temperature - 0.005" ;
    atmospheric_temperature_uncertainty_bias:_FillValue = -999 ;

float atmospheric_temperature_uncertainty_total ;
    atmospheric_temperature_uncertainty_total:long_name = "Atmospheric temperature
total uncertainty" ;
    atmospheric_temperature_uncertainty_total:standard_name = "computed_uncertainty"
;
    atmospheric_temperature_uncertainty_total:computed_standard_name =
"total_uncertainty" ;
    atmospheric_temperature_uncertainty_total:references = "doi:10.1088/0026-
1394/47/3/003" ;
    atmospheric_temperature_uncertainty_total:formula_terms = "A:
atmospheric_temperature T: instrument_temperature" ;
    atmospheric_temperature_uncertainty_total:_FillValue = -999 ;

```

## 10.5. External file uncertainty

Uncertainty values are often derived from data after collection and processing. This could result in asynchronous data and uncertainty files. For these data files the uncertainty may be provided in a separate netCDF file using the *external\_variables* method ([Section 2.6.3, "External variables"](#)). In addition, as more data are collected the uncertainty value may evolve over time. For these scalar uncertainties, the uncertainty values can be set to an applicable range by assuming the value applies until a new uncertainty value is provided. To determine if the scalar uncertainty value applies to a range of values, compare the length of the data variable size to the size of the uncertainty variable dimension. If the uncertainty dimension length is greater than one and less than the data dimension length the uncertainty is assumed to be a scalar value that applies to the appropriate range.

*Example 10.6. External file uncertainty applying to time blocks*

For a scalar uncertainty applying to a specific time range, the scalar value can be assumed to apply to all time step values until a new time step value matching or greater to the time is available.

Data File:

dimensions:

```
time = UNLIMITED ; // (120,000 currently)
```

variables:

```
float wave_height (time) ;  
  wave_height:long_name = "Wave height" ;  
  wave_height:units = "m" ;  
  wave_height:ancillary_variables = "wave_height_uncertainty" ;
```

global attributes:

```
external_variables = "wave_height_uncertainty" ;
```

data:

```
time = "2019-09-11 19:35", "2019-09-11 19:45", "2019-09-11 19:55", ...  
wave_height = 1.1, 1.24, 0.9, ...
```

Uncertainty File:

dimensions:

```
time = UNLIMITED ; // (2 currently)
```

variables:

```
float wave_height_uncertainty (time) ;  
  wave_height_uncertainty:long_name = "Uncertainty in wave height" ;  
  wave_height_uncertainty:units = "m" ;  
  wave_height_uncertainty:standard_name = "total_uncertainty" ;  
  wave_height_uncertainty:cell_methods = "time: standard_error" ;
```

data:

```
time = "2019-09-11 19:45:30", "2020-03-01 01:00:00",  
wave_height_uncertainty = 0.01, 0.008
```

# Appendix A: Attributes

All CF attributes are listed here except for those that are used to describe grid mappings. See Appendix F for the grid mapping attributes.

The "Type" values are **S** for string, **N** for numeric, and **D** for the type of the data variable. The "Use" values are **G** for global, **Gr** for applying to groups, **C** for variables containing coordinate data, **D** for data variables, **M** for geometry container variables, **Do** for domain variables, and **-** for variables with a special purpose. "Links" indicates the location of the attribute's original definition (first link) and sections where the attribute is discussed in this document (additional links as necessary).

Table A.1. Attributes

Attribute	Type	Use	Links	Description
<b>actual_range</b>	N	C, D	<a href="#">Section 2.5.1, "Missing data, valid and actual range of data"</a>	The smallest and the largest valid non-missing values occurring in the variable.
<b>add_offset</b>	N	C, D	<a href="#">NUG Appendix A, "Attribute Conventions",</a> and <a href="#">Section 8.1, "Packed Data"</a>	If present for a variable, this number is to be added to the data after it is read by an application. If both <b>scale_factor</b> and <b>add_offset</b> attributes are present, the data are first scaled before the offset is added. In cases where there is a strong constraint on dataset size, it is allowed to pack the coordinate variables (using <b>add_offset</b> and/or <b>scale_factor</b> ), but this is not recommended in general.
<b>ancillary_variables</b>	S	D	<a href="#">Section 3.4, "Ancillary Data"</a>	Identifies a variable that contains closely associated data, e.g., the measurement uncertainties of instrument data.
<b>axis</b>	S	C	<a href="#">Chapter 4, Coordinate Types</a>	Identifies latitude, longitude, vertical, or time axes.
<b>bounds</b>	S	C	<a href="#">Section 7.1, "Cell Boundaries"</a>	Identifies a boundary variable.
<b>calendar</b>	S	C	<a href="#">Section 4.4.1, "Calendar"</a>	Calendar used for encoding time axes.
<b>cell_measures</b>	S	D, Do	<a href="#">Section 7.2, "Cell Measures"</a>	Identifies variables that contain cell areas or volumes.
<b>cell_methods</b>	S	D	<a href="#">Section 7.3, "Cell Methods",</a> <a href="#">Section 7.4, "Climatological Statistics"</a>	Records the method used to derive data that represents cell values.



Attribute	Type	Use	Links	Description
<b>cf_role</b>	S	C	<a href="#">Section 9.5, "Coordinates and metadata"</a>	Identifies the roles of variables that identify features in discrete sampling geometries
<b>climatology</b>	S	C	<a href="#">Section 7.4, "Climatological Statistics"</a>	Identifies a climatology variable.
<b>comment</b>	S	G, C, D	<a href="#">Section 2.6.2, "Description of file contents"</a>	Miscellaneous information about the data or methods used to produce it.
<b>compress</b>	S	C	<a href="#">Section 8.2, "Compression by Gathering"</a> , <a href="#">Section 5.3, "Reduced Horizontal Grid"</a>	Records dimensions which have been compressed by gathering.
<b>computed_standard_name</b>	S	C, D	<a href="#">Section 4.3.3, "Parametric Vertical Coordinate"</a> , <a href="#">Section 10.5, "External file uncertainty"</a>	Indicates the standard name, from the standard name table, of the computed vertical coordinate values or uncertainty values computed according to the formula in the definition.
<b>Conventions</b>	S	G	<a href="#">NUG Appendix A, "Attribute Conventions"</a>	Name of the conventions followed by the dataset.
<b>coordinates</b>	S	D, M, Do	<a href="#">Chapter 5, Coordinate Systems and Domain</a> , <a href="#">Section 6.1, "Labels"</a> , <a href="#">Section 6.2, "Alternative Coordinates"</a>	Identifies auxiliary coordinate variables, label variables, and alternate coordinate variables.
<b>dimensions</b>	S	Do	<a href="#">Section 5.8, "Domain Variables"</a>	Identifies the dimensions that define a domain variable.
<b>external_variables</b>	S	G	<a href="#">Section 2.6.3, "External variables"</a> , <a href="#">Section 7.2, "Cell Measures"</a>	Identifies variables which are named by <b>cell_measures</b> attributes in the file but which are not present in the file.
<b>_FillValue</b>	D	C, D	<a href="#">NUG Appendix A, "Attribute Conventions"</a> , and <a href="#">Section 2.5.1, "Missing data, valid and actual range of data"</a> , and <a href="#">Section 9.6, "Missing Data"</a>	A value used to represent missing or undefined data. Allowed for auxiliary coordinate variables but not allowed for coordinate variables.

Attribute	Type	Use	Links	Description
<b>featureType</b>	S	G	<a href="#">Section 9.4, "The featureType attribute"</a>	Specifies the type of discrete sampling geometry to which the data in the scope of this attribute belongs, and implies that all data variables in the scope of this attribute contain collections of features of that type.
<b>flag_masks</b>	D	D	<a href="#">Section 3.5, "Flags"</a>	Provides a list of bit fields expressing Boolean or enumerated flags.
<b>flag_meanings</b>	S	D	<a href="#">Section 3.5, "Flags"</a>	Use in conjunction with <b>flag_values</b> to provide descriptive words or phrases for each flag value. If multi-word phrases are used to describe the flag values, then the words within a phrase should be connected with underscores.
<b>flag_values</b>	D	D	<a href="#">Section 3.5, "Flags"</a>	Provides a list of the flag values. Use in conjunction with <b>flag_meanings</b> .
<b>formula</b>	S	C	<a href="#">Section 10.4, "Computed uncertainty"</a>	Formula used to calculate values.
<b>formula_terms</b>	S	C	<a href="#">Section 4.3.3, "Parametric Vertical Coordinate"</a> , <a href="#">Section 10.4, "Computed uncertainty"</a>	Identifies variables that correspond to the terms in a formula.
<b>geometry</b>	S	C, D, Do	<a href="#">Section 7.5, "Geometries"</a>	Identifies a variable that defines geometry.
<b>geometry_type</b>	S	M	<a href="#">Section 7.5, "Geometries"</a>	Indicates the type of geometry present.
<b>grid_mapping</b>	S	D, M, Do	<a href="#">Section 5.6, "Horizontal Coordinate Reference Systems, Grid Mappings, and Projections"</a>	Identifies a variable that defines a grid mapping.
<b>history</b>	S	G, Gr	<a href="#">NUG Appendix A, "Attribute Conventions"</a>	List of the applications that have modified the original data.
<b>instance_dimension</b>	S	-	<a href="#">Section 9.3, "Representations of collections of features in data variables"</a>	An attribute which identifies an index variable and names the instance dimension to which it applies. The index variable indicates that the indexed ragged array representation is being used for a collection of features.

Attribute	Type	Use	Links	Description
<b>institution</b>	S	G, D	<a href="#">Section 2.6.2, "Description of file contents"</a>	Where the original data was produced.
<b>interior_ring</b>	S	M	<a href="#">Section 7.5, "Geometries"</a>	Identifies a variable that indicates if polygon parts are interior rings (i.e., holes) or not.
<b>leap_month</b>	N	C	<a href="#">Section 4.4.1, "Calendar"</a>	Specifies which month is lengthened by a day in leap years for a user defined calendar.
<b>leap_year</b>	N	C	<a href="#">Section 4.4.1, "Calendar"</a>	Provides an example of a leap year for a user defined calendar. It is assumed that all years that differ from this year by a multiple of four are also leap years.
<b>long_name</b>	S	C, D, Do	<a href="#">NUG Appendix A, "Attribute Conventions", and Section 3.2, "Long Name"</a>	A descriptive name that indicates a variable's content. This name is not standardized.
<b>missing_value</b>	D	C, D	<a href="#">Section 2.5.1, "Missing data, valid and actual range of data", and Section 9.6, "Missing Data"</a>	A value or values used to represent missing or undefined data. Allowed for auxiliary coordinate variables but not allowed for coordinate variables.
<b>month_lengths</b>	N	C	<a href="#">Section 4.4.1, "Calendar"</a>	Specifies the length of each month in a non-leap year for a user defined calendar.
<b>node_coordinates</b>	S	M	<a href="#">Section 7.5, "Geometries"</a>	Identifies variables that contain geometry node coordinates.
<b>node_count</b>	S	M	<a href="#">Section 7.5, "Geometries"</a>	Identifies a variable indicating the count of nodes per geometry.
<b>nodes</b>	S	C	<a href="#">Section 7.5, "Geometries"</a>	Identifies a coordinate node variable.
<b>part_node_count</b>	S	M	<a href="#">Section 7.5, "Geometries"</a>	Identifies a variable providing the count of nodes per geometry part.
<b>positive</b>	S	C	[COARDS]	Direction of increasing vertical coordinate value.
<b>references</b>	S	G, D	<a href="#">Section 2.6.2, "Description of file contents"</a>	References that describe the data or methods used to produce it.

Attribute	Type	Use	Links	Description
<b>sample_dimension</b>	S	-	<a href="#">Section 9.3, "Representations of collections of features in data variables"</a>	An attribute which identifies a count variable and names the sample dimension to which it applies. The count variable indicates that the contiguous ragged array representation is being used for a collection of features.
<b>scale_factor</b>	N	C, D	<a href="#">NUG Appendix A, "Attribute Conventions", and Section 8.1, "Packed Data"</a>	If present for a variable, the data are to be multiplied by this factor after the data are read by an application. See also the <b>add_offset</b> attribute. In cases where there is a strong constraint on dataset size, it is allowed to pack the coordinate variables (using <code>add_offset</code> and/or <code>scale_factor</code> ), but this is not recommended in general.
<b>source</b>	S	G, D	<a href="#">Section 2.6.2, "Description of file contents"</a>	Method of production of the original data.
<b>standard_error_multiplier</b>	N	D	<a href="#">Appendix C, Standard Name Modifiers</a>	If a data variable with a <code>standard_name</code> modifier of <code>standard_error</code> has this attribute, it indicates that the values are the stated multiple of one standard error.
<b>standard_name</b>	S	C, D	<a href="#">Section 3.3, "Standard Name"</a>	A standard name that references a description of a variable's content in the standard name table.
<b>title</b>	S	G, Gr	<a href="#">NUG Appendix A, "Attribute Conventions"</a>	Short description of the file contents.
<b>units</b>	S	C, D	<a href="#">NUG Appendix A, "Attribute Conventions", and Section 3.1, "Units"</a>	Units of a variable's content.
<b>valid_max</b>	N	C, D	<a href="#">NUG Appendix A, "Attribute Conventions"</a>	Largest valid value of a variable.
<b>valid_min</b>	N	C, D	<a href="#">NUG Appendix A, "Attribute Conventions"</a>	Smallest valid value of a variable.
<b>valid_range</b>	N	C, D	<a href="#">NUG Appendix A, "Attribute Conventions"</a>	Smallest and largest valid values of a variable.

# Appendix B: Standard Name Table Format

The CF standard name table is an XML document (i.e., its format adheres to the XML 1.0 [\[XML\]](#) recommendation). The XML suite of protocols provides a reasonable balance between human and machine readability. It also provides extensive support for internationalization. See the W3C [\[W3C\]](#) home page for more information.

The document begins with a header that identifies it as an XML file:

```
<?xml version="1.0"?>
```

Next is the **standard\_name\_table** itself, which is bracketed by the tags **<standard\_name\_table>** and **</standard\_name\_table>**.

```
<standard_name_table
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="CFStandardNameTable.xsd">
```

The content (delimited by the **<standard\_name\_table>** tags) consists of, in order,

```
<institution>Name of institution here ... </institution>
<contact>E-mail address of contact person ... </contact>
```

followed by a sequence of **entry** elements which may optionally be followed by a sequence of **alias** elements. The **entry** and **alias** elements take the following forms:

```
<entry id="an_id">
  Define the variable whose standard_name attribute has the value "an_id".
</entry>
<alias id="another_id">
  Provide alias for a variable whose standard_name attribute has the
  value "another_id".
</alias>
```

The value of the **id** attribute appearing in the **entry** and **alias** tags is a case sensitive string, containing no whitespace, which uniquely identifies the entry relative to the table. *This is the value used for a variable's **standard\_name** attribute.*

The purpose of the **entry** elements are to provide definitions for the **id** strings. Each **entry** element contains the following elements:

```
<entry id="an_id">
  <canonical_units>Representative units for the variable ... </canonical_units>
  <description>Description of the variable ... </description>
</entry>
```

**Entry** elements may optionally also contain the following elements:

```
<grib>GRIB parameter code</grib>
<amip>AMIP identifier string</amip>
```

Not all variables have equivalent AMIP or GRIB codes. ECMWF GRIB codes start with **E**, NCEP codes with **N**. Standard codes (in the range 1-127) are not prefaced. When a variable has more than one equivalent GRIB code, the alternatives are given as a blank-separated list.

The **alias** elements do not contain definitions. Rather they contain the value of the **id** attribute of an **entry** element that contains the sought after definition. The purpose of the **alias** elements are to provide a means for maintaining the table in a backwards compatible fashion. For example, if more than one **id** string was found to correspond to identical definitions, then the redundant definitions can be converted into aliases. It is not intended that the **alias** elements be used to accommodate the use of local naming conventions in the **standard\_name** attribute strings. Each **alias** element contains a single element:

```
<alias id="an_id">
  <entry_id>Identifier of the defining entry ... </entry_id>
</alias>
```

Example B.1. A name table containing three entries

```
<?xml version="1.0"?>
<standard_name_table>
  <institution>Program for Climate Model Diagnosis and
Intercomparison</institution>
  <contact>support@pcmdi.llnl.gov</contact>
  <entry id="surface_air_pressure">
    <canonical_units>Pa</canonical_units>
    <grib>E134</grib>
    <amip>ps</amip>
    <description>
      The surface called "surface" means the lower boundary of the atmosphere.
    </description>
  </entry>
  <entry id="air_pressure_at_sea_level">
    <canonical_units>Pa</canonical_units>
    <grib>2 E151</grib>
    <amip>psl</amip>
    <description>
      Air pressure at sea level is the quantity often abbreviated
      as MSLP or PMSL. sea_level means mean sea level, which is close
      to the geoid in sea areas.
    </description>
  </entry>
  <alias id="mean_sea_level_pressure">
    <entry_id>air_pressure_at_sea_level</entry_id>
  </alias>
</standard_name_table>
```

The definition of a variable with the `standard_name` attribute `surface_air_pressure` is found directly since the element with `id="surface_air_pressure"` is an `entry` element which contains the definition.

The definition of a variable with the `standard_name` attribute `mean_sea_level_pressure` is found indirectly by first finding the element with the `id="mean_sea_level_pressure"`, and then, since this is an alias element, by searching for the element with `id="air_pressure_at_sea_level"` as indicated by the value of the `entry_id` tag.

It is possible that new tags may be added in the future. Any applications that parse the standard table should be written so that unrecognized tags are gracefully ignored.

# Appendix C: Standard Name Modifiers

In the *Units* column, *u* indicates units dimensionally equivalent to those for the unmodified standard name.

Table C.1. Standard Name Modifiers

Modifier	Units	Description
<code>detection_minimum</code>	<i>u</i>	The smallest data value which is regarded as a detectable signal.
<code>number_of_observations</code>	1	The number of discrete observations or measurements from which a data value has been derived. The use of this modifier is deprecated and the standard_name <code>number_of_observations</code> is preferred to describe this type of metadata variable.
<code>standard_error</code>	<i>u</i>	The uncertainty of the data value. The standard error includes both systematic and statistical uncertainty. By default it is assumed that the values supplied are for one standard error. If the values supplied are for some multiple of the standard error, the <code>standard_error</code> ancillary variable should have an attribute <code>standard_error_multiplier</code> stating the multiplication factor.
<code>status_flag</code>		Flag values indicating the quality or other status of the data values. The variable should have <code>flag_values</code> or <code>flag_masks</code> (or both) and <code>flag_meanings</code> attributes to show how it should be interpreted ( <a href="#">Section 3.5, "Flags"</a> ). The use of this modifier is deprecated and the standard_name <code>status_flag</code> is preferred to describe this type of metadata variable.



# Appendix D: Parametric Vertical Coordinates

The definitions given here allow an application to compute dimensional coordinate values from the parametric vertical coordinate values (usually dimensionless) and associated variables. The formulas are expressed for a gridpoint  $(n, k, j, i)$  where  $i$  and  $j$  are the horizontal indices,  $k$  is the vertical index and  $n$  is the time index. A coordinate variable is associated with its definition by the value of the `standard_name` attribute. The terms in the definition are associated with file variables by the `formula_terms` attribute. The `formula_terms` attribute takes a string value, the string being comprised of blank-separated elements of the form "`term: variable`", where `term` is a case-insensitive keyword that represents one of the terms in the definition, and `variable` is the name of the variable in a netCDF file that contains the values for that term. The order of elements is not significant.

The gridpoint indices are not formally part of the definitions, but are included to illustrate the indices that *might* be present in the file variables. For example, a vertical coordinate whose definition contains a time index is not necessarily time dependent in all netCDF files. Also, the definitions are given in general forms that may be simplified by omitting certain terms. A term that is omitted from the `formula_terms` attribute should be assumed to be zero.

The variables containing the terms may optionally have `standard_name` attributes, with values as indicated in this Appendix. The `standard_name` of the dimensional coordinate values which are computed by the formula may optionally be specified by the `computed_standard_name` attribute of the vertical coordinate variable, as indicated in this Appendix. A `computed_standard_name` is uniquely implied by the formula in some cases, while in others it depends on the `standard_name` of one or more of the terms, with which it must be consistent.

## Atmosphere natural log pressure coordinate

```
standard_name = "atmosphere_ln_pressure_coordinate"
```

### Definition

$$p(k) = p_0 * \exp(-lev(k))$$

where  $p(k)$  is the pressure at gridpoint  $(k)$ ,  $p_0$  is a reference pressure,  $lev(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$ .

The format for the `formula_terms` attribute is

```
formula_terms = "p0: var1 lev: var2"
```

The `standard_name` of  $p_0$  is `reference_air_pressure_for_atmosphere_vertical_coordinate`. The `computed_standard_name` is `air_pressure`.

# Atmosphere sigma coordinate

```
standard_name = "atmosphere_sigma_coordinate"
```

## Definition

$$p(n,k,j,i) = p_{top} + \text{sigma}(k) * (ps(n,j,i) - p_{top})$$

where  $p(n,k,j,i)$  is the pressure at gridpoint  $(n,k,j,i)$ ,  $p_{top}$  is the pressure at the top of the model,  $\text{sigma}(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$ , and  $ps(n,j,i)$  is the surface pressure at horizontal gridpoint  $(j,i)$  and time  $(n)$ .

The format for the `formula_terms` attribute is

```
formula_terms = "sigma: var1 ps: var2 ptop: var3"
```

The `standard_name` of `ptop` is `air_pressure_at_top_of_atmosphere_model`, and of `ps` is `surface_air_pressure`. The `computed_standard_name` is `air_pressure`.

# Atmosphere hybrid sigma pressure coordinate

```
standard_name = "atmosphere_hybrid_sigma_pressure_coordinate"
```

## Definition

$$p(n,k,j,i) = a(k) * p_0 + b(k) * ps(n,j,i)$$

or

$$p(n,k,j,i) = ap(k) + b(k) * ps(n,j,i)$$

where  $p(n,k,j,i)$  is the pressure at gridpoint  $(n,k,j,i)$ ,  $a(k)$  or  $ap(k)$  and  $b(k)$  are components of the hybrid coordinate at level  $k$ ,  $p_0$  is a reference pressure, and  $ps(n,j,i)$  is the surface pressure at horizontal gridpoint  $(j,i)$  and time  $(n)$ . The choice of whether  $a(k)$  or  $ap(k)$  is used depends on model formulation; the former is a dimensionless fraction, the latter a pressure value. In both formulations,  $b(k)$  is a dimensionless fraction.

The format for the `formula_terms` attribute is

```
formula_terms = "a: var1 b: var2 ps: var3 p0: var4"
```

where `a` is replaced by `ap` if appropriate.

The hybrid sigma-pressure coordinate for level  $k$  is defined as  $a(k)+b(k)$  or  $ap(k)/p_0+b(k)$ , as appropriate.

The `standard_name` of  $p_0$  is `reference_air_pressure_for_atmosphere_vertical_coordinate`, and of  $ps$  is `surface_air_pressure`. The `computed_standard_name` is `air_pressure`. No `standard_name` has been defined for  $a$ ,  $b$  or  $ap$ .

## Atmosphere hybrid height coordinate

```
standard_name = "atmosphere_hybrid_height_coordinate"
```

### Definition

$$z(n,k,j,i) = a(k) + b(k)*orog(n,j,i)$$

where  $z(n,k,j,i)$  is the height above the datum (e.g. the geoid, which is approximately mean sea level) at gridpoint  $(k,j,i)$  and time  $(n)$ ,  $orog(n,j,i)$  is the height of the surface above the datum at  $(j,i)$  and time  $(n)$ , and  $a(k)$  and  $b(k)$  are the coordinates which define hybrid height level  $k$ .  $a(k)$  has the dimensions of height and  $b(i)$  is dimensionless.

The format for the `formula_terms` attribute is

```
formula_terms = "a: var1 b: var2 orog: var3"
```

The `standard_name` of `orog` may be `surface_altitude` (i.e. above the geoid) or `surface_height_above_geopotential_datum`. The `computed_standard_name` is `altitude` or `height_above_geopotential_datum` in these cases respectively. No `standard_name` has been defined for  $b$ . There is no dimensionless coordinate because  $a$ , which has the `standard_name` of `atmosphere_hybrid_height_coordinate`, is the best choice for a level-dependent but geographically constant coordinate.

## Atmosphere smooth level vertical (SLEVE) coordinate

```
standard_name = "atmosphere_sleve_coordinate"
```

### Definition

$$z(n,k,j,i) = a(k)*ztop + b1(k)*zsurf1(n,j,i) + b2(k)*zsurf2(n,j,i)$$

where  $z(n,k,j,i)$  is the height above the datum (e.g. the geoid, which is approximately mean sea level) at gridpoint  $(k,j,i)$  and time  $(n)$ ,  $ztop$  is the height of the top of the model above the datum, and  $a(k)$ ,  $b1(k)$ , and  $b2(k)$  are the dimensionless coordinates which define hybrid level  $k$ .  $zsurf1(n,j,i)$  and  $zsurf2(n,j,i)$  are respectively the large-scale and small-scale components of the topography, and  $a$ ,  $b1$  and  $b2$  are all functions of the dimensionless SLEVE coordinate. See Shaer et al

[SCH02] for details.

The format for the `formula_terms` attribute is

```
formula_terms = "a: var1 b1: var2 b2: var3 ztop: var4 zsurf1: var5  
                zsurf2: var6"
```

The `standard_name` of `ztop` may be `altitude_at_top_of_atmosphere_model` (i.e. above the geoid) or `height_above_geopotential_datum_at_top_of_atmosphere_model`. The `computed_standard_name` is `altitude` or `height_above_geopotential_datum` in these cases respectively. No `standard_name` has been defined for `b1`, `zsurf1`, `b2` or `zsurf2`.

## Ocean sigma coordinate

```
standard_name = "ocean_sigma_coordinate"
```

### Definition

$$z(n,k,j,i) = \text{eta}(n,j,i) + \text{sigma}(k) * (\text{depth}(j,i) + \text{eta}(n,j,i))$$

where  $z(n,k,j,i)$  is height (positive upwards) relative to the datum (e.g. mean sea level) at gridpoint  $(n,k,j,i)$ ,  $\text{eta}(n,j,i)$  is the height of the sea surface (positive upwards) relative to the datum at gridpoint  $(n,j,i)$ ,  $\text{sigma}(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$ , and  $\text{depth}(j,i)$  is the distance (a positive value) from the datum to the sea floor at horizontal gridpoint  $(j,i)$ .

The format for the `formula_terms` attribute is

```
formula_terms = "sigma: var1 eta: var2 depth: var3"
```

The `standard_names` for `eta` and `depth` and the `computed_standard_name` must be one of the consistent sets shown in [Table D.1](#).

## Ocean s-coordinate

```
standard_name = "ocean_s_coordinate"
```

### Definition

$$z(n,k,j,i) = \text{eta}(n,j,i) * (1+s(k)) + \text{depth}_c * s(k) + (\text{depth}(j,i) - \text{depth}_c) * C(k)$$

where

$$C(k) = (1-b)*\sinh(a*s(k))/\sinh(a) + b*[\tanh(a*(s(k)+0.5))/(2*\tanh(0.5*a)) - 0.5]$$

where  $z(n,k,j,i)$  is height (positive upwards) relative to the datum (e.g. mean sea level) at gridpoint  $(n,k,j,i)$ ,  $\eta(n,j,i)$  is the height of the sea surface (positive upwards) relative to the datum at gridpoint  $(n,j,i)$ ,  $s(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$ , and  $\text{depth}(j,i)$  is the distance (a positive value) from the datum to the sea floor at horizontal gridpoint  $(j,i)$ . The constants  $a$ ,  $b$ , and  $\text{depth}_c$  control the stretching. The constants  $a$  and  $b$  are dimensionless, and  $\text{depth}_c$  must have units of length.

The format for the `formula_terms` attribute is

```
formula_terms = "s: var1 eta: var2 depth: var3 a: var4 b: var5 depth_c: var6"
```

The `standard_names` for `eta` and `depth` and the `computed_standard_name` must be one of the consistent sets shown in [Table D.1](#). No `standard_name` has been defined for  $a$ ,  $b$  or  $\text{depth}_c$ .

## Ocean s-coordinate, generic form 1

```
standard_name = "ocean_s_coordinate_g1"
```

### Definition

$$z(n,k,j,i) = S(k,j,i) + \eta(n,j,i) * (1 + S(k,j,i) / \text{depth}(j,i))$$

where

$$S(k,j,i) = \text{depth}_c * s(k) + (\text{depth}(j,i) - \text{depth}_c) * C(k)$$

where  $z(n,k,j,i)$  is height, positive upwards, relative to ocean datum (e.g. mean sea level) at gridpoint  $(n,k,j,i)$ ,  $\eta(n,j,i)$  is the height of the ocean surface, positive upwards, relative to ocean datum at gridpoint  $(n,j,i)$ ,  $s(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$  with a range of  $-1 \leq s(k) \leq 0$ ,  $s(0)$  corresponds to  $\eta(n,j,i)$  whereas  $s(-1)$  corresponds to  $\text{depth}(j,i)$ ;  $C(k)$  is the dimensionless vertical coordinate stretching function at gridpoint  $(k)$  with a range of  $-1 \leq C(k) \leq 0$ ,  $C(0)$  corresponds to  $\eta(n,j,i)$  whereas  $C(-1)$  corresponds to  $\text{depth}(j,i)$ ; the constant  $\text{depth}_c$ , (positive value), is a critical depth controlling the stretching and  $\text{depth}(j,i)$  is the distance from ocean datum to sea floor (positive value) at horizontal gridpoint  $(j,i)$ .

The format for the `formula_terms` attribute is

```
formula_terms = "s: var1 C: var2 eta: var3 depth: var4 depth_c: var5"
```

The `standard_names` for `eta` and `depth` and the `computed_standard_name` must be one of the consistent

sets shown in [Table D.1](#). No `standard_name` has been defined for `C` or `depth_c`.

## Ocean s-coordinate, generic form 2

```
standard_name = "ocean_s_coordinate_g2"
```

### Definition

$$z(n,k,j,i) = \text{eta}(n,j,i) + (\text{eta}(n,j,i) + \text{depth}(j,i)) * S(k,j,i)$$

where

$$S(k,j,i) = (\text{depth}_c * s(k) + \text{depth}(j,i) * C(k)) / (\text{depth}_c + \text{depth}(j,i))$$

where  $z(n,k,j,i)$  is height, positive upwards, relative to ocean datum (e.g. mean sea level) at gridpoint  $(n,k,j,i)$ ,  $\text{eta}(n,j,i)$  is the height of the ocean surface, positive upwards, relative to ocean datum at gridpoint  $(n,j,i)$ ,  $s(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$  with a range of  $-1 \leq s(k) \leq 0$ ,  $S(0)$  corresponds to  $\text{eta}(n,j,i)$  whereas  $s(-1)$  corresponds to  $\text{depth}(j,i)$ ;  $C(k)$  is the dimensionless vertical coordinate stretching function at gridpoint  $(k)$  with a range of  $-1 \leq C(k) \leq 0$ ,  $C(0)$  corresponds to  $\text{eta}(n,j,i)$  whereas  $C(-1)$  corresponds to  $\text{depth}(j,i)$ ; the constant  $\text{depth}_c$ , (positive value), is a critical depth controlling the stretching and  $\text{depth}(j,i)$  is the distance from ocean datum to sea floor (positive value) at horizontal gridpoint  $(j,i)$ .

The format for the `formula_terms` attribute is

```
formula_terms = "s: var1 C: var2 eta: var3 depth: var4 depth_c: var5"
```

The `standard_names` for `eta` and `depth` and the `computed_standard_name` must be one of the consistent sets shown in [Table D.1](#). No `standard_name` has been defined for `C` or `depth_c`.

## Ocean sigma over z coordinate

```
standard_name = "ocean_sigma_z_coordinate"
```

### Definition

```
for k <= nsigma:
    z(n,k,j,i) = eta(n,j,i) + sigma(k)*(min(depth_c,depth(j,i))+eta(n,j,i))

for k > nsigma:
    z(n,k,j,i) = zlev(k)
```

where  $z(n,k,j,i)$  is height (positive upwards) relative to the datum (e.g. mean sea level) at gridpoint  $(n,k,j,i)$ ,  $\eta(n,j,i)$  is the height of the sea surface (positive upwards) relative to the datum at gridpoint  $(n,j,i)$ ,  $\sigma(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$  for  $k \leq n_{\sigma}$ , and  $\text{depth}(j,i)$  is the distance (a positive value) from the datum to the sea floor at horizontal gridpoint  $(j,i)$ . Above depth  $\text{depth}_c$  there are  $n_{\sigma}$  layers and below this depth the levels are surfaces of constant height  $z_{\text{lev}}$  (positive upwards) relative to the datum.

The format for the `formula_terms` attribute is

```
formula_terms = "sigma: var1 eta: var2 depth: var3 depth_c: var4 nsigma: var5
                zlev: var6"
```

The `standard_names` for `eta`, `depth`, `zlev` and the `computed_standard_name` must be one of the consistent sets shown in [Table D.1](#). No `standard_name` has been defined for `depth_c` or `nsigma`.

## Ocean double sigma coordinate

```
standard_name = "ocean_double_sigma_coordinate"
```

### Definition

```
for k <= k_c:
    z(k,j,i)= sigma(k)*f(j,i)

for k > k_c:
    z(k,j,i)= f(j,i) + (sigma(k)-1)*(depth(j,i)-f(j,i))

f(j,i)= 0.5*(z1+ z2) + 0.5*(z1-z2)* tanh(2*a/(z1-z2)*(depth(j,i)-href))
```

where  $z(k,j,i)$  is height (positive upwards) relative to the datum (e.g. mean sea level) at gridpoint  $(k,j,i)$ ,  $\sigma(k)$  is the dimensionless coordinate at vertical gridpoint  $(k)$  for  $k \leq k_c$ , and  $\text{depth}(j,i)$  is the distance (a positive value) from the datum to sea floor at horizontal gridpoint  $(j,i)$ .  $z_1$ ,  $z_2$ ,  $a$ , and  $\text{href}$  are constants with units of length.

The format for the `formula_terms` attribute is

```
formula_terms = "sigma: var1 depth: var2 z1: var3 z2: var4 a: var5 href: var6
                k_c: var7"
```

The `standard_name` for `depth` and the `computed_standard_name` must be one of the consistent sets shown in [Table D.1](#). No `standard_name` has been defined for `z1`, `z2`, `a`, `href` or `k_c`.

Table D.1. Consistent sets of values for the `standard_names` of formula terms and the `computed_standard_name` needed in defining the ocean sigma coordinate, the ocean s-coordinate, the ocean\_sigma over z coordinate, and the ocean double sigma coordinate.

option	standard_name of computed dimensional coordinate	formula term name	standard_name of formula term
1	altitude	zlev	altitude
		eta	sea_surface_height_above_geoid
		depth	sea_floor_depth_below_geoid
2	height_above_geopotential_datum	zlev	height_above_geopotential_datum
		eta	sea_surface_height_above_geopotential_datum
		depth	sea_floor_depth_below_geopotential_datum
3	height_above_reference_ellipsoid	zlev	height_above_reference_ellipsoid
		eta	sea_surface_height_above_reference_ellipsoid
		depth	sea_floor_depth_below_reference_ellipsoid
4	height_above_mean_sea_level	zlev	height_above_mean_sea_level
		eta	sea_surface_height_above_mean_sea_level
		depth	sea_floor_depth_below_mean_sea_level



# Appendix E: Cell Methods

In the *Units* column, *u* indicates the units of the physical quantity before the method is applied.

Table E.1. Cell Methods

cell_methods	Units	Description
point	<i>u</i>	The data values are representative of points in space or time (instantaneous). This is the default method for a quantity that is intensive with respect to the specified dimension.
sum	<i>u</i>	The data values are representative of a sum or accumulation over the cell. This is the default method for a quantity that is extensive with respect to the specified dimension.
maximum	<i>u</i>	Maximum
maximum_absolute_value	<i>u</i>	Maximum absolute value
median	<i>u</i>	Median
mid_range	<i>u</i>	Average of maximum and minimum
minimum	<i>u</i>	Minimum
minimum_absolute_value	<i>u</i>	Minimum absolute value
mean	<i>u</i>	Mean (average value)
mean_absolute_value	<i>u</i>	Mean absolute value
mean_of_upper_decile	<i>u</i>	Mean of the upper group of data values defined by the upper tenth of their distribution
mode	<i>u</i>	Mode (most common value)
range	<i>u</i>	Absolute difference between maximum and minimum
root_mean_square	<i>u</i>	Root mean square (RMS)
standard_deviation	<i>u</i>	Standard deviation
sum_of_squares	$u^2$	Sum of squares
variance	$u^2$	Variance

# Appendix F: Grid Mappings

Each recognized grid mapping is described in one of the sections below. Each section contains: the valid name that is used with the `grid_mapping_name` attribute; a list of the specific attributes that may be used to assign values to the mapping's parameters; the standard names used to identify the coordinate variables that contain the mapping's independent variables; and references to the mapping's definition or other information that may help in using the mapping. Since the attributes used to set a mapping's parameters may be shared among several mappings, their definitions are contained in a table in the final section. The attributes which describe the ellipsoid and prime meridian may be included, when applicable, with any grid mapping. These are:

- `earth_radius`
- `inverse_flattening`
- `longitude_of_prime_meridian`
- `prime_meridian_name`
- `reference_ellipsoid_name`
- `semi_major_axis`
- `semi_minor_axis`

We have used the FGDC "Content Standard for Digital Geospatial Metadata" [FGDC] as a guide in choosing the values for `grid_mapping_name` and the attribute names for the parameters describing map projections.

## Albers Equal Area

```
grid_mapping_name = albers_conical_equal_area
```

### *Map parameters:*

- `standard_parallel` - There may be 1 or 2 values.
- `longitude_of_central_meridian`
- `latitude_of_projection_origin`
- `false_easting` - This parameter is optional (default is 0)
- `false_northing` - This parameter is optional (default is 0)

### *Map coordinates:*

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the `standard_name` attribute values `projection_x_coordinate` and `projection_y_coordinate` respectively.

### *Notes:*

Notes on using the PROJ software package for computing the mapping may be found at <https://proj.org/operations/projections/aea.html> and [http://geotiff.maptools.org/proj\\_list/albers\\_equal\\_area\\_conic.html](http://geotiff.maptools.org/proj_list/albers_equal_area_conic.html).

# Azimuthal equidistant

```
grid_mapping_name = azimuthal_equidistant
```

## Map parameters:

- **longitude\_of\_projection\_origin**
- **latitude\_of\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

## Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

## Notes:

Notes on using the **PROJ** software package for computing the mapping may be found at [http://geotiff.maptools.org/proj\\_list/azimuthal\\_equidistant.html](http://geotiff.maptools.org/proj_list/azimuthal_equidistant.html) and <https://proj.org/operations/projections/aeqd.html>.

# Geostationary projection

```
grid_mapping_name = geostationary
```

## Map parameters:

- **latitude\_of\_projection\_origin**
- **longitude\_of\_projection\_origin**
- **perspective\_point\_height**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)
- **sweep\_angle\_axis**
- **fixed\_angle\_axis**

## Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_angular\_coordinate** and **projection\_y\_angular\_coordinate**, respectively. It is assumed that the y-axis is aligned to the Earth's N/S axis, whereas the x-axis aligns with the E/W axis. CF specified the standard names **projection\_x\_coordinate** and **projection\_y\_coordinate** for these coordinates prior to version 1.9, but that use is deprecated. In the case of this projection, the projection coordinates are the scanning angle of the satellite instrument.

## Notes:

The geostationary projection assumes a hypothetical view of the Earth from a perspective above the Earth where the azimuth and elevation viewing angles are described using a hypothetical gimbal model. This model is independent of the physical scan principles of any observing instrument. The model consists conceptually of a set of two rotating circles with a colocated centre, whose axes of rotation are perpendicular to each other. The axis of the outer circle is stationary, while the axis of the inner circle moves about the stationary axis. This means that a given viewing angle described using this model is the result of matrix multiplications, which is not commutative, so that order of operations is essential in achieving accurate results. The two axes are conventionally called the sweep-angle and fixed-angle axes; we adhere to this terminology, although some find these terms confusing, for the sake of interoperability with existing implementations.

The algorithm for computing the mapping may be found at [http://www.cgms-info.org/documents/pdf\\_cgms\\_03.pdf](http://www.cgms-info.org/documents/pdf_cgms_03.pdf). This document assumes the point of observation is directly over the equator, and that the `sweep_angle_axis` is `y`.

Explanatory diagrams for the projection may be found [on the PROJ website](#), as well as notes on using the PROJ software for computing the mapping.

The `perspective_point_height` is the distance to the surface of the ellipsoid.

The `sweep_angle_axis` attribute indicates the axis on which the view sweeps. It corresponds to the outer-gimbal (stable) axis of the gimbal view model. For example, the value = `"y"` corresponds to the Meteosat satellites, the value = `"x"` to the GOES satellites.

The `fixed_angle_axis` attribute indicates the axis on which the view is fixed. It corresponds to the inner-gimbal axis of the gimbal view model, whose axis of rotation moves about the outer-gimbal axis. If `fixed_angle_axis` is `"x"`, `sweep_angle_axis` is `"y"`, and vice versa. Only one of those the attributes `fixed_angle_axis` or `sweep_angle_axis` is mandatory, as they can be used to infer each other. Note also that the values `"x"` and `"y"` are not case-sensitive.

The use of `projection_x_coordinate` and `projection_y_coordinate` was deprecated in version 1.9 of the CF Conventions. The initial definition of this projection used these standard names to identify the projection coordinates even though their canonical units (meters) do not match those required for this projection (radians).

## Lambert azimuthal equal area

```
grid_mapping_name = lambert_azimuthal_equal_area
```

### Map parameters:

- `longitude_of_projection_origin`
- `latitude_of_projection_origin`
- `false_easting` - This parameter is optional (default is 0)
- `false_northing` - This parameter is optional (default is 0)

### Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### Notes:

Notes on using the **PROJ** software package for computing the mapping may be found at <https://proj.org/operations/projections/laea.html> and [http://geotiff.maptools.org/proj\\_list/lambert\\_azimuthal\\_equal\\_area.html](http://geotiff.maptools.org/proj_list/lambert_azimuthal_equal_area.html)

## Lambert conformal

```
grid_mapping_name = lambert_conformal_conic
```

### Map parameters:

- **standard\_parallel** - There may be 1 or 2 values.
- **longitude\_of\_central\_meridian**
- **latitude\_of\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

### Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### Notes:

Notes on using the **PROJ** software package for computing the mapping may be found at <https://proj.org/operations/projections/lcc.html>, and [http://geotiff.maptools.org/proj\\_list/lambert\\_conic\\_conformal\\_1sp.html](http://geotiff.maptools.org/proj_list/lambert_conic_conformal_1sp.html) ("Lambert Conic Conformal (1SP)" or EPSG 9801) or [http://geotiff.maptools.org/proj\\_list/lambert\\_conic\\_conformal\\_2sp.html](http://geotiff.maptools.org/proj_list/lambert_conic_conformal_2sp.html) ("Lambert Conic Conformal (2SP)" or EPSG 9802). For the 1SP variant, **latitude\_of\_projection\_origin=standard\_parallel** and the PROJ scale factor is 1.

## Lambert Cylindrical Equal Area

```
grid_mapping_name = lambert_cylindrical_equal_area
```

### Map parameters:

- **longitude\_of\_central\_meridian**
- Either **standard\_parallel** or **scale\_factor\_at\_projection\_origin** (deprecated)
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

### **Map coordinates:**

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### **Notes:**

Notes on using the **PROJ** software packages for computing the mapping may be found at <https://proj.org/operations/projections/cea.html> and [http://geotiff.maptools.org/proj\\_list/cylindrical\\_equal\\_area.html](http://geotiff.maptools.org/proj_list/cylindrical_equal_area.html) ("Lambert Cylindrical Equal Area" or EPSG 9834 or EPSG 9835). Detailed formulas can be found in [Snyder] pages 76-85.

## Latitude-Longitude

```
grid_mapping_name = latitude_longitude
```

This grid mapping defines the canonical 2D geographical coordinate system based upon latitude and longitude coordinates on a spherical Earth. It is included so that the figure of the Earth can be described.

### **Map parameters:**

None.

### **Map coordinates:**

The rectangular coordinates are longitude and latitude identified by the usual conventions (Section 4.1, "Latitude Coordinate" and Section 4.2, "Longitude Coordinate").

## Mercator

```
grid_mapping_name = mercator
```

### **Map parameters:**

- **longitude\_of\_projection\_origin**
- Either **standard\_parallel** (EPSG 9805) or **scale\_factor\_at\_projection\_origin** (EPSG 9804)
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

### **Map coordinates:**

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### **Notes:**

Notes on using the **PROJ** software packages for computing the mapping may be found at <https://proj.org/operations/projections/merc.html> and [http://geotiff.maptools.org/proj\\_list/mercator\\_1sp.html](http://geotiff.maptools.org/proj_list/mercator_1sp.html) ("Mercator (1SP)" or EPSG 9804) or [http://geotiff.maptools.org/proj\\_list/mercator\\_2sp.html](http://geotiff.maptools.org/proj_list/mercator_2sp.html) ("Mercator (2SP)" or EPSG 9805).

More information on formulas available in [\[OGP-EPSS\\_GN7\\_2\]](#).

## Oblique Mercator

```
grid_mapping_name = oblique_mercator
```

### Map parameters:

- **azimuth\_of\_central\_line**
- **latitude\_of\_projection\_origin**
- **longitude\_of\_projection\_origin**
- **scale\_factor\_at\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

### Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### Notes:

Notes on using the **PROJ** software package for computing the mapping may be found at <https://proj.org/operations/projections/omerc.html> and [http://geotiff.maptools.org/proj\\_list/oblique\\_mercator.html](http://geotiff.maptools.org/proj_list/oblique_mercator.html). The Rotated Mercator projection is an Oblique Mercator projection with azimuth = +90.

## Orthographic

```
grid_mapping_name = orthographic
```

### Map parameters:

- **longitude\_of\_projection\_origin**
- **latitude\_of\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

### Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### Notes:

Notes on using the **PROJ** software packages for computing the mapping may be found at <https://proj.org/operations/projections/ortho.html> and [http://geotiff.maptools.org/proj\\_list/orthographic.html](http://geotiff.maptools.org/proj_list/orthographic.html) ("Orthographic" or EPSG 9840).

More information on formulas available in [\[OGP-EPSSG\\_GN7\\_2\]](#).

## Polar stereographic

```
grid_mapping_name = polar_stereographic
```

### Map parameters:

- **straight\_vertical\_longitude\_from\_pole**
- **latitude\_of\_projection\_origin** - Either +90. or -90.
- Either **standard\_parallel** (EPSG 9829) or **scale\_factor\_at\_projection\_origin** (EPSG 9810)
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

### Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

### Notes:

Notes on using the **PROJ** software package for computing the mapping may be found at <https://proj.org/operations/projections/ups.html> and [http://geotiff.maptools.org/proj\\_list/polar\\_stereographic.html](http://geotiff.maptools.org/proj_list/polar_stereographic.html).

The **standard\_parallel** variant corresponds to EPSG Polar Stereographic (Variant B) (EPSG dataset coordinate operation method code 9829), while the **scale\_factor\_at\_projection\_origin** variant corresponds to EPSG Polar Stereographic (Variant A) (EPSG dataset coordinate operation method code 9810). As PROJ requires the standard parallel, [Snyder] formula 21-7 can be used to compute it from the scale factor if needed.

## Rotated pole

```
grid_mapping_name = rotated_latitude_longitude
```

### Map parameters:

- **grid\_north\_pole\_latitude**
- **grid\_north\_pole\_longitude**
- **north\_pole\_grid\_longitude** - This parameter is optional (default is 0).

### Map coordinates:

The rotated latitude and longitude coordinates are identified by the **standard\_name** attribute values **grid\_latitude** and **grid\_longitude** respectively.

### Notes:



# Sinusoidal

```
grid_mapping_name = sinusoidal
```

## Map parameters:

- **longitude\_of\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

## Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

## Notes:

Notes on using the **PROJ** software package for computing the mapping may be found at <https://proj.org/operations/projections/sinu.html> and [http://geotiff.maptools.org/proj\\_list/sinusoidal.html](http://geotiff.maptools.org/proj_list/sinusoidal.html). Detailed formulas can be found in [Snyder], pages 243-248.

# Stereographic

```
grid_mapping_name = stereographic
```

## Map parameters:

- **longitude\_of\_projection\_origin**
- **latitude\_of\_projection\_origin**
- **scale\_factor\_at\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

## Map coordinates:

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

## Notes:

Formulas for the mapping and its inverse along with notes on using the **PROJ** software package for doing the calculations may be found at <https://proj.org/operations/projections/stere.html> and [http://geotiff.maptools.org/proj\\_list/stereographic.html](http://geotiff.maptools.org/proj_list/stereographic.html). See the section "Polar stereographic" for the special case when the projection origin is one of the poles.

# Transverse Mercator

```
grid_mapping_name = transverse_mercator
```

**Map parameters:**

- **scale\_factor\_at\_central\_meridian**
- **longitude\_of\_central\_meridian**
- **latitude\_of\_projection\_origin**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

**Map coordinates:**

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute values **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

**Notes:**

Formulas for the mapping and its inverse along with notes on using the **PROJ** software package for doing the calculations may be found at <https://proj.org/operations/projections/tmerc.html> and [http://geotiff.maptools.org/proj\\_list/transverse\\_mercator.html](http://geotiff.maptools.org/proj_list/transverse_mercator.html).

## Vertical perspective

```
grid_mapping_name = vertical_perspective
```

**Map parameters:**

- **latitude\_of\_projection\_origin**
- **longitude\_of\_projection\_origin**
- **perspective\_point\_height**
- **false\_easting** - This parameter is optional (default is 0)
- **false\_northing** - This parameter is optional (default is 0)

**Map coordinates:**

The x (abscissa) and y (ordinate) rectangular coordinates are identified by the **standard\_name** attribute value **projection\_x\_coordinate** and **projection\_y\_coordinate** respectively.

**Notes:**

A general description of vertical perspective projection is given in [Snyder], pages 169-181.

The corresponding projection in PROJ is nsper. This should not be confused with the PROJ geos projection.

In the following table the "Type" values are **S** for string and **N** for numeric.

Table F.1. Grid Mapping Attributes

Attribute	Type	Description
<code>azimuth_of_central_line</code>	N	Specifies a horizontal angle measured in degrees clockwise from North. Used by certain projections (e.g., Oblique Mercator) to define the orientation of the map projection relative to a reference direction.
<code>crs_wkt</code>	S	This optional attribute may be used to specify multiple coordinate system properties in well-known text (WKT) format. The syntax must conform to the WKT format as specified in reference <a href="#">[OGC_WKT-CRS]</a> . Use of the <code>crs_wkt</code> attribute is described in section 5.6.1.
<code>earth_radius</code>	N	Used to specify the radius, in metres, of the spherical figure used to approximate the shape of the Earth. This attribute should be specified for those projected coordinate reference systems in which the X-Y cartesian coordinates have been derived using a spherical Earth approximation. If the cartesian coordinates were derived using an ellipsoid, this attribute should not be defined. Example: "6371007", which is the radius of the GRS 1980 Authalic Sphere.
<code>false_easting</code>	N	Applied to all abscissa values in the rectangular coordinates for a map projection in order to eliminate negative numbers. Expressed in the unit of the coordinate variable identified by the standard name <code>projection_x_coordinate</code> . If <code>false_easting</code> is not provided it is assumed to be 0. The formula to convert from the coordinate value as written in the <code>projection_x_coordinate</code> (xf) to a value (x0) used in a transformation without <code>false_easting</code> , i.e. <code>false_easting</code> = 0, is: $x_0 = x_f - \text{false\_easting}$
<code>false_northing</code>	N	Applied to all ordinate values in the rectangular coordinates for a map projection in order to eliminate negative numbers. Expressed in the unit of the coordinate variable identified by the standard name <code>projection_y_coordinate</code> . If <code>false_northing</code> is not provided it is assumed to be 0. The formula to convert from the coordinate value as written in the <code>projection_y_coordinate</code> (yf) to a value (y0) used in a transformation without <code>false_northing</code> , i.e. <code>false_northing</code> = 0, is: $y_0 = y_f - \text{false\_northing}$
<code>fixed_angle_axis</code>	S	Indicates the axis on which the view is fixed in a hypothetical gimbal view model of the Earth, as used in the geostationary grid mapping. It corresponds to the inner-gimbal axis of the gimbal view model, whose axis of rotation moves about the outer-gimbal axis. This value can adopt two values, "x" or "y", corresponding with the Earth's E-W or N-S axis, respectively. The counterpart to this attribute is <code>sweep_angle_axis</code> . If set to "x", <code>sweep_angle_axis</code> is "y", and vice versa. If one of the attributes <code>fixed_angle_axis</code> or <code>sweep_angle_axis</code> is provided, the other is not mandatory, as they can be used to infer each other.

Attribute	Type	Description
<code>geographic_crs_name</code>	S	The name of the geographic coordinate reference system. Corresponds to a OGC WKT GEOGCS node name.
<code>geoid_name</code>	S	The name of the estimate or model of the geoid being used as a datum, e.g. GEOID12B. Corresponds to an OGC WKT VERT_DATUM name. The geoid is the surface of constant geopotential that the ocean would follow if it were at rest. This attribute and <code>geopotential_datum_name</code> cannot both be specified.
<code>geopotential_datum_name</code>	S	The name of an estimated surface of constant geopotential being used as a datum, e.g. NAVD88. Such a surface is often called an equipotential surface in geodesy. Corresponds to an OGC WKT VERT_DATUM name. This attribute and <code>geoid_name</code> cannot both be specified.
<code>grid_mapping_name</code>	S	The name used to identify the grid mapping.
<code>grid_north_pole_latitude</code>	N	True latitude (degrees_north) of the north pole of the rotated grid.
<code>grid_north_pole_longitude</code>	N	True longitude (degrees_east) of the north pole of the rotated grid.
<code>horizontal_datum_name</code>	S	The name of the geodetic (horizontal) datum, which corresponds to the procedure used to measure positions on the surface of the Earth. Valid datum names and their associated parameters are given in <a href="https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements">https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements</a> (horiz_datum.csv, OGC_DATUM_NAME column) and are obtained by transforming the EPSG name using the following rules (used by OGR and Cadcorp): convert all non alphanumeric characters (including +) to underscores, then strip any leading, trailing or repeating underscores. This is to ensure that named datums can be correctly identified for precise datum transformations (see <a href="https://github.com/cf-convention/cf-conventions/wiki/OGC-WKT-Coordinate-System-Issues">https://github.com/cf-convention/cf-conventions/wiki/OGC-WKT-Coordinate-System-Issues</a> for more details). Corresponds to a OGC WKT DATUM node name.
<code>inverse_flattening</code>	N	Used to specify the <i>inverse</i> flattening ( $1/f$ ) of the ellipsoidal figure associated with the geodetic datum and used to approximate the shape of the Earth. The flattening ( $f$ ) of the ellipsoid is related to the semi-major and semi-minor axes by the formula $f = (a-b)/a$ . In the case of a spherical Earth this attribute should be omitted or set to zero. Example: 298.257222101 for the GRS 1980 ellipsoid. (Note: By convention the dimensions of an ellipsoid are specified using either the semi-major and semi-minor axis lengths, or the semi-major axis length and the inverse flattening. If all three attributes are specified then the supplied values must be consistent with the aforementioned formula.)

Attribute	Type	Description
<code>latitude_of_projection_origin</code>	N	The latitude (degrees_north) chosen as the origin of rectangular coordinates for a map projection. Domain: <code>-90.0 &lt;= latitude_of_projection_origin &lt;= 90.0</code>
<code>longitude_of_central_meridian</code>	N	The line of longitude (degrees_east) at the center of a map projection generally used as the basis for constructing the projection. Domain: <code>-180.0 &lt;= longitude_of_central_meridian &lt; 180.0</code>
<code>longitude_of_prime_meridian</code>	N	Specifies the longitude, with respect to Greenwich, of the prime meridian associated with the geodetic datum. The prime meridian defines the origin from which longitude values are determined. Not to be confused with the projection origin longitude (cf. <code>longitude_of_projection_origin</code> , a.k.a. central meridian) which defines the longitude of the map projection origin. Domain: <code>-180.0 &lt;= longitude_of_prime_meridian &lt; 180.0</code> decimal degrees. Default = <code>0.0</code>
<code>longitude_of_projection_origin</code>	N	The longitude (degrees_east) chosen as the origin of rectangular coordinates for a map projection. Domain: <code>-180.0 &lt;= longitude_of_projection_origin &lt; 180.0</code>
<code>north_pole_grid_longitude</code>	N	Longitude (degrees) of the true north pole in the rotated grid.
<code>perspective_point_height</code>	N	Records the height, <i>in metres</i> , of the map projection perspective point above the ellipsoid (or sphere). Used by perspective-type map projections, for example the Vertical Perspective Projection, which may be used to simulate the view from a Meteosat satellite.
<code>prime_meridian_name</code>	S	The name of the prime meridian associated with the geodetic datum. Valid names are given in <a href="https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements">https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements</a> (prime_meridian.csv). Corresponds to a OGC WKT PRIMEM node name.
<code>projected_crs_name</code>	S	The name of the projected coordinate reference system. Corresponds to a OGC WKT PROJCS node name.
<code>reference_ellipsoid_name</code>	S	The name of the reference ellipsoid. Valid names are given in <a href="https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements">https://github.com/cf-convention/cf-conventions/wiki/Mapping-from-CF-Grid-Mapping-Attributes-to-CRS-WKT-Elements</a> (ellipsoid.csv). Corresponds to a OGC WKT SPHEROID node name.
<code>scale_factor_at_central_meridian</code>	N	A multiplier for reducing a distance obtained from a map by computation or scaling to the actual distance along the central meridian. Domain: <code>scale_factor_at_central_meridian &gt; 0.0</code>
<code>scale_factor_at_projection_origin</code>	N	A multiplier for reducing a distance obtained from a map by computation or scaling to the actual distance at the projection origin. Domain: <code>scale_factor_at_projection_origin &gt; 0.0</code>

Attribute	Type	Description
<code>semi_major_axis</code>	N	Specifies the length, <i>in metres</i> , of the semi-major axis of the ellipsoidal figure associated with the geodetic datum and used to approximate the shape of the Earth. Commonly denoted using the symbol <i>a</i> . In the case of a spherical Earth approximation this attribute defines the radius of the Earth. See also the <code>inverse_flattening</code> attribute.
<code>semi_minor_axis</code>	N	Specifies the length, <i>in metres</i> , of the semi-minor axis of the ellipsoidal figure associated with the geodetic datum and used to approximate the shape of the Earth. Commonly denoted using the symbol <i>b</i> . In the case of a spherical Earth approximation this attribute should be omitted (the preferred option) or else set equal to the value of the <code>semi_major_axis</code> attribute. See also the <code>inverse_flattening</code> attribute.
<code>standard_parallel</code>	N	Specifies the line, or lines, of latitude at which the developable map projection surface (plane, cone, or cylinder) touches the reference sphere or ellipsoid used to represent the Earth. Since there is zero scale distortion along a standard parallel it is also referred to as a "latitude of true scale". In the situation where a conical developable surface intersects the reference ellipsoid there are two standard parallels, in which case this attribute can be used as a vector to record both latitude values, with the additional convention that the standard parallel nearest the pole (N or S) is provided first. Domain: <code>-90.0 &lt;= standard_parallel &lt;= 90.0</code>
<code>straight_vertical_longitude_from_pole</code>	N	The longitude (degrees_east) to be oriented straight up from the North or South Pole. Domain: <code>-180.0 &lt;= straight_vertical_longitude_from_pole &lt; 180.0</code>
<code>`sweep_angle_axis`</code>	S	Indicates the axis on which the view sweeps in a hypothetical gimbal view model of the Earth, as used in the geostationary grid mapping. It corresponds to the outer-gimbal axis of the gimbal view model, about whose axis of rotation the gimbal-gimbal axis moves. This value can adopt two values, "x" or "y", corresponding with the Earth's E-W or N-S axis, respectively. The counterpart to this attribute is <code>fixed_angle_axis</code> . If set to "x", <code>fixed_angle_axis</code> is "y", and vice versa. If one of the attributes <code>fixed_angle_axis</code> or <code>sweep_angle_axis</code> is provided, the other is not mandatory, as they can be used to infer each other.
<code>tows84</code>	N	This indicates a list of up to 7 Bursa Wolf transformation parameters., which can be used to approximate a transformation from the horizontal datum to the WGS84 datum. More precise datum transformations can be done with datum shift grids. Represented as a double-precision array, with 3, 6 or 7 values (if there are less than 7 values the remaining are considered to be zero). Corresponds to a OGC WKT TOWGS84 node.

## Notes:

1. The various **\*\_name** attributes are optional but recommended when known as they allow for a better description and interoperability with WKT definitions.
2. **reference\_ellipsoid\_name**, **prime\_meridian\_name**, **horizontal\_datum\_name** and **geographic\_crs\_name** must be all defined if any one is defined, and if **projected\_crs\_name** is defined then **geographic\_crs\_name** must be also.

# Appendix G: Revision History

The content in this appendix has moved to [Revision History](#).



# Appendix H: Annotated Examples of Discrete Geometries

## H.1. Point Data

To represent data at scattered locations and times with no implied relationship among of coordinate positions, both data and coordinates must share the same (sample) instance dimension. Because each feature contains only a single data element, there is no need for a separate element dimension. The representation of point features is a special, degenerate case of the standard four representations. The **coordinates** attribute is used on the data variables to unambiguously identify the relevant space and time auxiliary coordinate variables.

```
dimensions:
  obs = 1234 ;

variables:
  double time(obs) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(obs) ;
    lon:standard_name = "longitude";
    lon:long_name = "longitude of the observation";
    lon:units = "degrees_east";
  float lat(obs) ;
    lat:standard_name = "latitude";
    lat:long_name = "latitude of the observation" ;
    lat:units = "degrees_north" ;
  float alt(obs) ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";

  float humidity(obs) ;
    humidity:standard_name = "specific_humidity" ;
    humidity:coordinates = "time lat lon alt" ;
  float temp(obs) ;
    temp:standard_name = "air_temperature" ;
    temp:units = "Celsius" ;
    temp:coordinates = "time lat lon alt" ;

attributes:
  :featureType = "point";
```

In this example, the humidity(i) and temp(i) data are associated with the coordinate values time(i), lat(i), lon(i), and alt(i). The obs dimension may optionally be the netCDF unlimited dimension of the netCDF file.

## H.2. Time Series Data

Data may be taken over periods of time at a set of discrete point, spatial locations called stations (see also discussion in 9.1). The set of elements at a particular station is referred to as a timeSeries feature and a data variable may contain a collection of such features. The instance dimension in the case of timeSeries specifies the number of time series in the collection and is also referred to as the station dimension. The instance variables, which have just this dimension, including latitude and longitude for example, are also referred to as station variables and are considered to contain

information describing the stations. The station variables may contain missing values, allowing one to reserve space for additional stations that may be added at a later time, as discussed in section 9.6. In addition,

- It is strongly recommended that there should be a station variable (which may be of any type) with the attribute `cf_role=timeseries_id`, whose values uniquely identify the stations.
- It is recommended that there should be station variables with `standard_name` attributes "`platform_name`", "`surface_altitude`" and "`platform_id`" when applicable.

All the representations described in section 9.3 can be used for time series. The global attribute `featureType=timeSeries` (case-insensitive) must be included.

### H.2.1. Orthogonal multidimensional array representation of time series

If the time series instances have the same number of elements and the time values are identical for all instances, you may use the orthogonal multidimensional array representation. This has either a one-dimensional coordinate variable, `time(time)`, provided the time values are ordered monotonically, or a one-dimensional auxiliary coordinate variable, `time(o)`, where `o` is the element dimension. In the former case, listing the time variable in the `coordinates` attributes of the data variables is optional.

*Example H.2. Timeseries with common element times in a time coordinate variable using the orthogonal multidimensional array representation.*

```
dimensions:
  station = 10 ; // measurement locations
  time = UNLIMITED ;

variables:
  float humidity(station,time) ;
    humidity:standard_name = "specific humidity" ;
    humidity:coordinates = "lat lon alt station_name" ;
    humidity:_FillValue = -999.9f;
  double time(time) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(station) ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt(station) ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";
  string station_name(station) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";
attributes:
  :featureType = "timeSeries";
```

In this example, `humidity(i,o)` is element `o` of time series `i`, and associated with the coordinate values `time(o)`, `lat(i)`, and `lon(i)`. Either the instance (station) or the element (time) dimension may optionally be the netCDF unlimited dimension.

## H.2.2. Incomplete multidimensional array representation of time series

Much of the simplicity of the orthogonal multidimensional representation can be preserved even in cases where individual time series have different time coordinate values. All time series must be allocated the amount of storage needed by the longest, so the use of this representation will trade off simplicity against storage space in some cases.

```
dimensions:
  station = UNLIMITED ;
  obs = 13 ;
  name_strlen = 23 ;

variables:
  float lon(station) ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt(station) ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";
  char station_name(station, name_strlen) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";
  int station_info(station) ;
    station_info:long_name = "any kind of station info" ;
  float station_elevation(station) ;
    station_elevation:long_name = "height above the geoid" ;
    station_elevation:standard_name = "surface_altitude" ;
    station_elevation:units = "m";

  double time(station, obs) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
    time:missing_value = -999.9;
  float humidity(station, obs) ;
    humidity:standard_name = "specific_humidity" ;
    humidity:coordinates = "time lat lon alt station_name" ;
    humidity:_FillValue = -999.9f;
  float temp(station, obs) ;
    temp:standard_name = "air_temperature" ;
    temp:units = "Celsius" ;
    temp:coordinates = "time lat lon alt station_name" ;
    temp:_FillValue = -999.9f;

attributes:
  :featureType = "timeSeries";
```

In this example, the humidity(i,o) and temp(i,o) data for element o of time series i are associated with the coordinate values time(i,o), lat(i), lon(i) and alt(i). Either the instance (station) dimension or the element (obs) dimension could be the unlimited dimension of a netCDF file. Any unused elements of the data and auxiliary coordinate variables must contain the missing data flag value(section 9.6).

### **H.2.3. Single time series, including deviations from a nominal fixed spatial location**

When the intention of a data variable is to contain only a single time series, the preferred encoding is a special case of the multidimensional array representation.

*Example H.4. A single timeseries.*

```
dimensions:
  time = 100233 ;

variables:
  float lon ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";
  string station_name ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";

double time(time) ;
  time:standard_name = "time";
  time:long_name = "time of measurement" ;
  time:units = "days since 1970-01-01 00:00:00" ;
  time:missing_value = -999.9;
float humidity(time) ;
  humidity:standard_name = "specific_humidity" ;
  humidity:coordinates = "time lat lon alt station_name" ;
  humidity:_FillValue = -999.9f;
float temp(time) ;
  temp:standard_name = "air_temperature" ;
  temp:units = "Celsius" ;
  temp:coordinates = "time lat lon alt station_name" ;
  temp:_FillValue = -999.9f;

attributes:
  :featureType = "timeSeries";
```

While an idealized time series is defined at a single, stable point location, there are examples of time series, such as cabled ocean surface mooring measurements, in which the precise position of the observations varies slightly from a nominal fixed point. In the following example we show how the spatial positions of such a time series should be encoded in CF. Note that although this example shows only a single time series, the technique is applicable to all of the representations.

```
dimensions:
  time = 100233 ;
  name_strlen = 23 ;

variables:
  float lon ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
    lon:axis = "X";
  float lat ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
    lat:axis = "Y" ;
  float precise_lon (time);
    precise_lon:standard_name = "longitude";
    precise_lon:long_name = "station longitude";
    precise_lon:units = "degrees_east";
  float precise_lat (time);
    precise_lat:standard_name = "latitude";
    precise_lat:long_name = "station latitude" ;
    precise_lat:units = "degrees_north" ;
  float alt ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";
  char station_name(name_strlen) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";

  double time(time) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
    time:missing_value = -999.9;
  float humidity(time) ;
    humidity:standard_name = "specific_humidity" ;
    humidity:coordinates = "time lat lon alt precise_lon precise_lat
station_name" ;
    humidity:_FillValue = -999.9f;
  float temp(time) ;
    temp:standard_name = "air_temperature" ;
    temp:units = "Celsius" ;
    temp:coordinates = "time lat lon alt precise_lon precise_lat
station_name" ;
```



```
temp:_FillValue = -999.9f;  
  
attributes:  
  :featureType = "timeSeries";
```

#### **H.2.4. Contiguous ragged array representation of time series**

When the time series have different lengths and the data values for entire time series are available to be written in a single operation, the contiguous ragged array representation is efficient.

```
dimensions:
  station = 23 ;
  obs = 1234 ;

variables:
  float lon(station) ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt(station) ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";
  string station_name(station) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";
  int station_info(station) ;
    station_info:long_name = "some kind of station info" ;
  int row_size(station) ;
    row_size:long_name = "number of observations for this station " ;
    row_size:sample_dimension = "obs" ;

  double time(obs) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float humidity(obs) ;
    humidity:standard_name = "specific_humidity" ;
    humidity:coordinates = "time lat lon alt station_name" ;
    humidity:_FillValue = -999.9f;
  float temp(obs) ;
    temp:standard_name = "air_temperature" ;
    temp:units = "Celsius" ;
    temp:coordinates = "time lat lon alt station_name" ;
    temp:_FillValue = -999.9f;

attributes:
  :featureType = "timeSeries";
```

The data humidity(o) and temp(o) are associated with the coordinate values time(o), lat(i), lon(i), and alt(i), where i indicates which time series. Time series i comprises the data elements

from

```
rowStart(i) to rowStart(i) + row_size(i) - 1
```

where

```
rowStart(i) = 0 if i = 0  
rowStart(i) = rowStart(i-1) + row_size(i-1) if i > 0
```

The variable, **row\_size**, is the count variable containing the length of each time series feature. It is identified by having an attribute with name **sample\_dimension** whose value is name of the sample dimension (**obs** in this example). The sample dimension could optionally be the netCDF unlimited dimension. The variable bearing the **sample\_dimension** attribute must have the instance dimension (**station** in this example) as its single dimension, and must have an integer type. This variable implicitly partitions into individual instances all variables that have the sample dimension. The auxiliary coordinate variables **lat**, **lon**, **alt** and **station\_name** are station variables.

## H.2.5. Indexed ragged array representation of time series

When time series with different lengths are written incrementally, the indexed ragged array representation is efficient.

```
dimensions:
  station = 23 ;
  obs = UNLIMITED ;
  name_strlen = 23 ;

variables:
  float lon(station) ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt(station) ;
    alt:long_name = "vertical distance above the surface" ;
    alt:standard_name = "height" ;
    alt:units = "m";
    alt:positive = "up";
    alt:axis = "Z";
  char station_name(station, name_strlen) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";
  int station_info(station) ;
    station_info:long_name = "some kind of station info" ;

  int stationIndex(obs) ;
    stationIndex:long_name = "which station this obs is for" ;
    stationIndex:instance_dimension= "station" ;
  double time(obs) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float humidity(obs) ;
    humidity:standard_name = "specific_humidity" ;
    humidity:coordinates = "time lat lon alt station_name" ;
    humidity:_FillValue = -999.9f;
  float temp(obs) ;
    temp:standard_name = "air_temperature" ;
    temp:units = "Celsius" ;
    temp:coordinates = "time lat lon alt station_name" ;
    temp:_FillValue = -999.9f;

attributes:
  :featureType = "timeSeries";
```

The humidity(o) and temp(o) data are associated with the coordinate values time(o), lat(i),

lon(i), and alt(i), where  $i = \text{stationIndex}(o)$  is a zero-based index indicating which time series. Thus, time(0), humidity(0) and temp(0) belong to the element of the **station** dimension that is indicated by **stationIndex(0)** ; time(1), humidity(1) and temp(1) belong to element **stationIndex(1)** of the **station** dimension, etc.

The variable, **stationIndex** , is identified as the index variable by having an attribute with name of **instance\_dimension** whose value is the instance dimension ( **station** in this example). The variable bearing the **instance\_dimension** attribute must have the sample dimension ( **obs** in this example) as its single dimension, and must have an integer type. This variable implicitly assigns the station to each value of any variable having the sample dimension. The sample dimension need not be the netCDF unlimited dimension, though it commonly is.

## H.3. Profile Data

A series of connected observations along a vertical line, like an atmospheric or ocean sounding, is called a profile. For each profile, there is a single time, lat and lon. A data variable may contain a collection of profile features. The instance dimension in the case of profiles specifies the number of profiles in the collection and is also referred to as the **profile dimension** . The instance variables, which have just this dimension, including latitude and longitude for example, are also referred to as **profile variables** and are considered to be information about the profiles. It is strongly recommended that there always be a profile variable (of any data type) with **cf\_role** attribute "**profile\_id**", whose values uniquely identify the profiles. The profile variables may contain missing values. This allows one to reserve space for additional profiles that may be added at a later time, as discussed in section 9.6. All the representations described in section 9.1.3 can be used for profiles. The global attribute **featureType=profile** (case-insensitive) should be included if all data variables in the file contain profiles.

### H.3.1. Orthogonal multidimensional array representation of profiles

If the profile instances have the same number of elements and the vertical coordinate values are identical for all instances, you may use the orthogonal multidimensional array representation. This has either a one-dimensional coordinate variable,  $z(z)$ , provided the vertical coordinate values are ordered monotonically, or a one-dimensional auxiliary coordinate variable, alt(o), where o is the element dimension. In the former case, listing the vertical coordinate variable in the **coordinates** attributes of the data variables is optional.

*Example H.8. Atmospheric sounding profiles for a common set of vertical coordinates stored in the orthogonal multidimensional array representation.*



```

dimensions:
  z = 42 ;
  profile = 142 ;

variables:
  int profile(profile) ;
    profile:cf_role = "profile_id";
  double time(profile);
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(profile);
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(profile);
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;

  float z(z) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float pressure(profile, z) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat z" ;

  float temperature(profile, z) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat z" ;

  float humidity(profile, z) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
    humidity:coordinates = "time lon lat z" ;

attributes:
  :featureType = "profile";

```

The pressure(i,o), temperature(i,o), and humidity(i,o) data for element o of profile i are associated with the coordinate values time(i), lat(i), and lon(i). The vertical coordinate for

element  $o$  in each profile is altitude  $z(o)$ . Either the instance (profile) or the element ( $z$ ) dimension could be the netCDF unlimited dimension.

### H.3.2. Incomplete multidimensional array representation of profiles

If there are the same number of levels in each profile, but they do not have the same set of vertical coordinates, one can use the incomplete multidimensional array representation, which the vertical coordinate variable is two-dimensional e.g. replacing  $z(z)$  in [Example H.8, "Atmospheric sounding profiles for a common set of vertical coordinates stored in the orthogonal multidimensional array representation."](#) with  $\text{alt}(\text{profile}, z)$ . This representation also allows one to have a variable number of elements in different profiles, at the cost of some wasted space. In that case, any unused elements of the data and auxiliary coordinate variables must contain missing data values (section 9.6).

### H.3.3. Single profile

When a single profile is stored in a file, there is no need for the profile dimension; the data arrays are one-dimensional. This is a special case of the orthogonal multidimensional array representation (9.3.1).



*Example H.9. Data from a single atmospheric sounding profile.*

```
dimensions:
  z = 42 ;

variables:
  int profile ;
    profile:cf_role = "profile_id";

  double time;
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon;
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat;
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;

  float z(z) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float pressure(z) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat z" ;

  float temperature(z) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat z" ;

  float humidity(z) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
    humidity:coordinates = "time lon lat z" ;

attributes:
  :featureType = "profile";
```

The pressure(o), temperature(o), and humidity(o) data is associated with the coordinate values time, z(o), lat, and lon. The profile variables time, lat and lon, shown here as scalar, could alternatively be one-dimensional time(profile), lat(profile), lon(profile) if a size-one profile dimension were retained in the file.

### **H.3.4. Contiguous ragged array representation of profiles**

When the number of vertical levels for each profile varies, and one can control the order of writing, one can use the contiguous ragged array representation. The canonical use case for this is when rewriting raw data, and you expect that the common read pattern will be to read all the data from each profile.

*Example H.10. Atmospheric sounding profiles for a common set of vertical coordinates stored in the contiguous ragged array representation.*



```

dimensions:
  obs = UNLIMITED ;
  profile = 142 ;

variables:
  int profile(profile) ;
    profile:cf_role = "profile_id";
  double time(profile);
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(profile);
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(profile);
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  int rowSize(profile) ;
    rowSize:long_name = "number of obs for this profile " ;
    rowSize:sample_dimension = "obs" ;

  float z(obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float pressure(obs) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat z" ;

  float temperature(obs) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat z" ;

  float humidity(obs) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
    humidity:coordinates = "time lon lat z" ;

attributes:
  :featureType = "profile";

```

The pressure(o), temperature(o), and humidity(o) data is associated with the coordinate values time(i), z(o), lat(i), and lon(i), where i indicates which profile. All elements for one profile are contiguous along the sample dimension. The sample dimension (obs) may be the unlimited dimension or not. All variables that have the instance dimension (profile) as their single dimension are considered to be information about the profiles.

The count variable (row\_size) contains the number of elements for each profile, and is identified by having an attribute with name "sample\_dimension" whose value is the sample dimension being counted. It must have the profile dimension as its single dimension, and must have an integer type. The elements are associated with the profile using the same algorithm as in H.2.4.

### **H.3.5. Indexed ragged array representation of profiles**

When the number of vertical levels for each profile varies, and one cannot write them contiguously, one can use the indexed ragged array representation. The canonical use case is when writing real-time data streams that contain reports from many profiles, arriving randomly. If the sample dimension is the unlimited dimension, this allows data to be appended to the file.

*Example H.11. Atmospheric sounding profiles for a common set of vertical coordinates stored in the indexed ragged array representation.*

```
dimensions:
  obs = UNLIMITED ;
  profile = 142 ;

variables:
  int profile(profile) ;
    profile:cf_name = "profile_id";
  double time(profile);
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(profile);
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(profile);
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;

  int parentIndex(obs) ;
    parentIndex:long_name = "index of profile " ;
    parentIndex:instance_dimension= "profile" ;

  float z(obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float pressure(obs) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat z" ;

  float temperature(obs) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat z" ;

  float humidity(obs) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
```

```
humidity:coordinates = "time lon lat z" ;  
  
attributes:  
  :featureType = "profile";
```

The pressure(o), temperature(o), and humidity(o) data are associated with the coordinate values time(i), z(o), lat(i), and lon(i), where i indicates which profile. The sample dimension (obs) may be the unlimited dimension or not. The profile index variable (parentIndex) is identified by having an attribute with name of "instance\_dimension" whose value is the profile dimension name. It must have the sample dimension as its single dimension, and must have an integer type. Each value in the profile index variable is the zero-based profile index that the element belongs to. The elements are associated with the profiles using the same algorithm as in H.2.5.

## H.4. Trajectory Data

Data may be taken along discrete paths through space, each path constituting a connected set of points called a trajectory, for example along a flight path, a ship path or the path of a parcel in a Lagrangian calculation. A data variable may contain a collection of trajectory features. The instance dimension in the case of trajectories specifies the number of trajectories in the collection and is also referred to as the **trajectory dimension**. The instance variables, which have just this dimension, are also referred to as **trajectory variables** and are considered to be information about the trajectories. It is strongly recommended that there always be a trajectory variable (of any data type) with the attribute `cf_role=trajectory_id` attribute, whose values uniquely identify the trajectories. The trajectory variables may contain missing values. This allows one to reserve space for additional trajectories that may be added at a later time, as discussed in section 9.6. All the representations described in section 9.3 can be used for trajectories. The global attribute `featureType=trajectory` (case-insensitive) should be included if all data variables in the file contain trajectories.

### H.4.1. Multidimensional array representation of trajectories

When storing multiple trajectories in the same file, and the number of elements in each trajectory is the same, one can use the multidimensional array representation. This representation also allows one to have a variable number of elements in different trajectories, at the cost of some wasted space. In that case, any unused elements of the data and auxiliary coordinate variables must contain missing data values (section 9.6).

*Example H.12. Trajectories recording atmospheric composition in the incomplete multidimensional array representation.*

```
dimensions:
  obs = 1000 ;
  trajectory = 77 ;

variables:
  string trajectory(trajectory) ;
    trajectory:cf_role = "trajectory_id";
    trajectory:long_name = "trajectory name" ;
  int trajectory_info(trajectory) ;
    trajectory_info:long_name = "some kind of trajectory info"

  double time(trajectory, obs) ;
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(trajectory, obs) ;
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(trajectory, obs) ;
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;

  float z(trajectory, obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float O3(trajectory, obs) ;
    O3:standard_name = "mass_fraction_of_ozone_in_air";
    O3:long_name = "ozone concentration" ;
    O3:units = "1e-9" ;
    O3:coordinates = "time lon lat z" ;

  float NO3(trajectory, obs) ;
    NO3:standard_name = "mass_fraction_of_nitrate_radical_in_air";
    NO3:long_name = "NO3 concentration" ;
    NO3:units = "1e-9" ;
    NO3:coordinates = "time lon lat z" ;

attributes:
  :featureType = "trajectory";
```



The NO<sub>3</sub>(i,o) and O<sub>3</sub>(i,o) data for element o of trajectory i are associated with the coordinate values time(i,o), lat(i,o), lon(i,o), and z(i,o). Either the instance (trajectory) or the element (obs) dimension could be the netCDF unlimited dimension. All variables that have trajectory as their only dimension are considered to be information about that trajectory.

If the trajectories all have the same set of times, the time auxiliary coordinate variable could be one-dimensional time(obs), or replaced by a one-dimensional coordinate variable time(time), where the size of the time dimension is now equal to the number of elements of each trajectory. In the latter case, listing the time coordinate variable in the coordinates attribute is optional.

#### **H.4.2. Single trajectory**

When a single trajectory is stored in the data variable, there is no need for the trajectory dimension and the arrays are one-dimensional. This is a special case of the multidimensional array representation.

```
dimensions:
  time = 42;
  name_strlen = 23 ;

variables:
  char trajectory(name_strlen) ;
    trajectory:cf_role = "trajectory_id";

  double time(time) ;
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(time) ;
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(time) ;
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  float z(time) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float O3(time) ;
    O3:standard_name = "mass_fraction_of_ozone_in_air";
    O3:long_name = "ozone concentration" ;
    O3:units = "1e-9" ;
    O3:coordinates = "time lon lat z" ;

  float NO3(time) ;
    NO3:standard_name = "mass_fraction_of_nitrate_radical_in_air";
    NO3:long_name = "NO3 concentration" ;
    NO3:units = "1e-9" ;
    NO3:coordinates = "time lon lat z" ;

attributes:
  :featureType = "trajectory";
```

The NO3(o) and O3(o) data are associated with the coordinate values time(o), z(o), lat(o), and lon(o). In this example, the time coordinate is ordered, so time values are contained in a coordinate variable i.e. time(time) and time is the element dimension. The time dimension may be unlimited or not.

Note that structurally this looks like unconnected point data as in example 9.5. The presence of the `featureType = "trajectory"` global attribute indicates that in fact the points are connected along a trajectory.

### **H.4.3. Contiguous ragged array representation of trajectories**

When the number of elements for each trajectory varies, and one can control the order of writing, one can use the contiguous ragged array representation. The canonical use case for this is when rewriting raw data, and you expect that the common read pattern will be to read all the data from each trajectory.

*Example H.14. Trajectories recording atmospheric composition in the contiguous ragged array representation.*

```
dimensions:
  obs = 3443;
  trajectory = 77 ;

variables:
  string trajectory(trajectory) ;
    trajectory:cf_role = "trajectory_id";
  int rowSize(trajectory) ;
    rowSize:long_name = "number of obs for this trajectory " ;
    rowSize:sample_dimension = "obs" ;

  double time(obs) ;
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(obs) ;
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(obs) ;
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  float z(obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float O3(obs) ;
    O3:standard_name = "mass_fraction_of_ozone_in_air";
    O3:long_name = "ozone concentration" ;
    O3:units = "1e-9" ;
    O3:coordinates = "time lon lat z" ;

  float NO3(obs) ;
    NO3:standard_name = "mass_fraction_of_nitrate_radical_in_air";
    NO3:long_name = "NO3 concentration" ;
    NO3:units = "1e-9" ;
    NO3:coordinates = "time lon lat z" ;

attributes:
  :featureType = "trajectory";
```

The O3(o) and NO3(o) data are associated with the coordinate values time(o), lat(o), lon(o), and

alt(o). All elements for one trajectory are contiguous along the sample dimension. The sample dimension (obs) may be the unlimited dimension or not. All variables that have the instance dimension (trajectory) as their single dimension are considered to be information about that trajectory.

The count variable (row\_size) contains the number of elements for each trajectory, and is identified by having an attribute with name "sample\_dimension" whose value is the sample dimension being counted. It must have the trajectory dimension as its single dimension, and must have an integer type. The elements are associated with the trajectories using the same algorithm as in H.2.4.

#### **H.4.4. Indexed ragged array representation of trajectories**

When the number of elements at each trajectory vary, and the elements cannot be written in order, one can use the indexed ragged array representation. The canonical use case is when writing real-time data streams that contain reports from many trajectories. The data can be written as it arrives; if the flatsample dimension is the unlimited dimension, this allows data to be appended to the file.

```
dimensions:
  obs = UNLIMITED ;
  trajectory = 77 ;
  name_strlen = 23 ;

variables:
  char trajectory(trajectory, name_strlen) ;
    trajectory:cf_role = "trajectory_id";

  int trajectory_index(obs) ;
    trajectory_index:long_name = "index of trajectory this obs belongs to "
;
    trajectory_index:instance_dimension= "trajectory" ;
  double time(obs) ;
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(obs) ;
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(obs) ;
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  float z(obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float O3(obs) ;
    O3:standard_name = "mass_fraction_of_ozone_in_air";
    O3:long_name = "ozone concentration" ;
    O3:units = "1e-9" ;
    O3:coordinates = "time lon lat z" ;

  float NO3(obs) ;
    NO3:standard_name = "mass_fraction_of_nitrate_radical_in_air";
    NO3:long_name = "NO3 concentration" ;
    NO3:units = "1e-9" ;
    NO3:coordinates = "time lon lat z" ;

attributes:
  :featureType = "trajectory";
```

The O3(o) and NO3(o) data are associated with the coordinate values time(o), lat(o), lon(o), and alt(o). All elements for one trajectory will have the same trajectory index value. The sample dimension (obs) may be the unlimited dimension or not.

The index variable (trajectory\_index) is identified by having an attribute with name of "instance\_dimension" whose value is the trajectory dimension name. It must have the sample dimension as its single dimension, and must have an integer type. Each value in the trajectory\_index variable is the zero-based trajectory index that the element belongs to. The elements are associated with the trajectories using the same algorithm as in H.2.5.

## H.5. Time Series of Profiles

When profiles are taken repeatedly at a station, one gets a time series of profiles (see also section H.2 for discussion of stations and time series). The resulting collection of profiles is called a timeSeriesProfile. A data variable may contain a collection of such timeSeriesProfile features, one feature per station. The instance dimension in the case of a timeSeriesProfile is also referred to as the **station dimension**. The instance variables, which have just this dimension, including latitude and longitude for example, are also referred to as **station variables** and are considered to contain information describing the stations. The station variables may contain missing values. This allows one to reserve space for additional stations that may be added at a later time, as discussed in section 9.6. In addition,

- It is strongly recommended that there should be a station variable (which may be of any type) with **cf\_role** attribute "**timeseries\_id**", whose values uniquely identify the stations.
- It is recommended that there should be station variables with standard\_name attributes "**platform\_name**", "**surface\_altitude**" and "**platform\_id**" when applicable.

TimeSeriesProfiles are more complicated than timeSeries because there are two element dimensions (profile and vertical). Each time series has a number of profiles from different times as its elements, and each profile has a number of data from various levels as its elements. It is strongly recommended that there always be a variable (of any data type) with the profile dimension and the **cf\_role** attribute "**profile\_id**", whose values uniquely identify the profiles.

### H.5.1. Multidimensional array representations of time series profiles

When storing time series of profiles at multiple stations in the same data variable, if there are the same number of time points for all timeSeries, and the same number of vertical levels for every profile, one can use the multidimensional array representation:

*Example H.16. Time series of atmospheric sounding profiles from a set of locations stored in a multidimensional array representation.*

```
dimensions:
  station = 22 ;
  profile = 3002 ;
  z = 42 ;

variables:
  float lon(station) ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  string station_name(station) ;
    station_name:cf_role = "timeseries_id" ;
    station_name:long_name = "station name" ;
  int station_info(station) ;
    station_info:long_name = "some kind of station info" ;

  float alt(station, profile , z) ;
    alt:standard_name = "altitude";
    alt:long_name = "height above mean sea level" ;
    alt:units = "km" ;
    alt:positive = "up" ;
    alt:axis = "Z" ;

  double time(station, profile ) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
    time:missing_value = -999.9;

  float pressure(station, profile , z) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat alt station_name" ;

  float temperature(station, profile , z) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat alt station_name" ;

  float humidity(station, profile , z) ;
    humidity:standard_name = "relative_humidity" ;
```



```
humidity:long_name = "relative humidity" ;
humidity:units = "%" ;
humidity:coordinates = "time lon lat alt station_name" ;
```

```
attributes:
  :featureType = "timeSeriesProfile";
```

The pressure(i,p,o), temperature(i,p,o), and humidity(i,p,o) data for element o of profile p at station i are associated with the coordinate values time(i,p), z(i,p,o), lat(i), and lon(i). Any of the three dimensions could be the netCDF unlimited dimension, if it might be useful to be able to enlarge it.

If all of the profiles at any given station have the same set of vertical coordinate values, the vertical auxiliary coordinate variable could be dimensioned alt(station, z). If all the profiles have the same set of vertical coordinates, the vertical auxiliary coordinate variable could be one-dimensional alt(z), or replaced by a one-dimensional coordinate variable z(z), provided the values are ordered monotonically. In the latter case, listing the vertical coordinate variable in the coordinates attribute is optional.

If the profiles are taken at all stations at the same set of times, the time auxiliary coordinate variable could be one-dimensional time(profile), or replaced by a one-dimensional coordinate variable time(time), where the size of the time dimension is now equal to the number of profiles at each station. In the latter case, listing the time coordinate variable in the coordinates attribute is optional.

If there is only a single set of levels and a single set of times, the multidimensional array representation is formally orthogonal:

*Example H.17. Time series of atmospheric sounding profiles from a set of locations stored in an orthogonal multidimensional array representation.*

```
dimensions:
  station = 10 ; // measurement locations
  pressure = 11 ; // pressure levels
  time = UNLIMITED ;
variables:
  float humidity(time,pressure,station) ;
    humidity:standard_name = "specific_humidity" ;
    humidity:coordinates = "lat lon" ;
  double time(time) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(station) ;
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float pressure(pressure) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure" ;
    pressure:units = "hPa" ;
    pressure:axis = "Z" ;
```

**humidity(p,o,i)** is associated with the coordinate values **time(p)** , **pressure(o)** , **lat(i)** , and **lon(i)** . The number of profiles equals the number of times.

At the cost of some wasted space, the multidimensional array representation also allows one to have a variable number of profiles for different stations, and varying numbers of levels for different profiles. In these cases, any unused elements of the data and auxiliary coordinate variables must contain missing data values (section 9.6).

## H.5.2. Time series of profiles at a single station

If there is only one station in the data variable, there is no need for the station dimension:

*Example H.18. Time series of atmospheric sounding profiles from a single location stored in a multidimensional array representation.*

```
dimensions:
  profile = 30 ;
  z = 42 ;
  name_strlen = 23 ;

variables:
  float lon ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  char station_name(name_strlen) ;
    station_name:cf_role = "timeseries_id" ;
    station_name:long_name = "station name" ;
  int station_info;
    station_info:long_name = "some kind of station info" ;

  float alt(profile , z) ;
    alt:standard_name = "altitude";
    alt:long_name = "height above mean sea level" ;
    alt:units = "km" ;
    alt:axis = "Z" ;
    alt:positive = "up" ;

  double time(profile ) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
    time:missing_value = -999.9;

  float pressure(profile , z) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat alt station_name" ;

  float temperature(profile , z) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat alt station_name" ;

  float humidity(profile , z) ;
    humidity:standard_name = "relative_humidity" ;
```

```
humidity:long_name = "relative humidity" ;
humidity:units = "%" ;
humidity:coordinates = "time lon lat alt station_name" ;
```

```
attributes:
  :featureType = "timeSeriesProfile";
```

The pressure(p,o), temperature(p,o), and humidity(p,o) data for element o of profile p are associated with the coordinate values time(p), alt(p,o), lat, and lon. If all the profiles have the same set of vertical coordinates, the vertical auxiliary coordinate variable could be one-dimensional alt(z), or replaced by a one-dimensional coordinate variable z(z), provided the values are ordered monotonically. In the latter case, listing the vertical coordinate variable in the coordinates attribute is optional.

### H.5.3. Ragged array representation of time series profiles

When the number of profiles and levels for each station varies, one can use a ragged array representation. Each of the two element dimensions (time and vertical) could in principle be stored either contiguous or indexed, but this convention supports only one of the four possible choices. This uses the contiguous ragged array representation for each profile (9.5.43.3), and the indexed ragged array representation to organise the profiles into time series (9.3.54). The canonical use case is when writing real-time data streams that contain profiles from many stations, arriving randomly, with the data for each entire profile written all at once.

*Example H.19. Time series of atmospheric sounding profiles from a set of locations stored in a ragged array representation.*

```
dimensions:
  obs = UNLIMITED ;
  profiles = 1420 ;
  stations = 42;

variables:
  float lon(station) ;
    lon:standard_name = "longitude";
    lon:long_name = "station longitude";
    lon:units = "degrees_east";
  float lat(station) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;
  float alt(station) ;
    alt:long_name = "altitude above MSL" ;
    alt:units = "m" ;
  string station_name(station) ;
    station_name:long_name = "station name" ;
    station_name:cf_role = "timeseries_id";
  int station_info(station) ;
    station_info:long_name = "some kind of station info" ;

  int profile(profile) ;
    profile:cf_role = "profile_id";
  double time(profile);
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  int station_index(profile) ;
    station_index:long_name = "which station this profile is for" ;
    station_index:instance_dimension = "station" ;
  int row_size(profile) ;
    row_size:long_name = "number of obs for this profile " ;
    row_size:sample_dimension = "obs" ;

  float z(obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:axis = "Z" ;
    z:positive = "up" ;

  float pressure(obs) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
```

```

pressure:coordinates = "time lon lat z station_name" ;

float temperature(obs) ;
  temperature:standard_name = "surface_temperature" ;
  temperature:long_name = "skin temperature" ;
  temperature:units = "Celsius" ;
  temperature:coordinates = "time lon lat z station_name" ;

float humidity(obs) ;
  humidity:standard_name = "relative_humidity" ;
  humidity:long_name = "relative humidity" ;
  humidity:units = "%" ;
  humidity:coordinates = "time lon lat z station_name" ;

attributes:
  :featureType = "timeSeriesProfile";

```

The pressure(o), temperature(o), and humidity(o) data for element o of profile p at station i are associated with the coordinate values time(p), z(o), lat(i), and lon(i).

The index variable (station\_index) is identified by having an attribute with name of instance\_dimension whose value is the instance dimension name (station in this example). The index variable must have the profile dimension as its sole dimension, and must have an integer type. Each value in the index variable is the zero-based station index that the profile belongs to i.e. profile p belongs to station i=station\_index(p), as in section H.2.5.

The count variable (row\_size) contains the number of elements for each profile, which must be written contiguously. The count variable is identified by having an attribute with name sample\_dimension whose value is the sample dimension (obs in this example) being counted. It must have the profile dimension as its sole dimension, and must have an integer type. The number of elements in profile p is recorded in row\_size(p), as in section H.2.4. The sample dimension need not be the netCDF unlimited dimension, though it commonly is.

## H.6. Trajectory of Profiles

When profiles are taken along a trajectory, one gets a collection of profiles called a trajectoryProfile. A data variable may contain a collection of such trajectoryProfile features, one feature per trajectory. The instance dimension in the case of a trajectoryProfile is also referred to as the **trajectory dimension**. The instance variables, which have just this dimension, are also referred to as **trajectory variables** and are considered to contain information describing the trajectories. The trajectory variables may contain missing values. This allows one to reserve space for additional trajectories that may be added at a later time, as discussed in section 9.6. TrajectoryProfiles are more complicated than trajectories because there are two element dimensions. Each trajectory has a number of profiles as its elements, and each profile has a number of data from various levels as its elements. It is strongly recommended that there always be a variable (of any data type) with the profile dimension and the **cf\_role** attribute " **profile\_id** ", whose values uniquely identify the profiles.

### **H.6.1. Multidimensional array representation of trajectory profiles**

If there are the same number of profiles for all trajectories, and the same number of vertical levels for every profile, one can use the multidimensional representation:

*Example H.20. Time series of atmospheric sounding profiles along a set of trajectories stored in a multidimensional array representation.*





```

dimensions:
  trajectory = 22 ;
  profile = 33;
  z = 42 ;

variables:
  int trajectory (trajectory ) ;
    trajectory:cf_role = "trajectory_id" ;

  float lon(trajectory, profile) ;
    lon:standard_name = "longitude";
    lon:units = "degrees_east";
  float lat(trajectory, profile) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;

  float alt(trajectory, profile , z) ;
    alt:standard_name = "altitude";
    alt:long_name = "height above mean sea level" ;
    alt:units = "km" ;
    alt:positive = "up" ;
    alt:axis = "Z" ;

  double time(trajectory, profile ) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
    time:missing_value = -999.9;

  float pressure(trajectory, profile , z) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat alt" ;

  float temperature(trajectory, profile , z) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat alt" ;

  float humidity(trajectory, profile , z) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
    humidity:coordinates = "time lon lat alt" ;

attributes:
  :featureType = "trajectoryProfile";

```

The pressure(i,p,o), temperature(i,p,o), and humidity(i,p,o) data for element o of profile p along trajectory i are associated with the coordinate values time(i,p), alt(i,p,o), lat(i,p), and lon(i,p). Any of the three dimensions could be the netCDF unlimited dimension, if it might be useful to be able enlarge it.

If all of the profiles along any given trajectory have the same set of vertical coordinates values, the vertical auxiliary coordinate variable could be dimensioned alt(trajectory, z). If all the profiles have the same set of vertical coordinates, the vertical auxiliary coordinate variable could be one-dimensional alt(z), or replaced by a one-dimensional coordinate variable z(z), provided the values are ordered monotonically. In the latter case, listing the vertical coordinate variable in the coordinates attribute is optional.


If the profiles are taken along all the trajectories at the same set of times, the time auxiliary coordinate variable could be one-dimensional time(profile), or replaced by a one-dimensional coordinate variable time(time), where the size of the time dimension is now equal to the number of profiles along each trajectory. In the latter case, listing the time coordinate variable in the coordinates attribute is optional.

At the cost of some wasted space, the multidimensional array representation also allows one to have a variable number of profiles for different trajectories, and varying numbers of levels for different profiles. In these cases, any unused elements of the data and auxiliary coordinate variables must contain missing data values (section 9.6).

### **H.6.2. Profiles along a single trajectory**

If there is only one trajectory in the data variable, there is no need for the trajectory dimension:

*Example H.21. Time series of atmospheric sounding profiles along a trajectory stored in a multidimensional array representation.*



```

dimensions:
  profile = 33;
  z = 42 ;

variables:
  int trajectory;
    trajectory:cf_role = "trajectory_id" ;

  float lon(profile) ;
    lon:standard_name = "longitude";
    lon:units = "degrees_east";
  float lat(profile) ;
    lat:standard_name = "latitude";
    lat:long_name = "station latitude" ;
    lat:units = "degrees_north" ;

  float alt(profile, z) ;
    alt:standard_name = "altitude";
    alt:long_name = "height above mean sea level" ;
    alt:units = "km" ;
    alt:positive = "up" ;
    alt:axis = "Z" ;

  double time(profile ) ;
    time:standard_name = "time";
    time:long_name = "time of measurement" ;
    time:units = "days since 1970-01-01 00:00:00" ;
    time:missing_value = -999.9;

  float pressure(profile, z) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat alt" ;

  float temperature(profile, z) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat alt" ;

  float humidity(profile, z) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
    humidity:coordinates = "time lon lat alt" ;

attributes:
  :featureType = "trajectoryProfile";

```

The `pressure(p,o)`, `temperature(p,o)`, and `humidity(p,o)` data for element `o` of profile `p` are associated with the coordinate values `time(p)`, `alt(p,o)`, `lat(p)`, and `lon(p)`. If all the profiles have the same set of vertical coordinates, the vertical auxiliary coordinate variable could be one-dimensional `alt(z)`, or replaced by a one-dimensional coordinate variable `z(z)`, provided the values are ordered monotonically. In the latter case, listing the vertical coordinate variable in the coordinates attribute is optional.

### H.6.3. Ragged array representation of trajectory profiles

When the number of profiles and levels for each trajectory varies, one can use a ragged array representation. Each of the two element dimensions (along a trajectory, within a profile) could in principle be stored either contiguous or indexed, but this convention supports only one of the four possible choices. This uses the contiguous ragged array representation for each profile (9.3.3), and the indexed ragged array representation to organise the profiles into time series (9.3.4). The canonical use case is when writing real-time data streams that contain profiles from many trajectories, arriving randomly, with the data for each entire profile written all at once.

*Example H.22. Time series of atmospheric sounding profiles along a set of trajectories stored in a ragged array representation.*

```
dimensions:
  obs = UNLIMITED ;
  trajectory = 22 ;
  profile = 142 ;

variables:
  int trajectory(trajectory) ;
    cf_role = "trajectory_id" ;

  double time(profile);
    time:standard_name = "time";
    time:long_name = "time" ;
    time:units = "days since 1970-01-01 00:00:00" ;
  float lon(profile);
    lon:standard_name = "longitude";
    lon:long_name = "longitude" ;
    lon:units = "degrees_east" ;
  float lat(profile);
    lat:standard_name = "latitude";
    lat:long_name = "latitude" ;
    lat:units = "degrees_north" ;
  int row_size(profile) ;
    row_size:long_name = "number of obs for this profile " ;
    row_size:sample_dimension = "obs" ;
  int trajectory_index(profile) ;
    trajectory_index:long_name = "which trajectory this profile is for" ;
    trajectory_index:instance_dimension= "trajectory" ;

  float z(obs) ;
    z:standard_name = "altitude";
    z:long_name = "height above mean sea level" ;
    z:units = "km" ;
    z:positive = "up" ;
    z:axis = "Z" ;

  float pressure(obs) ;
    pressure:standard_name = "air_pressure" ;
    pressure:long_name = "pressure level" ;
    pressure:units = "hPa" ;
    pressure:coordinates = "time lon lat z" ;

  float temperature(obs) ;
    temperature:standard_name = "surface_temperature" ;
    temperature:long_name = "skin temperature" ;
    temperature:units = "Celsius" ;
    temperature:coordinates = "time lon lat z" ;
```

```
float humidity(obs) ;
    humidity:standard_name = "relative_humidity" ;
    humidity:long_name = "relative humidity" ;
    humidity:units = "%" ;
    humidity:coordinates = "time lon lat z" ;

attributes:
    :featureType = "trajectoryProfile";
```

The pressure(o), temperature(o), and humidity(o) data for element o of profile p along trajectory i are associated with the coordinate values time(p), z(o), lat(p), and lon(p).

The index variable (trajectory\_index) is identified by having an attribute with name of instance\_dimension whose value is the instance dimension name (trajectory in this example). The index variable must have the profile dimension as its sole dimension, and must have an integer type. Each value in the index variable is the zero-based trajectory index that the profile belongs to i.e. profile p belongs to trajectory i=trajectory\_index(p), as in section H.2.5.

The count variable (row\_size) contains the number of elements for each profile, which must be written contiguously. The count variable is identified by having an attribute with name sample\_dimension whose value is the sample dimension (obs in this example) being counted. It must have the profile dimension as its sole dimension, and must have an integer type. The number of elements in profile p is recorded in row\_size(p), as in section H.2.4. The sample dimension need not be the netCDF unlimited dimension, though it commonly is.

# Appendix I: The CF data model



# Abstract

The CF conventions are designed to promote the creation, processing, and sharing of climate and forecasting data using Network Common Data Form (netCDF) files and libraries. This appendix contains the explicit data model for CF to provide an interpretation of the conceptual structure of CF which is consistent, comprehensive, and as far as possible independent of the netCDF encoding. An explicit comprehensive data model promotes the CF conventions being better understood, provides guidance during the development of future extensions to the CF conventions, and helps software developers to design CF-compliant data-processing applications and to build interfaces to other explicit data models.

# Introduction

A data model is an abstract interpretation of the data, that identifies the elements of the dataset and their scientific intent, and describes how they are related to one another and to the real or model world from which the data were derived. A data model is necessary because it imposes the rules, constraints, and relationships connecting metadata to the data that are needed to imagine how the quantities included in the dataset should be combined and processed scientifically.

The CF data model was first created for CF version 1.6 and published externally in journal Geoscientific Model Development (GMD) [CFDM], and that version also includes further discussions on the background and motivation, as well as on the relationships between the CF data model and other data models. The data model was transcribed from the GMD paper into the CF conventions at version 1.9, also incorporating the modifications required to represent new features introduced at versions 1.7, 1.8 and 1.9.

## Design criteria of the CF data model

The primary requirement of the data model is that it should be able to describe all existing and conceivable CF-compliant datasets.

The data model should comprise a minimal set of elements that are sufficient for accommodating all aspects of the CF conventions. The elements of the data model are restricted to those that are explicitly mentioned in CF, but there do not have to be as many elements in the data model as there are entities described by CF, because a single data model element can incorporate more than one CF entity. For example, in CF, coordinates and coordinate bounds are distinct entities, but coordinate bounds cannot exist without coordinates. Therefore, it makes sense in the data model to group them into a single element.

Similarly, while it is possible to introduce additional elements not presently needed or used by CF, this would not be desirable because it would increase the likelihood of the data model becoming outdated or inconsistent with future versions of CF.

The CF data model should also be independent of the encoding. This means that it should not be constrained by the parts of the CF conventions which describe explicitly how to store (i.e. encode) metadata in a netCDF file. The virtue of this is that should netCDF ever fail to meet the community needs, the groundwork for applying CF to other file formats will already exist.

## The netCDF data model

The existing CF conventions are for use with netCDF files following the netCDF "classic" data model (figure 3). We first give a brief summary of this explicit data model, since the CF conventions cannot be described without reference to the components of netCDF.

NetCDF classic files contain data in named variables, which can be single numbers (with no dimensions), one-dimensional arrays (vectors), or multidimensional arrays, and the dimensions are declared by name in the file. Variables can be of integer, floating point or character data types. Variables may have attributes attached, of any data type. Attributes can have a single value or consist of a one-dimensional array. NetCDF files also have "global" file attributes which provide

information about the dataset as a whole. NetCDF library software has functions to define dimensions, variables and attributes, and write and read data.

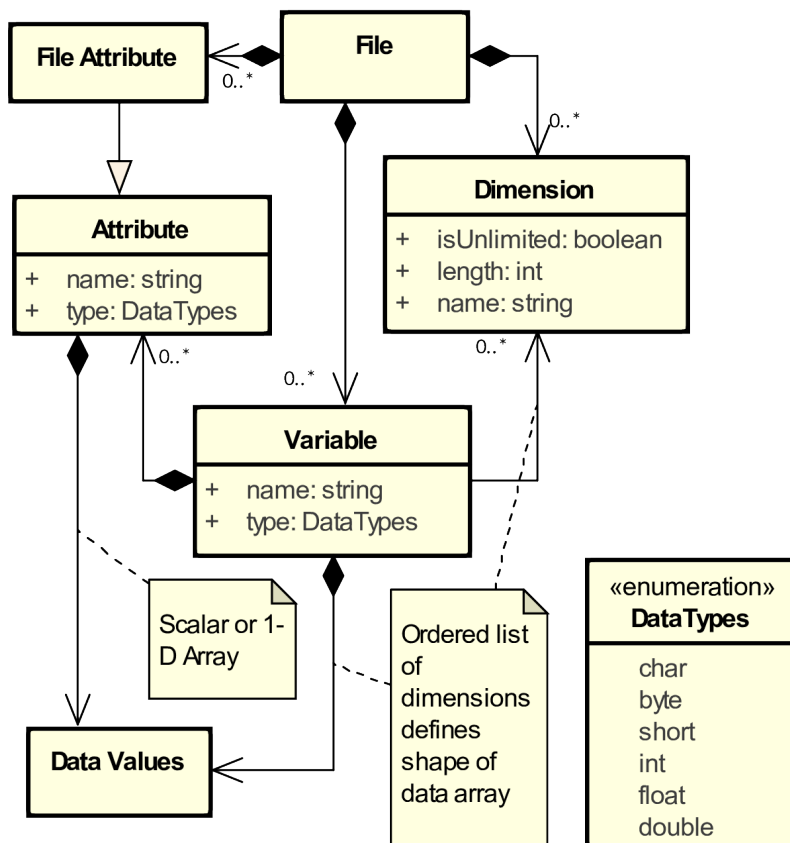


Figure 3. Key components of the netCDF classic data model. Files consist of global attributes, dimensions and variables. Variables contain attributes and data, and attributes also contain data. Variables, attributes and dimensions all contain properties, such as a "name" which identifies them in the file. A data array has a data type for all of its elements (e.g. "double" for 64-bit floating point numbers).

## Elements of CF-netCDF

The CF-netCDF elements are listed in [table 1](#) and shown (in blue) with their interrelationships in [figure 2](#). The CF data model has been derived from these CF-netCDF elements and relationships with the aims of removing aspects specific to the netCDF encoding, and reducing the number of elements, whilst retaining the ability to describe the CF conventions fully, in order to meet the design criteria.

Table 1. The elements of the CF-netCDF conventions. The relationships to netCDF entities are shown in [figure 2](#).

CF-netCDF element	Description
Data variable	Scientific data discretised within a domain
Dimension	Independent axis of the domain
Coordinate variable	Unique coordinates for a single axis
Auxiliary coordinate variable	Additional or alternative coordinates for any axes
Scalar coordinate variable	Coordinate for an implied size one axis

CF-netCDF element	Description
Grid mapping variable	Horizontal coordinate system
Boundary variable	Cell vertices
Cell measure variable	Cell areas or volumes
Ancillary data variable	Metadata that depends on the domain
Formula terms attribute	Vertical coordinate system
Feature type attribute	Characteristics of discrete sampling geometry
Cell methods attribute	Description of variation within cells

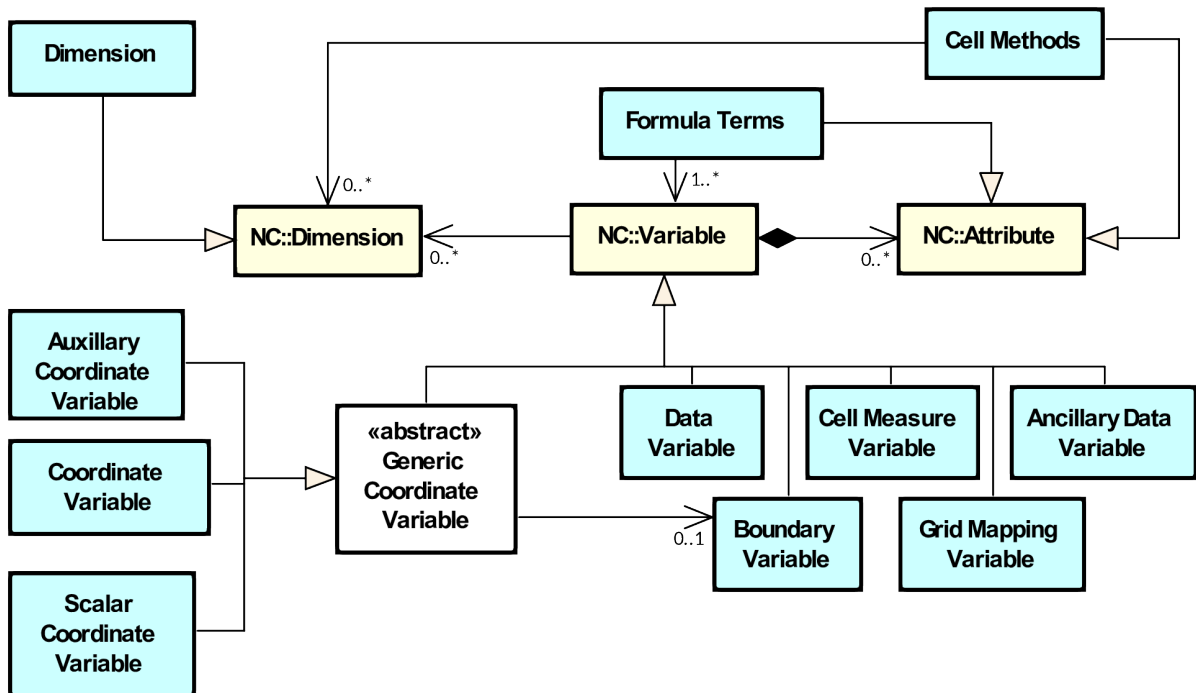


Figure 4. The relationships between CF-netCDF elements and their corresponding netCDF variables, dimensions and attributes (defined in figure 3 and identified here with the "NC" prefix). It is useful to define an abstract generic coordinate variable that can be used to refer to coordinates when their type (coordinate, auxiliary or scalar coordinate variable) is not an issue. The CF convention details the mechanisms which are used in the netCDF file to express the relationships among the CF-netCDF elements, but these are not shown.

# The CF data model

The elements of the CF data model (figure 3, figure 4 and figure 5) are called "constructs", a term chosen to differentiate from the CF-netCDF entities previously defined and to be programming language-neutral (i.e. as opposed to "object" or "structure"). The constructs, listed in table 2, are related to CF-netCDF entities (figure 2), which in turn relate to the components of netCDF file (figure 3).

Table 2. The constructs of the CF data model. The relationships between the constructs and CF-netCDF entities are shown in in figure 3, figure 4 and figure 5.

CF construct	Description
Field	Scientific data discretised within a domain
Domain	Describes a domain
Domain axis	Independent axes of the domain
Dimension coordinate	Cell locations
Auxiliary coordinate	Cell locations
Coordinate reference	Domain coordinate systems
Domain ancillary	Cell locations in alternative coordinate systems
Cell measure	Cell size or shape
Field ancillary	Ancillary metadata which varies within the domain
Cell method	Describes how data represents variation within cells

The field construct and domain construct are central to the CF data model in that all the other constructs are included in one or other of them (figure 3). The constructs contained by the field and domain constructs cannot exist independently, with the exception of the domain construct itself that may be part of a field construct or exist on its own, as is indicated by the nature of the class associations shown in figure 3. All CF-netCDF elements are mapped to field constructs, domain constructs or their components; and the field and domain constructs completely contain all the data and metadata which can be extracted from the file using the CF conventions.

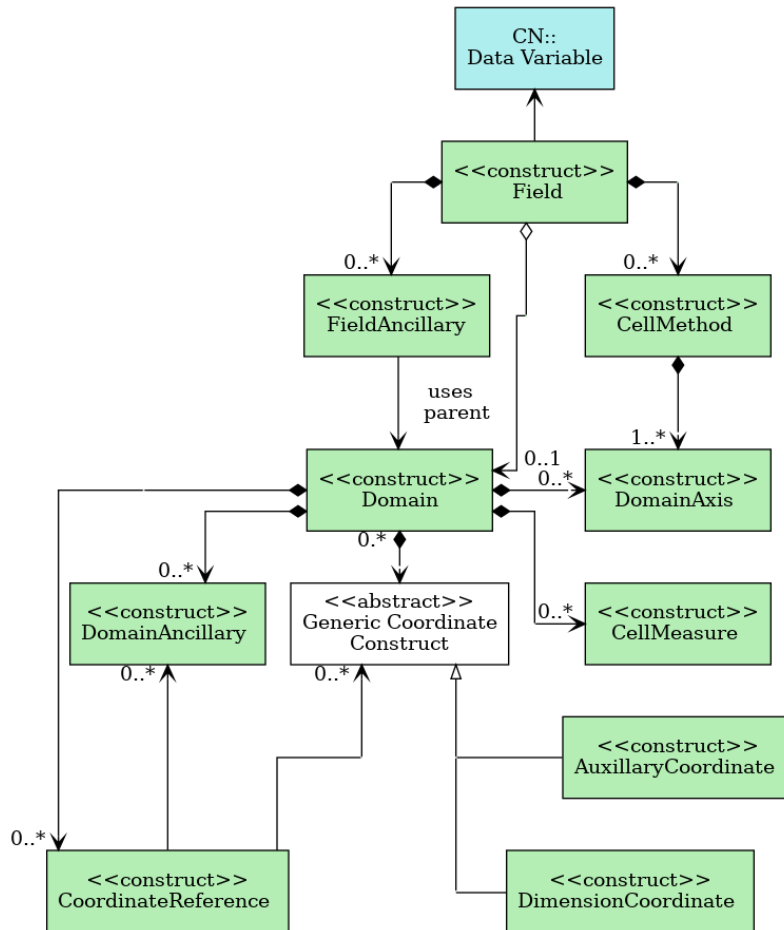


Figure 5. The constructs of the CF data model. The field construct corresponds to a CF-netCDF data variable (defined in figure 2 and identified here with the "CN" prefix). Relationships between other constructs and CF-netCDF are given in figure 4 and figure 5. The domain construct provides the linkage between the field construct and the constructs which describe measurement locations and cell properties. It is useful to define an abstract generic coordinate construct that can be used to refer to coordinates when their type (dimension or auxiliary coordinate construct) is not an issue.

## Field construct

A field construct (figure 3) corresponds to a CF-netCDF data variable with all of its metadata. The field construct consists of

- A data array.
- A domain construct containing metadata defining the domain that provides measurement locations and cell properties for the data.
- Field ancillary constructs containing ancillary metadata defined over the same domain.
- Cell method constructs containing metadata to describe how the cell values represent the variation of the physical quantity within the cells of the domain.
- Properties to describe aspects of the data that are independent of the domain.

All of the constructs contained by the field construct are optional (as indicated by "0.." in figure 3). The only component of the field which is mandatory is the data array.

The properties of the field construct correspond to some netCDF attributes of variables (e.g. the

**units**, **long\_name**, and **standard\_name**), and some netCDF global file attributes (e.g. **history** and **institution**). The term "property" is used, rather than "attribute", because not all CF-netCDF attributes are properties in this sense—some CF-netCDF attributes are used to point to (i.e. reference) other netCDF variables and so only describe the data indirectly (e.g. the coordinates attribute), and others have structural functions in the CF-netCDF file (e.g. the Conventions attribute).

In the data model, netCDF global file attributes apply to every data variable in the file, except where they are overridden by netCDF data variable attributes with the same name. This interpretation of global file attributes is not stated in the CF conventions, but for the data model it is necessary because there is no notion of a file. Hence, metadata stored in attributes of the file as a whole have to be transferred to the field construct. If present, the global file attribute **featureType** applies to every data variable in the file with a discrete sampling geometry. Hence, the feature type is regarded as a property of the field construct.

The **standard\_name** property constrains the **units** property (i.e. only certain units are consistent with each standard name) and in some cases also the dimensions that a data variable must have. These constraints, however, do not supply any further information—they are just for self consistency. Similarly the **featureType** property imposes some requirements on the axes the domain must have. Following the aim of constructing a minimal data model, the standard name and feature type are not regarded as separate constructs within the field, because they do not depend on any other construct for their interpretation.

## Domain construct

The domain construct ([figure 3](#)) describes a domain comprising measurement locations and cell properties. The domain construct is the only metadata construct that may also exist independently of a field construct. The domain construct contains properties to describe the domain (in the same sense as for the field construct) and relates the following metadata constructs

- Domain axis constructs.
- Dimension coordinate and auxiliary coordinate constructs.
- Coordinate reference constructs.
- Domain ancillary constructs.
- Cell measure constructs.

All of the constructs contained by the domain construct are optional (as indicated by "0.." in [figure 3](#)).

In CF-netCDF, domain information is stored either implicitly via data variable attributes (such as **coordinates**), or explicitly in a domain variable. In the latter case, the domain exists without reference to a data array.

## Domain axis construct and the data array

A domain axis construct ([figure 4](#)) comprises a positive integer which specifies the number of cells lying along an independent axis of the domain. In CF-netCDF, it is usually defined either by a

netCDF dimension or by a scalar coordinate variable, which implies a domain axis of size one. The field construct's data array spans the domain axis constructs of the domain, except that the size-one axes may optionally be omitted, because their presence makes no difference to the order of the elements. Hence, the data array may be zero-dimensional (i.e. scalar) if there are no domain axis constructs of size greater than one.

When a collection of discrete sampling geometry (DSG) features has been combined in a data variable using the incomplete orthogonal or ragged representations to save space, the axis size has to be inferred, but this is an aspect of unpacking the data, rather than its conceptual description. In practice, the unpacked data array may be dominated by missing values (as could occur, for example, if all features in a collection of time series had no common time coordinates), in which case it may be preferable to view the collection as if each DSG feature were a separate variable, each one corresponding to a different field construct.

## Coordinates: dimension coordinate and auxiliary constructs

Coordinate constructs ([figure 4](#)) provide information which locate the cells of the domain and which depend on a subset of the domain axis constructs. A coordinate construct consists of an optional data array of the coordinate values spanning the subset of the domain axis constructs, properties to describe the coordinates (in the same sense as for the field construct), an optional data array of cell bounds recording the extents of each cell, and any extra arrays needed to interpret the cell bounds values. The data array of the coordinate values is required, except for the special cases described below.

There are two distinct types of coordinate construct: dimension coordinate constructs unambiguously describe cell locations for a single domain axis, thus providing independent variables on which the field construct's data depend; and auxiliary coordinate constructs provide any type of coordinate information for one or more of the domain axes.

A dimension coordinate construct contains numeric coordinates for a single domain axis that are non-missing and strictly monotonically increasing or decreasing. CF-netCDF coordinate variables and numeric scalar coordinate variables correspond to dimension coordinate constructs.

Auxiliary coordinate constructs have to be used, instead of dimension coordinate constructs, when a single domain axis requires more than one set of coordinate values, when coordinate values are not numeric, strictly monotonic, or contain missing values, or when they vary along more than one domain axis construct simultaneously. CF-netCDF auxiliary coordinate variables and non-numeric scalar coordinate variables correspond to auxiliary coordinate constructs.

When cell bounds are provided, each cell comprises one or more parts, and each part is either a collection of points, a line defined by a connected series of points, or a polygonal area (i.e. the region enclosed by a connected series of points, where the first and last points are connected as well). All parts of all the cells must be of the same one of these three kinds, which are called "geometry types". The bounds array spans the domain axis constructs of the coordinate construct, with the addition of two trailing ragged dimensions. The first extra dimension indexes the parts of each cell and the second indexes the points that describe each part.



If cell bounds are provided for a dimension coordinate construct then each cell must have exactly two vertices forming a line geometry. For climatological time coordinates the actual cell extent comprises multiple time segments equivalent to multiple line geometry parts, but the bounds require just two points to define each cell, namely the earliest and latest times of the sequence. The cell method constructs indicate how the multiple time segments should be inferred from these climatological bounds.

If a polygonal cell is composed of multiple parts it may have holes, i.e. polygon regions that are to be omitted from, as opposed to included in, the cell extent. When such holes are present an "interior ring" array is required that records whether each polygon is to be included or excluded from the cell, and is supplied by an interior ring variable in CF-netCDF. The interior ring array spans the domain axis constructs of the coordinate construct, with the addition of an extra ragged dimension that indexes the parts for each cell. For example, a cell describing the land area surrounding a lake would require two polygon parts: one defines the outer boundary of the land area; the other, recorded as an interior ring, is the lake boundary, defining the inner boundary of the land area.

If a domain axis construct does not correspond to a continuous physical quantity, then it is not necessary for it to be associated with a dimension coordinate construct. For example, this is the case for an axis that runs over ocean basins or area types, or for a domain axis that indexes a time series at scattered points. These axes are discrete axes in CF-netCDF. In such cases cells may be described with one-dimensional auxiliary coordinate constructs for which, provided that there is a cell bounds array to describe the cell extents, the coordinate array is optional, since coordinates are not always well defined for such cells. A CF-netCDF geometry container variable is used to store cell bounds without coordinates for a discrete axis.

In CF-netCDF, when a geometry container variable is present it explicitly describes the geometry type and identifies the node coordinate variables that contain the cell vertices. The geometry container variable also identifies a node count variable that contains the number of nodes per cell when more than one cell is present, and a part node count variable that contains the number of nodes per cell part when cells are composed of multipart lines, multipart polygons, or polygons with holes. When a geometry container variable is not present then the bounds contain exactly one part and their geometry type is implied by convention: for multidimensional auxiliary coordinates each cell is a single polygon, and for all other types of coordinate each cell is a single line segment defined by two points. In the case of climatological time coordinates, the two points of the cell bounds, in conjunction with the cell methods, imply the existence of multiple line parts, different subsets of which are associated with the different cell methods required to define the climatology. For example, when the field construct's data are multiannual averages of monthly minima, the implied cell parts define the individual months over which the original data was minimised; and all of the implied parts taken together define the exact temporal extent of the average of the monthly minima.

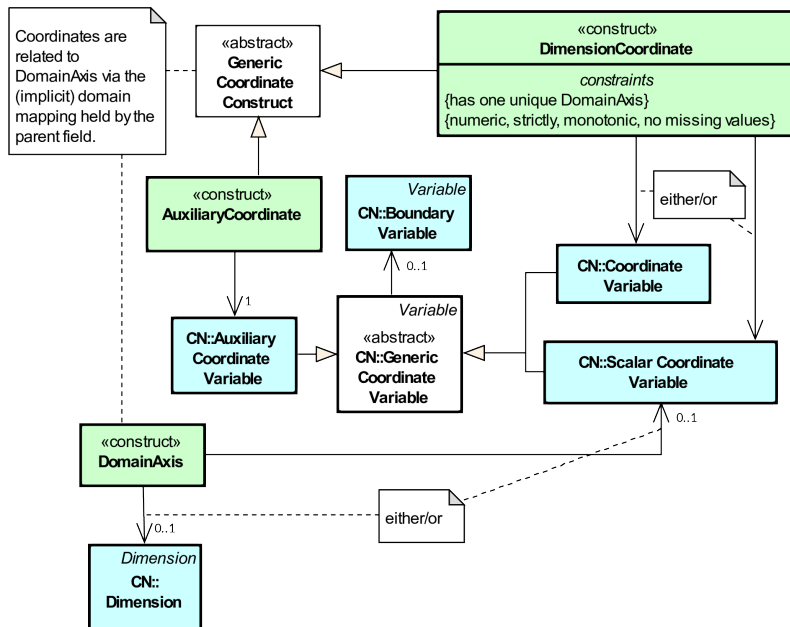


Figure 6. The relationship between domain axis, dimension coordinate and auxiliary coordinate constructs and CF-netCDF (defined in figure 2 and identified here with the "CN" prefix). A dimension or auxiliary coordinate construct is defined by a CF-netCDF coordinate, scalar coordinate or auxiliary coordinate variable, and the associated CF-netCDF boundary variable if it exists. A generic coordinate construct spans one or more domain axis constructs, but the mapping of which ones is only held by the parent field construct.

## Coordinate reference construct

The domain may contain various coordinate systems, each of which is constructed from a subset of the dimension and auxiliary coordinate constructs. For example, the domain of a four-dimensional field construct may contain horizontal (y-x), vertical (z), and temporal (t) coordinate systems. There may be more than one of each of these, if there is more than one coordinate construct applying to a particular spatiotemporal dimension (for example, there could be both latitude-longitude and y-x projection coordinate systems).

A coordinate system may be constructed *implicitly* from any subset of the coordinate constructs, yet a coordinate construct does not need to be explicitly or exclusively associated with any coordinate system. A coordinate system of the field construct can be *explicitly* defined by a coordinate reference construct (figure 5) which relates the coordinate values of the coordinate system to locations in a planetary reference frame and consists of the following:

- The dimension coordinate and auxiliary coordinate constructs that define the coordinate system to which the coordinate reference construct applies. Note that the coordinate values are not relevant to the coordinate reference construct, only their properties.
- A definition of a datum specifying the zeroes of the dimension and auxiliary coordinate constructs which define the coordinate system. The datum may be explicitly indicated via properties, or it may be implied by the metadata of the contained dimension and auxiliary coordinate constructs. For example, in a two-dimensional geographical latitude-longitude coordinate system based upon a spherical Earth, the datum is assumed to be 0°N, 0°E. Note that the datum may contain the definition of a geophysical surface which corresponds to the zero of a vertical coordinate construct, and this may be required for both horizontal and vertical coordinate systems.

- A coordinate conversion, which defines a formula for converting coordinate values taken from the dimension or auxiliary coordinate constructs to a different coordinate system. A term of the conversion formula can be a scalar or vector parameter which does not depend on any domain axis constructs, may have units (such as a reference pressure value), or may be a descriptive string (such as the projection name "mercator"), or it can be a domain ancillary construct (such as one containing spatially varying orography data).

For  $y$ - $x$  coordinates, the coordinate conversion is either a map projection, which converts between Cartesian coordinates and spherical or ellipsoidal coordinates on the vertical datum, or a conversion between different spherical coordinate systems (as in the case of rotated pole coordinates). In the case of  $z$  coordinates, the conversion is between a coordinate construct with parameterised values (such as ocean sigma coordinates) and a coordinate construct with dimensional values (such as depths), again with respect to the vertical datum. The coordinate conversion is not required if no other coordinate systems are described.

Some parts of the coordinate reference construct may not be relevant to a given coordinate construct which it contains. The relevant parts are determined by an application using the coordinate reference construct. For example, for a coordinate reference construct which contained coordinate constructs for  $y$ - $x$  projection and latitude and longitude coordinates, a datum comprising a reference ellipsoid would apply to all of them, but projection parameters would only apply to the projection coordinates.

In CF-netCDF, coordinate system information that is not found in coordinate or auxiliary coordinate variables is stored in a grid mapping variable or the `formula_terms` attribute of a coordinate variable, for horizontal or vertical coordinate variables, respectively. Although these two cases are arranged differently in CF-netCDF, each one contains, sometimes implicitly, a datum or a coordinate conversion formula (or both) and is therefore regarded as a coordinate reference construct by the data model. A grid mapping name or the standard name of a parametric vertical coordinate corresponds to a string-valued scalar parameter of a coordinate conversion formula. A grid mapping parameter which has more than one value (as is possible with the "standard parallel" attribute) corresponds to a vector parameter of a coordinate conversion formula. A data variable referenced by a `formula_terms` attribute corresponds to the term of a coordinate conversion formula—either a domain ancillary construct or, if it is zero-dimensional, a scalar parameter.

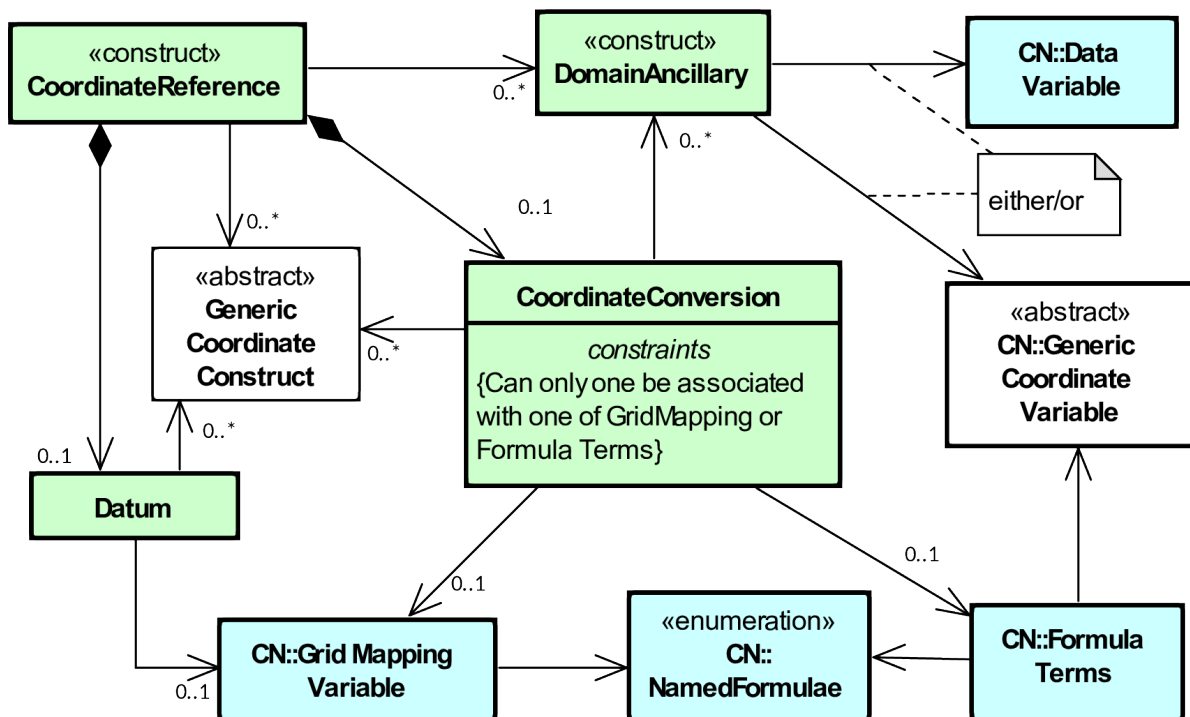


Figure 7. The relationship between coordinate reference and domain ancillary constructs and CF-netCDF (defined in figure 2 and identified here with the "CN" prefix). A coordinate reference construct is defined either by a grid mapping variable, or a `formula_terms` attribute of a CF-netCDF coordinate variable. The coordinate reference construct is composed of generic coordinate constructs, a datum, and a coordinate conversion formula. The coordinate conversion formula is usually defined by a named formula in the CF conventions. A domain ancillary construct term of a coordinate conversion formula is defined by a CF-netCDF data variable or a CF-netCDF generic coordinate variable.

## Domain ancillary construct

A domain ancillary construct (figure 5) provides information which is needed for computing the location of cells in an alternative coordinate system. It is the value of a term of a coordinate conversion formula that contains a data array which is either scalar or which depends on one, more or all of the domain axis constructs.

It also contains an optional array of cell bounds recording the extents of each cell (only applicable if the array contains coordinate data) and properties to describe the data (in the same sense as for the field construct). An array of cell bounds spans the same domain axes as the data array, with the addition of an extra dimension whose size is that of the number of vertices of each cell.

CF-netCDF variables named by the `formula_terms` attribute of a CF-netCDF coordinate variable correspond to domain ancillary constructs. These CF-netCDF variables may be coordinate, scalar coordinate, or auxiliary coordinate variables, or they may be data variables. For example, in a coordinate conversion for converting between ocean sigma and height coordinate systems, the value of the "depth" term for horizontally varying distance from ocean datum to sea floor would correspond to a domain ancillary construct. In the case of a named term being a type of coordinate variable, that variable will correspond to an independent domain ancillary construct in addition to the coordinate construct; that is, a single CF-netCDF variable is translated into two constructs (see example 1).

*Example 1. A single CF-netCDF variable corresponding to two data model constructs. The netCDF variable **A** corresponds to an auxiliary coordinate construct (since it is referenced by the **coordinates** attribute) as well as a domain ancillary construct (since it is referenced by the **formula\_terms** attribute). Similarly for the netCDF variable **B**.*

```
float eta(eta) ;
  eta:long_name = "eta at full levels" ;
  eta:positive = "down" ;
  eta:standard_name = "atmosphere_hybrid_sigma_pressure_coordinate" ;
  eta:formula_terms = "a: A b: B ps: PS p0: P0" ;
float A(eta) ;
  A:units = "Pa" ;
float B(eta) ;
  B:units = "1" ;
float PS(lat, lon) ;
  PS:units = "Pa" ;
float P0 ;
  P0:units = "Pa" ;
float temp(eta, lat, lon) ;
  temp:standard_name = "air_temperature" ;
  temp:units = "K";
  temp:coordinates = "A B" ;
```

## Cell measure construct

A cell measure ([figure 3](#)) construct provides information about the size or shape of the cells and depending on one, more or all of the domain axis constructs. Cell measure constructs have to be used when the size or shape of the cells cannot be deduced from the dimension or auxiliary coordinate constructs without special knowledge that a generic application cannot be expected to have.

The cell measure construct consists of a numeric array of the metric data which span one, more or all of the domain axis constructs, and properties to describe the data (in the same sense as for the field construct). The properties must contain a "measure" property, which indicates which metric of the space it supplies, e.g. cell horizontal areas, and a units property consistent with the measure property, e.g. m<sup>2</sup>. It is assumed that the metric does not depend on axes of the domain which are not spanned by the array, along which the values are implicitly propagated. CF-netCDF cell measure variables correspond to cell measure constructs.

## Field ancillary constructs

The field ancillary construct ([figure 3](#)) provides metadata which are distributed over the same sampling domain as the field itself. For example, if a data variable holds a variable retrieved from a satellite instrument, a related ancillary data variable might provide the uncertainty estimates for those retrievals (varying over the same spatiotemporal domain).

The field ancillary construct consists of an array of the ancillary data which is either scalar or

which depends on one, more or all of the domain axis constructs, and properties to describe the data (in the same sense as for the field construct). It is assumed that the data do not depend on axes of the domain which are not spanned by the array, along which the values are implicitly propagated. CF-netCDF ancillary data variables correspond to field ancillary constructs. Note that a field ancillary construct is constrained by the domain definition of the parent field construct but does not contribute to the domain's definition, unlike, for instance, an auxiliary coordinate construct or domain ancillary construct.

## Cell method construct

The cell method constructs (figure 3) describe how the cell values represent the variation of the physical quantity within its cells—the structure of the data at a higher resolution. A single cell method construct consists of a set of axes (see below), a "method" property which describes how a value of the field construct's data array describes the variation of the quantity within a cell over those axes (e.g. a value might represent the cell area average), and properties serving to indicate more precisely how the method was applied (e.g. recording the spacing of the original data, or the fact the method was applied only over El Niño years).

The field construct may contain an ordered sequence of cell method constructs describing multiple processes which have been applied to the data, e.g. a temporal maximum of the areal mean has two components—a mean and a maximum, each acting over different sets of axes. It is an ordered sequence because the methods specified are not necessarily commutative. There are properties to indicate climatological time processing, e.g. multiannual means of monthly maxima, in which case multiple cell method constructs need to be considered together to define a special interpretation of boundary coordinate array values. The `cell_methods` attribute of a CF-netCDF data variable corresponds to one or more cell method constructs.

The axes over which a cell method applies are either a subset of the domain axis constructs or a collection of strings which identify axes that are not part of the domain. The latter case is particularly useful when the coordinate range for an axis cannot be precisely defined, making it impossible to define a domain axis construct. For example, a climatological time mean might be based on data which are not available over the same time periods at every horizontal location—the useful information that the data have been temporally averaged can be recorded without specifying the range of times. The strings which identify such axes are well defined in that they must be standard names (e.g. time, longitude) or the special string `area`, indicating a combination of horizontal axes.

# Revision History

14 June 2004

1. Added [the section called “Lambert azimuthal equal area”](#).
2. [the section called "Polar Stereographic"](#) : Added `latitude_of_projection_origin` map parameter.

1 July 2004

1. [Section 5.7, "Scalar Coordinate Variables"](#) : Added note that use of scalar coordinate variables inhibits interoperability with COARDS conforming applications.
2. [Example 5.13, "Multiple forecasts from a single analysis"](#) : Added `positive` attribute to the scalar coordinate `p500` to make it unambiguous that the pressure is a vertical coordinate value.

20 September 2004

1. [Section 7.3, "Cell Methods"](#) : Changed several incorrect occurrences of the cell method `"standard deviation"` to `"standard_deviation"`.

22 October 2004

1. Added [Example 5.7, "Lambert conformal projection"](#).

25 November 2005

1. [the section called "Atmosphere hybrid height coordinate"](#) : Fixed definition of atmosphere hybrid height coordinate.

21 March 2006

1. Added [the section called "Azimuthal equidistant"](#).
2. Added [the section called "Atmosphere natural log pressure coordinate"](#).

17 January 2008

1. [Preface](#) : Changed text to refer to rules of CF governance, and provisional status.
2. [Chapter 4, Coordinate Types](#) , [Chapter 5, Coordinate Systems and Domain](#) : Made changes regarding use of the `axis` attribute to identify horizontal coordinate variables.
3. Changed document version to 1.1.

4 May 2008

1. [Section 5.6, "Horizontal Coordinate Reference Systems, Grid Mappings, and Projections"](#), [Appendix F, Grid Mappings](#) : Additions and revisions to CF grid mapping attributes to support the specification of coordinate reference system properties ([Trac ticket #18](#)).
2. [Table 3.1, "Supported Units"](#) : Corrected Prefix for Factor "1e-2" from "deci" to "centi". ([Trac ticket #25](#)).
3. Changed document version to 1.2.

15 July 2008

1. [Section 3.5, "Flags"](#) , [Appendix A, Attributes](#) , [Appendix C, Standard Name Modifiers](#) : Enhanced the Flags definition to support bit field notation using a `flag_masks` attribute. ([Trac ticket #26](#)).

2. Changed document version to 1.3.

9 October 2008

1. Fixed defect in [Example 4.3, "Atmosphere sigma coordinate"](#). (Trac ticket #30).
2. Fixed defect in [Chapter 5, Coordinate Systems and Domain](#). (Trac ticket #32).

7 November 2008

1. Fixed defect in wording of [Chapter 5, Coordinate Systems and Domain](#). (Trac ticket #35).
2. Fixed defect related to subsection headings in [\[dimensionless-v-coord\]](#). (Trac ticket #36).

10 December 2008

1. Changes related to removing ambiguity in [Section 7.3, "Cell Methods"](#). (Trac ticket #17).
2. Changed document version to 1.4.

11 December 2008

1. Added grid mappings Lambert Cylindrical Equal Area, Mercator, and Orthographic to [Appendix F, Grid Mappings](#). (Trac ticket #34).

12 December 2008

1. Fixed defect in Mercator section of [Appendix F, Grid Mappings](#) by updating to version 12 of Grid Map Names (see <http://cf-trac.llnl.gov/trac/wiki/GridMapNames?version=12>).

27 February 2009

1. Fixed defect by clarifying that coordinates indicate gridpoint location in [Chapter 4, Coordinate Types](#). (Trac ticket #44).
2. Fixed defect of outdated Conventions attribute. (Trac ticket #45).

25 October 2010

Minor revisions requested by Jonathan Gregory. Revisions 33 and 49 were closed after discussions; the rest had elicited no objections.

1. Ticket 33, cell\_methods for statistical indices
2. Ticket 49, clarification of flag\_meanings attribute
3. Ticket 58, remove deprecation of "missing\_value" attribute
4. Ticket 57, fix for broken URLs in CF Conventions document
5. Ticket 56, typo in CF conventions doc
6. Ticket 51, syntax consistency for dimensionless vertical coordinate definitions
7. Ticket 47, error in example 7.4
8. Changed document version to 1.5.
9. New chapter, ticket 37 Changed document version to 1.6.

22 June 2011

Ticket 37. Added Chapter 9, Discrete Sampling Geometries, and a related Appendix H, and revised several other chapters.



5 December 2011

In Appendix H (Annotated Examples of Discrete Geometries), updated standard names "station\_description" and "station\_wmo\_id" to "platform\_name" and "platform\_id".

23 December 2015

Re-do several changes which had previously been made in an earlier draft of version 1.7:

1. Ticket 61, two new cell methods in Appendix E.
2. Ticket 64, section 7.3 editorial correction, replace "cell\_bounds" with "bounds".
3. Ticket 65, add range entry in Appendix E.
4. Ticket 69. Added Section 5.6.1, Use of the CRS Well-known Text Format and related changes.
5. Ticket 93, Added two new dimensionless coordinates to Appendix D.

20 January 2016

1. [Ticket 67](#), remove deprecation of "missing\_value" from [Appendix A, Attributes](#).
2. [Ticket #71](#), correction of [Vertical perspective](#) projection.

29 February 2016

1. [Ticket 103](#) updated Type and Use values for some attributes in [Appendix A, Attributes](#) and added "special purpose" value. In [Appendix H, Annotated Examples of Discrete Geometries](#), updated coordinate values for the variables in some examples to correct omissions.

30 March 2016

1. [Ticket 141](#), update affiliation organisations for Jonathan Gregory and Phil Bentley.

27 July 2016

1. [Ticket 31](#), add new attribute **actual\_range**.

7 February 2017

1. renamed Appendix G to Revision History, as in Trac Ticket 73.
2. revised section 3.3 for Trac ticket 123.

14 February 2017

1. Ticket #118, Add geoid\_name and geopotential\_datum\_name to the list of Grid Mapping Attributes.
2. Ticket #148, Added maximum\_absolute\_value, minimum\_absolute\_value and mean\_absolute\_value to cell methods in Appendix E
3. Ticket #149, correction of standard name in example 7.3

15 February 2017

1. Ticket #77, Add sinusoidal projection
2. Ticket #87, Allow comments in coordinate variables
3. Ticket #92, Add oblique mercator projection
4. Ticket #72, Adding the geostationary projection.

*16 February 2017*

1. Ticket #103, Corrections to Appendices A and H, finish the ticket with remaining changes to Appendix H.

*21 February 2017*

1. Ticket #74, Removed "sea\_water\_speed" from flag values example and added Note at bottom of Example 3.3 in Chapter 3. Also added a sentence to Appendix C Standard Name Modifiers "number of observations" and a sentence to "status\_flag\_modifiers"

*7 March 2017*

1. Ticket #145, Add new sentence to bottom of Section 7.2, Add new Section 2.6.3, "External variables", Add "External variable" attribute to Appendix A.

*08 March 2017*

1. Ticket #85, Added sentence to bottom of first para in Section 9.1 "Features and feature types". Added Links column in Section 9.1 Replaced first para in Section 9.6. "Missing Data". Added verbiage to Section 2.5.1, "Missing data...". Added sentence to Appendix A "Description" "missing\_value" and "Fill\_Value".
2. Ticket #143, Supplement the definitions of dimensionless vertical coordinates

*09 March 2017*

1. Ticket #75, fix documentation and definitions of 3 grid mapping definitions

*23 March 2017*

1. Ticket #109, resolve inconsistency of positive and standard\_name attributes (section 4.3)
2. Ticket #76, More than one name in Conventions attribute (section 2.6.1)
3. Ticket #138, Clarification of false\_easting / false\_northing (Table F.1)
4. Ticket #86, Allow coordinate variables to be scaled integers, affects two table rows in Appendix A.

*27 March 2017*

1. Ticket #80, added attributes to AppF Table F1, changes in section 5.6 and 5.6.1.

*28 March 2017*

1. Ticket #102, additional cell\_methods, changes in Appendix E and section 7.3
2. Ticket #104, Clarify the interpretation of scalar coordinate variables, changes in sections 5.7 and 6.1

*06 April 2017*

1. Ticket #70, Connecting coordinates to Grid Mapping variables: revisions in Section 5.6 and Examples 5.10 and 5.12

*25 April 2017*

1. Ticket #100, Clarifications to the preamble of sections 4 and 5.

*29 June 2017*

1. Ticket #140, Added 3 paragraphs and an example to Chapter 7, Section 7.1.

*18 July 2017*

1. a few formatting tweaks
2. Where appropriate, changed document version from 1.6 to 1.7, and 1.7 (DRAFT) to 1.7.

*1 August 2017*

1. Updated the links and references to NUG (The NetCDF User Guide), to refer to the current version.
2. Trivial updates to links for COARDS and UDUNITS in the bibliography.

*10 August 2017*

1. Updated use of WKT-CRS syntax.

*17 October 2017*

1. Ticket #164, New Geometries section 7.5.

*13 December 2017*

1. Ticket #164, Implement suggestions from trac ticket comments.

*24 January 2018*

1. Ticket #164, If coordinates attribute is carried by geometry container, require coordinate variables which correspond to node coordinate variables to have the corresponding axis attribute.

*24 January 2018*

1. Ticket #164, Remove geometry attribute from lat/lon variables in examples.

*20 April 2018*

1. Ticket #164, Add Tim Whiteaker and Dave Blodgett as authors.

*09 May 2018*

1. Ticket #164, Replace axis with bounds for coordinate variables related to geometry node variables.

*25 June 2018*

1. Ticket #164, Add bounds attribute to first geometry CDL example.

*14 November 2018*

1. [Pull request #146](#): Typos (plural dimensions) in section H

*15 May 2019*

1. [Issues #155](#), [#156](#): Allow alternate grid mappings for geometry containers. When node\_count attribute is missing, require the dimension of the node coordinate variables to be one of the dimensions of the data variable.

*17 July 2019*

1. [Pull request #142](#): Fix bad reference to an example in section 6.1 "Labels".

*17 July 2019*

1. [Issue #128](#): Add definition of 'name\_strlen' dimension where missing in Appendix H CDL examples.

*17 July 2019*

1. [Issue #144](#): Add [support for using groups](#).

*22 July 2019*

1. [Issue #136](#): Missing trajectory dimension in H.22

*22 August 2019*

1. [Issue #186](#): Minor corrections to Example 5.10, Section 9.5 & Appendix F

*10 September 2019*

1. [Issue #139](#): Added support for variables of type string.

*10 September 2019*

1. [Issue #139](#): Added support for variables of type string.

*10 September 2019*

1. [Issue #179](#): Don't require longitude and Latitude for projected coordinates.

*10 September 2019*

1. [Issue #198](#): Clarification of use of standard region names in "region" variables.

*10 September 2019*

1. [Pull request #202](#): Fix Section 7 examples numbering in the list of examples

*28 December 2019*

1. [Issue #213](#): Missing `s` in grid mapping description texts.

*29 December 2019*

1. [Issue #203](#): Clarifications to use of groups.

*11 January 2020*

1. [Issue #218](#): Taxon Names and Identifiers.

*28 January 2020*

1. [Issue #212](#): Inconsistent usage of false\_easting and false\_northing in grid mappings definitions and in examples

*30 January 2020*

1. [Issue #223](#): Axis Order for CRS-WKT grid mappings

*20 February 2020*

1. [#230](#) - Correct inconsistency in units or geostationary projection

*2 June 2020*

1. [Issue #259](#): Clarify geostationary projection items

*11 June 2020*

1. [Issue #193](#): Added two figures to clarify order of vertex coordinates in lon/lat bnds variables

*6 July 2020*

1. [Issue #222](#): Allow CRS WKT to represent the CRS without requiring reader to compare with grid mapping parameters.

*15 July 2020*

1. [Issue #284](#): Example 6.1.2 not listed in list of examples

*15 July 2020*

1. [Issue #288](#): Third table in section 9.3.1 list four elements but related text and other table mention three elements

*23 November 2020*

1. [Issue #301](#): Introducing a CF domain variable.

*28 September 2020*

1. [Issue #273](#): State the principles for design of the CF conventions

*06 March 2021*

1. [Issue #304](#): Clarify some formula terms definitions

*10 March 2021*

1. [Issue #313](#): Clarification of the handling of leap seconds

*6 April 2021*

1. [Issue #320](#): How to Report Uncertainty Chapter

# Bibliography

## References

- [COARDS] [Conventions for the standardization of NetCDF Files](#) . Sponsored by the "Cooperative Ocean/Atmosphere Research Data Service," a NOAA/university cooperative for the sharing and distribution of global atmospheric and oceanographic research data sets . May 1995.
- [FGDC] [Content Standard for Digital Geospatial Metadata](#) . Federal Geographic Data Committee, FGDC-STD-001-1998 .
- [GUM] [Evaluation of measurement data — Guide to the expression of uncertainty in measurement](#) . Joint Committee for Guides in Metrology, JCGM 100:2008.
- [NetCDF] [NetCDF Software Package](#) . UNIDATA Program Center of the University Corporation for Atmospheric Research.
- [NUG] [The NetCDF User's Guide](#) for NetCDF version 4.4.1.1.
- [OGC\_WKT-CRS] [OGC Well-known text representation of coordinate reference systems](#) . OGC document 12-063. 1st May 2015.
- [OGP-EPSG] [OGP Surveying & Positioning Committee and EPSG Geodetic Parameter Registry](#) .
- [OGP-EPSG\_GN7\_2] [OGP Surveying and Positioning Guidance Note 7, part 2: Coordinate Conversions and Transformations including Formulas](#) .
- [SCH02] C Schaer, D Leuenberger, and O Fuhrer. 2002. "A new terrain-following vertical coordinate formulation for atmospheric prediction models". *Monthly Weather Review* . 130 . 2459-2480.
- [Snyder] [Map Projections: A Working Manual](#) . USGS Professional Paper 1395.
- [UDUNITS] [UDUNITS Software Package](#) . UNIDATA Program Center of the University Corporation for Atmospheric Research .
- [W3C] [World Wide Web Consortium \(W3C\)](#) .
- [XML] [Extensible Markup Language \(XML\) 1.0](#) . T. Bray, J. Paoli, and C.M. Sperberg-McQueen. 10 February 1998 .
- [CFDM] [A data model of the Climate and Forecast metadata conventions \(CF-1.6\) with a software implementation \(cf-python v2.1\)](#) . Hassell, D., Gregory, J., Blower, J., Lawrence, B. N., and Taylor, K. E.: Geosci. Model Dev., 10, 4619-4646, <https://doi.org/10.5194/gmd-10-4619-2017>, 2017.