Microsoft Visual Studio Image Library 2017

Use Instructions:

Some of these images are offered in various sizes and color schemes although only preview image is displayed in the table below. The same usage restrictions apply to all variations of a given image. As part of a visual language, the following images (or any part of the images) must be used in a manner consistent with the image name or concept description indicated below. Icon image files are sorted in the **VS2017** folder. Each icon folder name matches the icon concept name you can find in below table.

∠ Search		
Name	lcon	Description
1x	1 x	100% scale
2Columns		Used for setting layout.
2ColumnsLeftSplit	\Box	Used for setting layout.
2ColumnsRightSplit		Used for setting layout.
2Rows		Used for setting layout.
2Rows2Columns	\blacksquare	Used for setting layout.
2RowsBottomSplit		Used for setting layout.
2RowsTopSplit		Used for setting layout.
2x	2 X	200% scale
3Columns		Used for setting layout.
3DCameraOrbit		Used in graphics tools for rotating camera orbit.

Accelerator	= 0	Represents the accelerator function in devices.
Accessibility	()	The common symbol for accessibility.
Accordion		Refer to the icon name
Account	ΩĪ	Represents user account or log-in information.
AccountAttribute	Q	Refer to the icon name
AccountGroup	χĒ	Refer to the icon name
Action	 	Automated actions. Also used for Macro symbol in intelliSense.
ActionFriend	 	Used in intelliSense
ActionLog		Refer to the icon name
ActionPrivate	>	Used in intelliSense
ActionProtected	▶	Used in intelliSense
ActionSealed	 	Used in intelliSense
ActionShortcut	>	Used in intelliSense
ActionTool		Refer to the icon name
ActiveDocumentHost		Refer to the icon name
ActiveEnvironment	7	Used in Python Tools to represent an active environment.
ActiveErrorSquiggle	abc	Used to represent the squiggle showing when there is active syntax error.
ActiveServerApplication		ASP application.

ActiveXControl	X	Represents an Active X control.
Activity	<u>(5)</u>	Workflow activity, or reconcile changes
rectivity	(6,	between local version and server version.
ActivityDiagram	\$\frac{1}{2}	Represents an activity type diagram.
Activity Final Nodo Tool		Represents the final node used in an
ActivityFinalNodeTool		activity diagram.
ActivityMonitorTab	Ō	Refer to the icon name
ActivityParameterNodeTool	4. 1	Represents the parameter node used in
ActivityParameterNode1001	<u></u>	an activity diagram.
Actor	*	Actor role in workflow diagram.
AdaptivaTriggar	4	An adaptive trigger actives a state
AdaptiveTrigger	L 7 J	whenever the window dimension
		conditon is hit.
Add	+	Used for adding items.
AddAgent		Refer to the icon name
AddAssociation	+ /	Refer to the icon name
AddATLSupportToMFC	ATI.	Refer to the icon name
A -l -l A44l	+31	Used for adding attachment as opposed
AddAttachment	U	to deleting attachment. When there is
		only one control to add attachment, you
		can use the Attachment icon by itself.
AddAttribute	•@	Add attribute, field value, parameter.
AddAzureResource	*	Add Azure Resource to the account.
AddBehavior		Refer to the icon name

thr. // a - all b - at 2000/

	*		
AddBinaryFile	01	Refer to the icon name	
AddBottomFrame	<u>*</u> =	Refer to the icon name	
AddBuildQueue	智	Used for adding a new build to the queue.	
AddButton	さか	Refer to the icon name	
AddCalculate		Refer to the icon name	
AddCellToLeft	8	Insert cell to the left of current cell	
AddCellToRight	₽=	Insert cell to the right of current cell	
AddChildNode	+ _ →=	Used for adding child nodes to the current parent node.	
AddClass	+	Refer to the icon name	
AddClause	+_	Add clause to build queries.	
AddCloudConnectedServices	Ċф	Used for adding Azure Services to the current project.	
AddColumn	췝	Add table column.	
AddColumnToLeft	4	Insert a column to the left of current column.	
AddColumnToRight	+	Insert a column to the right of current column.	
AddComment	t ;=	Add comment to a discussion thread, not comment code block.	
AddComponent	1	Refer to the icon name	
AddConditionalLoop		Refer to the icon name	

	<u></u>	
AddConditionalRule	‡	Refer to the icon name
AddConnection	* ¢	Add connection as opposed to disconnect from a remote service. When there is only one control for adding connection, you may use the Connect icon by itself.
AddControl	Ħ	Add control.
AddCustomControl		Add custom control
AddDatabase	+	Add database.
AddDataItem	:	Add data item.
AddDataSource		Add data source.
AddDelegationTool	+7	Refer to the icon name
AddDependencyGraph	忆	Add Dependency type graph.
AddDependencyGraphAncestor	凮	Add Dependency type graph with ancestor.
AddDictionary	<u>t</u> o	Add dictionary
AddDimension		Add dimention.
AddEvent	+5	Add event.
AddEventTracepoint	*	Used in stepping debug for adding an event tracepoint.
AddField	*=	Add a property field.
-		

AddFile	ተ ግ	Refer to the icon name
AddFolder	t	Refer to the icon name
AddFont	‡ A	Refer to the icon name
AddForm	檀	Refer to the icon name
AddGroupBox	+XY	Refer to the icon name
AddHTMLPage	+	Refer to the icon name
AddImage	*	Can also be used for adding project resources.
Addln	•	Represents add-on, plug-in.
AddIndexer	tı	Refer to the icon name
AddInheritance	+ ×	Add inheritance relationship.
AddInheritedControl	ti	Add a control with inherited attributes from parent.
AddInheritedForm	ta	Add a form with inherited attriutes from parent form.
AddInterface	÷••	Refer to the icon name
AddItem	*a	Refer to the icon name
AddKeyframe	+	Add key frame to timeline.
AddLayoutItem		Refer to the icon name
AddLeftFrame	÷=	Refer to the icon name
AddLink		Used for adding links as oppsed to

t _e	deleting links. Use the Link icon by itself for obtaining links.
	Add link to bug.
*2	Add live data source as opposed to local, static data source files.
*	Add local server as opposed to remote server.
擅	Refer to the icon name
5	Refer to the icon name
†	Refer to the icon name
₩	Refer to the icon name
the state of the s	Refer to the icon name
*{ }	Refer to the icon name
諨	Add table nested within another table.
‡o	Refer to the icon name
(+)	This is often used in an icon button where no text label is shown.
†	Refer to the icon name
@]	Refer to the icon name
九	Add parent node above the current child.
1	Refer to the icon name
	して 対 は な は は は は は は は は は は は は は

AddProperty	+50	Refer to the icon name
AddQuery		Refer to the icon name
AddReference	ž _{ili}	Refer to the icon name
AddRelationship	智	Refer to the icon name
AddRemoteServer	*=	Add remote server as opposed to local server.
AddRemoveColumns	īŽī	Add removed columns back, or insert cut columns from clipboard.
Address	E.	Address type input field.
AddressEditor		Refer to the icon name
AddRightFrame	Ť.	Refer to the icon name
AddRow	包	Add row to table.
AddRowToAbove	1	Add row above the current row.
AddRowToBelow	-Q-	Add row below the current row.
AddScreen	*-	Used in Storyboard for adding a screen.
AddState	†	Add state to timeline.
AddStateGroup	‡	Add a group of state to timeline.
AddStyleRule	† A	Add styling rules.
AddTable		Refer to the icon name
AddTablet		Refer to the icon name

	<u> </u>		
AddTeamProject		Refer to the icon name	
AddTest	Ż	Can also be used for attaching test to existing projects.	
AddTestGroup	<i>5</i> .	Can also be used for attaching a group of test cases to existing projects.	
AddTextFile	†	Refer to the icon name	
AddToCollection	节	Can also be used for adding a collection of items.	
AddToFavorites	**	When there is only one control for toggling between add and remove favorites, you may use the Favorite icon by itself.	
AddTopFrame	2	Refer to the icon name	
AddToSolutionExplorer	>	Add current file to Solution Explorer tree view.	
AddTransform	* _	Refer to the icon name	
AddTransition	+	Refer to the icon name	
AddUser	* A	Refer to the icon name	
AddVariable	*	Refer to the icon name	
AddWatch	*	Add watch to current debug session. If there is no need to specify add vs. remove, you may use the Watch icon by itself.	
AddWebApplication		Refer to the icon name	
AddWebService	*	Refer to the icon name	

AddWebUserControl	+ 2	Refer to the icon name
AdjustmentLayer	D	A design tool to create and configue adjustment layer.
AdRotator		Ad rotator control.
AdvancedView		Refer to the icon name
Aggregate	(:³)∑	Can be used for aggregation and sum related concepts.
AggregateAdvancedView	$lackbox{\Phi}_{\Sigma}$	Refer to the icon name
AggregateDesign]]	Refer to the icon name
AggregateDesignUndefined	Ξ}Σ	Refer to the icon name
AggregateFunctionError	(:⊗	Refer to the icon name
Aggregate Function Warning	{ : }∑	Refer to the icon name
AggregationCopy	} Σ',	Can be used for multiple aggregation items or create a copy of an aggregation item.
AirbrushTool	K	A design tool to spray color into an area.
Alert	•	Can also be used for push notifications.
AlignBoth	· -	Align both vertically and horizontally.
AlignBottom	<u>lı</u>	Align objects to the bottom.
AlignLeft		Align objects to the left.
AlignRight		Align objects to the right.
-		

AlignStretchHorizontal	=	Align horizontally and strech to fit the same width.	
AlignStretchVertical	Π	Align vertically and strech to fit the same height.	
AlignToGrid	╆	Align objects to grid.	
AlignTop	ΤŢ	Align objects to the top.	
All		Export all log.	
AllFieldsfromDataSource	E	Indicates that all fields are from data source.	
AllLoadedTests	The state of the s	Indicates a collection of test loaded to the current scope.	
AlphaChannel	A	A design tool to view and configue alpha channel for opacity.	
AlphaTest	•	This icon shape is generic so the usage is not limited to what is indicated in the name.	
AlwaysVisible	平	Pin the item so that it is always visible.	
Analysis		Used for performance analysis.	
AnalysisServerConnection		Refer to the icon name	
AnalyzeTrace	₹ Z	Used for viewing detailed performance analytics data.	
Animation	=>	A Blend design tool to create animation. Can also be used for Quick Access.	
AnimationError	= \overline{8}	Refer to the icon name	
APIApplication	• •O	A type of Azure app/resource	
AppearanceEditorPart	A	A component part for editing apperance, styling.	

Appearance Tab Auto		Used in Designer view Appearance tab. Sets the alignment behavior to auto.
AppearanceTabGrid	Ш	Used in Designer view Appearance tab. Sets the alignment behavior to align to grid.
AppearanceTabGuide	+	Used in Designer view Appearance tab. Sets the alignment behavior to align to user created guides.
AppearanceTabNone		Used in Designer view Appearance tab. Sets the fill or outline color to none.
AppearanceTabSolid		Used in Designer view Appearance tab. Sets the fill or outline color to none.
AppearanceTabSwatch		Used in Designer view Appearance tab. Color swatch. This icon shape is generic so the usage is not limited to what is indicated in the name.
AppFlyout		A flyout layout is a panel that pops out of the main app container.
AppForOfficeExcelContent	==	An embedded app inside Excel content.
AppForOfficeTaskPane		An embedded app in Office application task pane.
Application		Can also be used for application window or generic project.
ApplicationAccess	<u></u>	The access policy, permission, authoriation related settings of an application.
ApplicationBar	•••	This icon shape is generic so the usage is not limited to what is indicated in the name.
ApplicationBarCommand	0	Refer to the icon name
ApplicationBarMenu	<u>=</u>	Refer to the icon name
ApplicationBehaviorSettings	☆ _	Used in VS Project System Extensibility. A type of item template where you can

define what behaviors are available in the

		project type.
Application Class		Refer to the icon name
ApplicationConnectionDiagram	맴	A diagram shows the relationship among several applications.
ApplicationGroup	₽	Used for a group of applications.
ApplicationInstalled		Indicates that the application, template, or extension is installed on your local computer.
ApplicationRole		Refer to the icon name
ApplicationRoleError	\(\rightarrow\)	Refer to the icon name
ApplicationRoleWarning	Q <u>.</u>	Refer to the icon name
ApplicationRunning		Indicates that the application is running.
ApplicationServiceOK	=	Indicates the status of application service is positive.
ApplicationTemplate		A generic application template for bootstraping project.
ApplyCodeChanges	<u>/=</u>	Apply pending changes to code.
ApplyStyle	\	Apply pending changes to style.
AppOnlySequence	<u>;</u>	Refer to the icon name
AppRoot		The root location of application. Can also be used for application resource location on server.
ArchitectureExplorer	品	Shows the application architecture in an explorer tool window.
ArcSegment		A Blend design tool to draw arc segment.

)	
AreaChart		A chart type with filled areas.
Arrange	144	Arrange the sequence of objects.
ArrangeSelection	7 :3	Refer to the icon name
ArrangeShape	•••	Arrange the sequence of objects.
ArtboardSnapLine		Indicates the default state of artboard snap lines.
ArtboardSnapLineOff	+	Indicates the artboard snap lines are turned on.
ArtboardSnapLineOn	+	Indicates the artboard snap lines are turned off.
ArtboardSplit	<u> </u>	Split artboards. This icon shape is generic so the usage is not limited to what is indicated in the name.
ASCancelQuery	9	Stop running queries.
Aserif	A	Used for Serif font. Can also be used for setting font family.
ASPXFile		Can also be used for web related file types.
ASPNETGenericHandlerFile		Can also be used for web related source code files.
ASPNETRazorFile	@	Refer to the icon name
ASPNETWeb		Can also be used for generic web and browser.
ASPNETWebApplication		Can also be used for generic web applications.
AssemblerSourceFile	ASM	Refer to the icon name

Assembly		This icon shape is generic so the usage is not limited to what is indicated in the name.	
AssemblyError		Indicates the status of assembly is negative and critical.	
AssemblyExclude		Indicates the status of assembly is excluded or not available.	
AssemblyInfoFile	i	Indicates the status of assembly is neutrual but there is helpful information provided.	
AssemblyWarning		Indicates the status of assembly is negative but not as critical as error.	
Assign	A ← B	Represents variable assignment.	
AssignBuild	***	Refer to the icon name	
AssignedParts	√ <u>2</u>	Refer to the icon name	
AssignTesterToTest	Z	Can also be used for manual testing that requires user intervention.	
AssociationControl	\leftarrow	A control to create association between objects.	
Association Control Group	←	A control to create multiple association between objects.	
Association Editor	₹ <u>E</u>	An editor for setting association.	
AssociationLine	←_	Lines showing association relationship among objects.	
AssociationRelationship	~	Generic association line.	
Asterisk	*	Usually used in form field validation for required fields. Can also be used literally as asterisk character.	
AsymmetricKey	<u></u>	Used in a datatable to represent asymmetric key fields.	

AsymmetricKeyWarning Indicates the status of asymmetric key is negative but not as critical as error. Refer to the icon name ATL ACTIVE Template Library. Refer to the icon name	
ATL Application Perfect to the icon name	
ATI Application Pefer to the icon name	
ATLApplication Refer to the icon name	
ATLASPComponent Refer to the icon name	
ATLComponent Refer to the icon name	
ATLControl Refer to the icon name	
ATLDialog Refer to the icon name	
ATLEvent Refer to the icon name	
ATLFile Refer to the icon name	
ATLProperty Refer to the icon name	
ATLServer Refer to the icon name	
ATLSimpleObject Refer to the icon name	
ATLWebService Refer to the icon name	
Attach Represents attachment. Can be used as an action button to add new attachment, or show current attachment.	
AttachedProps Refer to the icon name	

AttachStyleSheet		Attach stylesheet to the content.
Attribute	@	Can also be used for variable placeholder, or used literally as @ character.
AttributeGridKeyDisabled		Refer to the icon name
AttributePicker	0 ×	Refer to the icon name
AttributeRelationshipEditor		Refer to the icon name
Audio	+	Can be used to represent Audio as a device, or as a toggle icon when volume is 0 together with AudioOn.
AudioMute		Use this icon when you need to emphasize on Audio device is muted or disabled.
AudioOn	# ¢	Often used together with Audio to indicate audio is on or volume is not 0.
AudioPlayback	,	Refer to the icon name
AudioRecording		Refer to the icon name
AutoArrangeShapes	<u>+</u>	A desgin tool that auto arrange shapes.
AutoComplete		Used to represent combo box control auto complete feature.
AutoFilter	I»I.	The Action modifier icon represents Macro, recorded actions.
AutoFormatTable	>	The Action modifier icon represents Macro, recorded actions.
AutomergeAll	1+1	The Action modifier icon represents Macro, recorded actions.
AutoscrollToCurrentFrame	밥	The Action modifier icon represents Macro, recorded actions.
AutosizeColumn		The Action modifier icon represents

	ᄖ	Macro, recorded actions.	
AutosizeFixedWidth	*	This icon shape is generic so the usage is not limited to what is indicated in the name.	
AutosizeOptimize	K 7 L 7	Auto optimize size according to screen/window. Can also be used for expanding a window to full screen.	
AutosizeStretch	⟨⇔ }	Strech content to fit container width.	
AutoSum	Σ	Similar to Excel AutoSum function.	
AutosWindow	E	The tool window that displays automation process.	
AutoTest		The Action modifier icon represents Macro, recorded actions.	
AutoThumbnail		Automatically generates thumbnail from image.	
AvailabilityColumnChart	ıdı	This icon shape is generic so the usage is not limited to what is indicated in the name.	
Axis		Refer to the icon name	
AxisX	<u> </u>	X axis in a data grid.	
AxisY	I	Y axis in a data grid.	
AzureAPIApp		Azure API App resource type.	
AzureAPIManagement	\$	Azure API Management resource type.	
AzureAvailabilitySet		Azure Availability Set resource type.	
AzureBlob		Azure Blobs resource type.	
AzureCloudBlobs		This icon shape is generic so the usage is	

	→ □	not limited to what is indicated in the name.
AzureCloudSearch	@	Azure Cloud Search resource type
AzureDataFactory	M	Refer to the icon name
Azure Data Factory App		Azure Data Factory app project template.
Azure Default Resource	•	This icon shape is generic so the usage is not limited to what is indicated in the name.
Azure Deployment Slots		Azure Deployment Slots
AzureDocumentDB		Azure DocumentDB resource type
AzureEventHub	噩	Azure Event Hub resource type
AzureGateway	※	Azure Gateway resource type
AzureKeyVault	(4)	Azure Key Vault resource type
AzureLoadBalancer	�	Azure Load Balancer resource type
AzureLogicApp	{ <u>.</u> }	Azure Logic App resource type
AzureMobileApp	\$	Azure Mobile App resource type
AzureMySQLDatabase	MÄ	Azure MySQL database
AzureNetworkInterface		Azure Network Interface resource type
AzureNetworkSecurityGroup	4	Azure Network Security Group resource type
AzureNotificationHub		Azure Notification Hub resource type

Azure Operational Insights		Azure Operational Insights resource type
AzureRedisCache	3	Refer to the icon name
AzureReservedIPAddress	•••	A type of Azure app/resource
AzureResourceGroup		Refer to the icon name
AzureResourceTypeView		Refer to the icon name
AzureRunbook	数	Azure Runbook resource type
AzureSchedulerJob		Azure Scheduler Job resource type
AzureServiceBus		Refer to the icon name
AzureSQLDatabase	501	Refer to the icon name
AzureSQLDataWarehouse		Azure SQL Data Warehouse resource type
AzureSQLElasticDataPool	\$	Azure SQL Elastic Data Pool resource type
AzureSQLFirewallRule	5m	Refer to the icon name
AzureSQLServer	5 Kộ:	Refer to the icon name
AzureStreamAnalytics	\$	Azure Stream Analyitcs resource type
AzureTeam	.	Azure Team
AzureVirtualMachine		A type of Azure app/resource
AzureVirtualMachineExtension	E .	Azure Virtual Machine Extension resource type
AzureVirtualNetworkIPAddress		A type of Azure app/resource


	<··>		
AzureWebHostingPlan		Azure Web Hosting Plan type resource.	
AzureWebJobs	(EG)	Azure WebJobs type resource.	
AzureWebsite		Azure Website type resource.	
AzureWebsiteCertificate		Azure Website Certificate type resource.	
AzureWebsiteConfig		Refer to the icon name	
AzureWebsiteExtension		Refer to the icon name	
AzureWebsiteServerFarm	8	Refer to the icon name	
BackgroundColor		A design tool that sets background color. Often used together with ForegroundColor.	
BackgroundWorker		This icon can also be used for background progress.	
Backslash	\	This icon shape is generic so the usage is not limited to what is indicated in the name.	
BackToResultList	自	When the current view is an item detail view, use this command to return to previous list view.	
Backward	•	Used for navigating to previous page.	
BalanceBrace	{≣}	Used for beautifying code.	
BarChart	E	Refer to the icon name	
BaseType	→	This icon shape is generic so the usage is not limited to what is indicated in the name.	

BasicContentApp		Embedded applet inside document content.
BatchCheckIn	^	Can also be used for batch upload.
BatchFile		File association icon for *.bat
BDCModelResourceFile		Refer to the icon name
BDCModelTemplate		Refer to the icon name
Behavior	<u></u>	Refer to the icon name
BehaviorAction	**	Refer to the icon name
BehaviorEditorPart		Refer to the icon name
BevelJoint	æ	Refer to the icon name
ВІ		Refer to the icon name
Bidirectional	2	Refer to the icon name
Binary	0101	Refer to the icon name
BinaryFile	01	Refer to the icon name
Binding	0 7	Refer to the icon name
BindingNavigator		Refer to the icon name
BindingSource	5	Refer to the icon name
Bios	3	Refer to the icon name
BirdEyeViewOff		Refer to the icon name

BirdEyeViewOn	F	Refer to the icon name
BitmapMask		Refer to the icon name
BlankApplication		Refer to the icon name
BlankFile	\mathbf{Z}	Refer to the icon name
BlankPhone		Refer to the icon name
BlankWeb	(4)	Refer to the icon name
BlendPhonePivot	B abc	Refer to the icon name
BlendSilverlightApplication	8	Refer to the icon name
BlendSketchflowApplication	B	Refer to the icon name
BlockError	8	Refer to the icon name
BlockSelection		Refer to the icon name
BlueChannel	В	Refer to the icon name
Bold	В	Refer to the icon name
Bolt	0	Refer to the icon name
Bookmark		Refer to the icon name
Bookmark Disable	ZZ.	Refer to the icon name
Bookmark Group Disable		Refer to the icon name


		,
	I	
BookmarkMainMenuTabItem		Refer to the icon name
BooleanData	←₽	Refer to the icon name
BorderElement	Ħ	Refer to the icon name
Borders		Refer to the icon name
BottomLeftOf2ColumnsLeftSplit	-	Refer to the icon name
BottomLeftOf2Rows2Columns		Refer to the icon name
BottomLeftOf2RowsBottomSplit		Refer to the icon name
BottomRightOf2Rows2Columns		Refer to the icon name
BottomRightOf2RowsBottomSplit		Refer to the icon name
BottomRowOf2RowsTopSplit		Refer to the icon name
BottomRowOfFourRows		Refer to the icon name
BottomRowOfThreeRows		Refer to the icon name
BottomRowOfTwoRows		Refer to the icon name
BoundCheckboxFieldColumn		Refer to the icon name
BoundImageColumn		Refer to the icon name
Вох		Refer to the icon name
BoxPlotChart		Refer to the icon name

	Αı	
	<u> </u>	
BPMNErrorEvent	(A)	Refer to the icon name
BPMNReceiveMessage	\checkmark	Refer to the icon name
Branch	abla	Refer to the icon name
BranchRelationship	昂	Refer to the icon name
BranchRelationshipChild	굨	Indicate that you are on a child branch.
BranchRelationshipCousin	L-= L-=	Indicate that you are on a cousin branch.
BranchRelationshipGroup	帚	Refer to the icon name
BranchRelationshipOK		Refer to the icon name
BranchRelationshipParent	-	Indicate that you are on a parent branch.
BranchRelationshipPermission	<u>-</u>	Security and inheritance related configurations for branch.
BranchRelationshipSibling	드	Indicate that you are on a sibling branch.
BranchRemote	K N	Refer to the icon name
BranchUploaded	X	Refer to the icon name
BreakpointBound	11)	Refer to the icon name
BreakpointConditional	+	Refer to the icon name
BreakpointDisable	0	Refer to the icon name
BreakpointDisabledXHR		Refer to the icon name

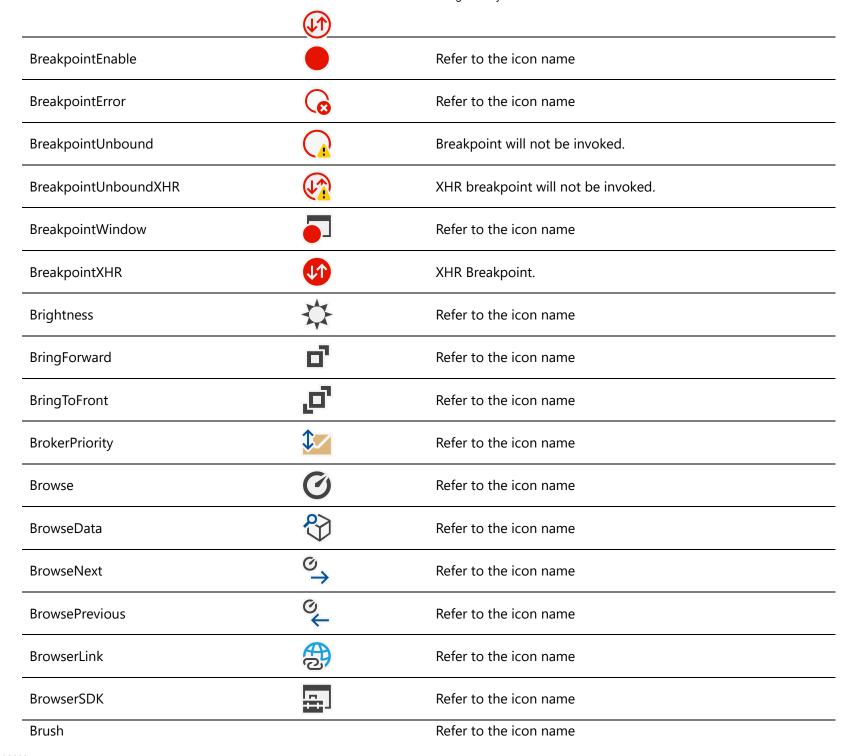

BrushXFormArrow		Refer to the icon name
BubbleChart		Refer to the icon name
Bug	į.	Refer to the icon name
BuildDefinition		Refer to the icon name
BuildDynamicValueGroup	₽	Refer to the icon name
Builder	T	Refer to the icon name
BuildErrorList	Ê	Refer to the icon name
BuildMatchAllFilter	Ŧ	Refer to the icon name
BuildQueue	뫈	Refer to the icon name
BuildSelection	*	Build only selected items.
BuildSolution	<u></u>	Refer to the icon name
BuildStyle	∀ <i>A</i>	Refer to the icon name
Bullet	•	Refer to the icon name
BulletList	Ξ	Refer to the icon name
BulletPanel	=	Refer to the icon name
Business	#	Refer to the icon name
BusinessObjectDatasource		Refer to the icon name

CalculatorMethod

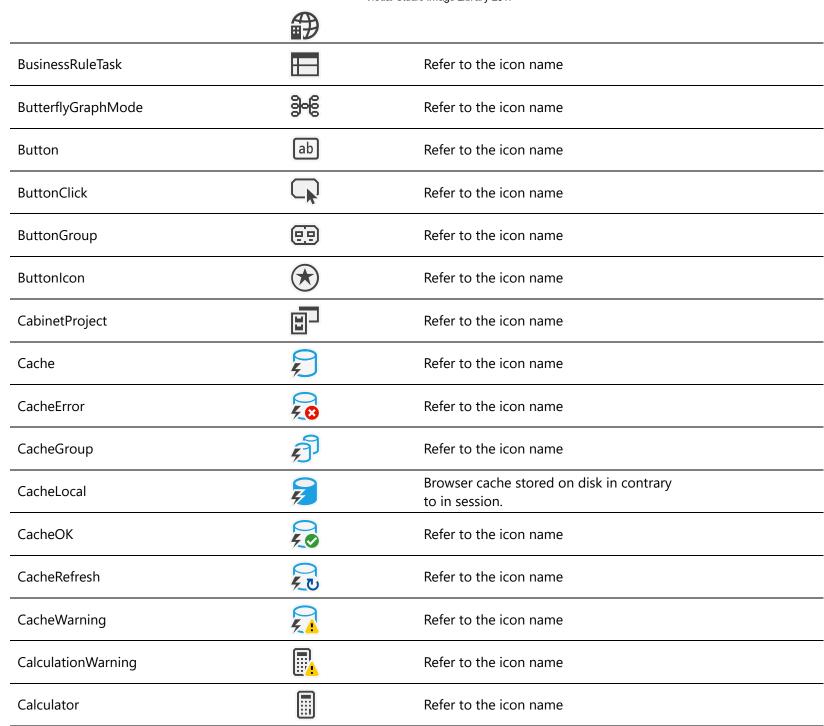


http://localhost:3000/

Refer to the icon name

Calendar	12	Refer to the icon name
Call		Refer to the icon name
CallBehaviorAction	m	Refer to the icon name
CallBrowser		Refer to the icon name
CallBrowserSetting	\$	Refer to the icon name
CallerOrCalleeView	(~	Refer to the icon name
CallFrom	(Refer to the icon name
CallFromMethod	€\$	Refer to the icon name
CallHierarchyView	2	Refer to the icon name
CallOperationAction	$\langle \rangle$	Refer to the icon name
Callout	Ţ.	Refer to the icon name
CalloutCloud	\$	Refer to the icon name
CalloutOval	P	Refer to the icon name
CalloutRectangle	\Box	Refer to the icon name
CalloutRoundRectangle	abla	Refer to the icon name
CallReturnInstructionPointer	\$	Refer to the icon name
${\it Call Return Instruction Pointer Switched Thre}$		Refer to the icon name

ad	5	
CallStackWindow		Refer to the icon name
CallThread	(>	Refer to the icon name
CallTo	> [Refer to the icon name
CallToMethod	→ \$	Refer to the icon name
Camera	•	Refer to the icon name
CameraOrbit	•	Refer to the icon name
Cancel	×	Refer to the icon name
CancelBuild	X. :	Refer to the icon name
CancellationScope	∑	Refer to the icon name
CancelPerformance	×	Refer to the icon name
CancelXSISchema	×	Refer to the icon name
CandleStickChart	••	Refer to the icon name
CanvasElement	0 0	Refer to the icon name
Caption	СС	Refer to the icon name
CaptionTag		Refer to the icon name
CaptureFrame	Õ	Refer to the icon name
Carousel		Refer to the icon name

	([)	
CascadingDropDown	□ ▼	Refer to the icon name
CaseLookupColumn	<u> </u>	Refer to the icon name
CaseSensitive	Aa	Refer to the icon name
CaseTable	fx-	Refer to the icon name
CaseTableColumn	f x	Refer to the icon name
CatalogError	8	Refer to the icon name
CatalogPolulation	<u> </u>	Refer to the icon name
CatalogPopulationError	: ■	Refer to the icon name
CatalogPopulationWarning	: □ : · · · · · · · · · · · · · · · · · · ·	Refer to the icon name
CatalogProperty	ţ -	Refer to the icon name
CatalogWarning	<u> </u>	Refer to the icon name
CatalogZone	口	Refer to the icon name
CategorizedView	0	Refer to the icon name
CategoryAxis		Refer to the icon name
CategoryPageItemTemplate	III	Refer to the icon name
CCTProject	=	Refer to the icon name
CD		Refer to the icon name

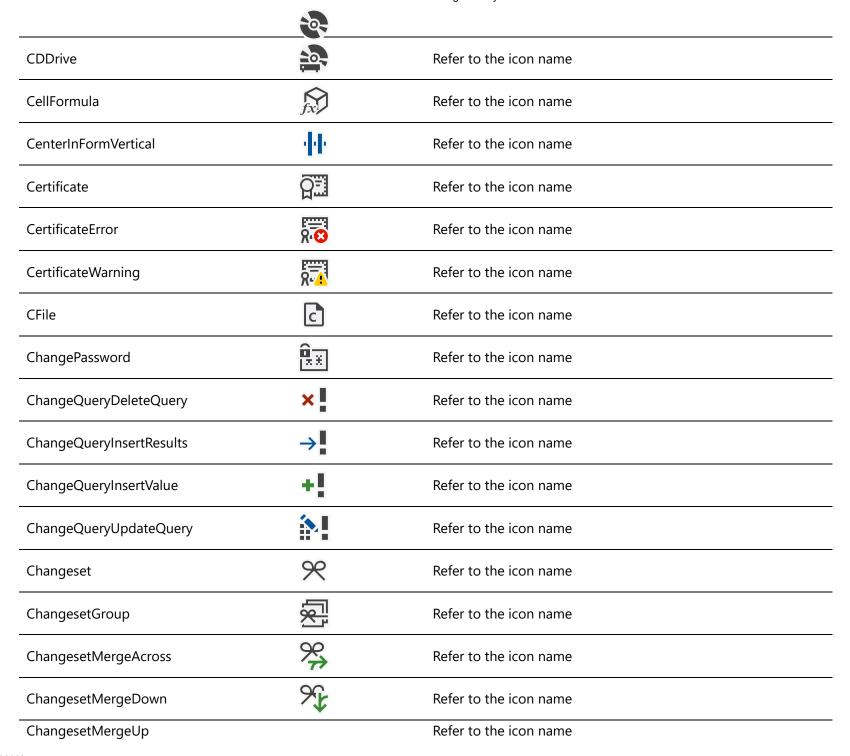

	92	,
	<u> </u>	
ChangeSourceControl	₩	Refer to the icon name
ChartFilter	長	Refer to the icon name
ChartWizard	•	Refer to the icon name
CheckAdd	₹	Refer to the icon name
Checkbox	✓	Refer to the icon name
CheckboxDisable	[X]	Refer to the icon name
CheckboxFieldColumn		Refer to the icon name
CheckboxFieldColumnUncheck	룝	Refer to the icon name
CheckboxGroup	回	Refer to the icon name
CheckboxList		Refer to the icon name
CheckboxMix		Refer to the icon name
CheckboxUncheck		Refer to the icon name
CheckboxUncheckCancel	П×	Refer to the icon name
CheckConstraint	[8]	Refer to the icon name
CheckConstraintError	[8]	Refer to the icon name
CheckConstraintGroup		Refer to the icon name
CheckDot		Refer to the icon name

Checkerboard		Refer to the icon name
CheckIn	^	Refer to the icon name
CheckInItem	^	Refer to the icon name
CheckInShelveset	*	Refer to the icon name
Checklist	* =	Refer to the icon name
Checkmark	~	Refer to the icon name
CheckOut	Ψ	Refer to the icon name
CheckOutItem	□	Refer to the icon name
Checkpoint	√₹	Refer to the icon name
CheckpointBuild	6	Refer to the icon name
ChildWindow		Refer to the icon name
ChildWindowTemplate		Refer to the icon name
Choose		Refer to the icon name
ChooseTarget	40	Refer to the icon name
Class	♦ LŞ	Refer to the icon name
ClassAdded	A.	Refer to the icon name
ClassDeleted		Refer to the icon name

ClassDetail	© :	Refer to the icon name
ClassFile		Refer to the icon name
ClassFriend	₹Ľ\$	Refer to the icon name
ClassLibrary		Refer to the icon name
ClassMethodReference		Refer to the icon name
ClassMethodReferenceAmbiguous	6	Refer to the icon name
ClassModify	PLY.	Refer to the icon name
ClassModifyTrivial	AL,	Refer to the icon name
ClassMoved	*C*	Refer to the icon name
ClassPrivate	ALY CO	Refer to the icon name
ClassProtected	*t* _*	Refer to the icon name
ClassRenamed	↑t	Refer to the icon name
ClassSealed	*t* ₀	Refer to the icon name
ClassShortcut	PLY.	Refer to the icon name
CleanData	Ø	Refer to the icon name
ClearBookmark	×	Refer to the icon name
ClearBreakpointGroup		Clear all breakpoints.

	×	
ClearCollection	* D	Refer to the icon name
ClearDictionary	× m	Refer to the icon name
Clear Message Queue	M	Clear/empty messages in an Azure Queue
ClearNavigateForward		Refer to the icon name
ClearTimelineSelection	ХШ	Refer to the icon name
ClearWindowContent	×	Refer to the icon name
ClickOnce		Refer to the icon name
ClientStatistcs		Refer to the icon name
CloakHide	**	Refer to the icon name
Close	×	Refer to the icon name
CloseDocument		Refer to the icon name
CloseDocumentGroup		Refer to the icon name
CloseGroup	×	Refer to the icon name
CloseLog	X=	Refer to the icon name
CloseSolution	X	Refer to the icon name
ClothPlus	,tr.	Refer to the icon name
Cloud		Refer to the icon name

CloudConnectedServices	(p)	Refer to the icon name
CloudConsole	E: \	Refer to the icon name
CloudDatabase		Refer to the icon name
CloudError	€	Refer to the icon name
CloudFile		Refer to the icon name
CloudFileServiceConfiguration	Ú	Refer to the icon name
CloudFolder		Refer to the icon name
CloudFolderOpen		Refer to the icon name
CloudGroup	8	Refer to the icon name
CloudOK		Refer to the icon name
CloudPackage		Refer to the icon name
CloudRefresh	€	Refer to the icon name
CloudRun	6	Refer to the icon name
CloudSearch	\$	Search Service
CloudServer		Refer to the icon name
CloudService	=	Refer to the icon name
CloudStaging		Refer to the icon name


	<u></u>	
CloudStagingOK	=0	Refer to the icon name
CloudStagingRefresh		Refer to the icon name
CloudStagingStopped	=	Refer to the icon name
CloudStop	6	Refer to the icon name
CloudWarning		Refer to the icon name
Cluster		Refer to the icon name
ClusterIndex	(品)	Refer to the icon name
ClusterIndexError	(E E	Refer to the icon name
ClusterIndexWarning	(<mark>昂</mark> .	Refer to the icon name
Code	¥	Refer to the icon name
CodeActivity		Refer to the icon name
CodeAnalysisConsole	<u>왕</u>)	Refer to the icon name
CodeAnalysisWindow	•	Refer to the icon name
CodeCoverage	=	Refer to the icon name
CodeCoverageDisable		Refer to the icon name
CodeDefinitionWindow	⟨⟩	Refer to the icon name
CodeInformation		Refer to the icon name


	6 .	
CodeLens	K	Refer to the icon name
CodeMetric		Refer to the icon name
CodeReview	۹	Refer to the icon name
CodeReviewDashboard	F	Refer to the icon name
CodeReviewWizard	檀	Refer to the icon name
CodeTest	<u> </u>	Refer to the icon name
Collapse		Refer to the icon name
CollapseChevronDown	~	Refer to the icon name
CollapseChevronDownGroup	₩	Refer to the icon name
CollapseChevronLeft	<	Refer to the icon name
CollapseChevronLeftGroup	<<	Refer to the icon name
CollapseChevronUp	^	Refer to the icon name
CollapseChevronUpGroup	^	Refer to the icon name
CollapseAll	司	Collapse all items in a tree view. Often used together with ExpandAll.
CollapsiblePanel	***	Refer to the icon name
Collection	ē	Refer to the icon name
CollectionPageItemTemplate		Refer to the icon name

ColorDialog		Refer to the icon name
ColorPalette	3	Refer to the icon name
ColorPicker	C.	Refer to the icon name
ColorScale		Refer to the icon name
ColorWheel		Refer to the icon name
Column		Refer to the icon name
ColumnChart	Iil	Refer to the icon name
ColumnComponent	日	Refer to the icon name
ColumnDetail	<u>Ş</u>	Refer to the icon name
ColumnError	- <u>×</u>	Refer to the icon name
ColumnGroup	iii	Refer to the icon name
ColumnKeyCheck	Ď	Refer to the icon name
ColumnKeyUncheck	Ü	Refer to the icon name
ColumnLabel		Refer to the icon name
ColumnLink	D	Refer to the icon name
ColumnMissing	智	Refer to the icon name
ColumnNullRatioProfile		Refer to the icon name


	[?]	
ColumnPatternProfile	<+>	Refer to the icon name
ColumnPredict		Refer to the icon name
ColumnPredictCheck		Refer to the icon name
ColumnPredictUncheck		Refer to the icon name
ColumnSetting	₩.	Refer to the icon name
ColumnWarning	-1	Refer to the icon name
ComboBox		Refer to the icon name
ComboBoxItem	富	Refer to the icon name
COMContractType		Refer to the icon name
Comma	,	Refer to the icon name
CommandColumnButton	8	Refer to the icon name
CommandUIOption	e di	Refer to the icon name
Comment		Refer to the icon name
CommentCode	Ē	Refer to the icon name
CommentGroup	Ĉ,	Refer to the icon name
CommentGroupHide	ÇP	Refer to the icon name
CommentLink		Refer to the icon name

Compare	Ŕ	Refer to the icon name
CompareBothDatabase	⇔	Refer to the icon name
CompareFolder	Q	Refer to the icon name
ComparePerformance	~ ~ ·	Refer to the icon name
CompareTargetDatabase	\(\)	Refer to the icon name
CompareValidator		Refer to the icon name
Compensate	Ţ	Refer to the icon name
CompilableFile	**	Refer to the icon name
Compile	利	Refer to the icon name
CompileMSHelpFile	2	Refer to the icon name
CompleteWord	A ≥	Refer to the icon name
CompletionMode	CFE .	Refer to the icon name
ComplexProperty	ई	Refer to the icon name
Component	А	Refer to the icon name
ComponentDiagram	₽,	Refer to the icon name
ComponentDownloadStatus	⊕↓	Refer to the icon name
ComponentFile		Refer to the icon name

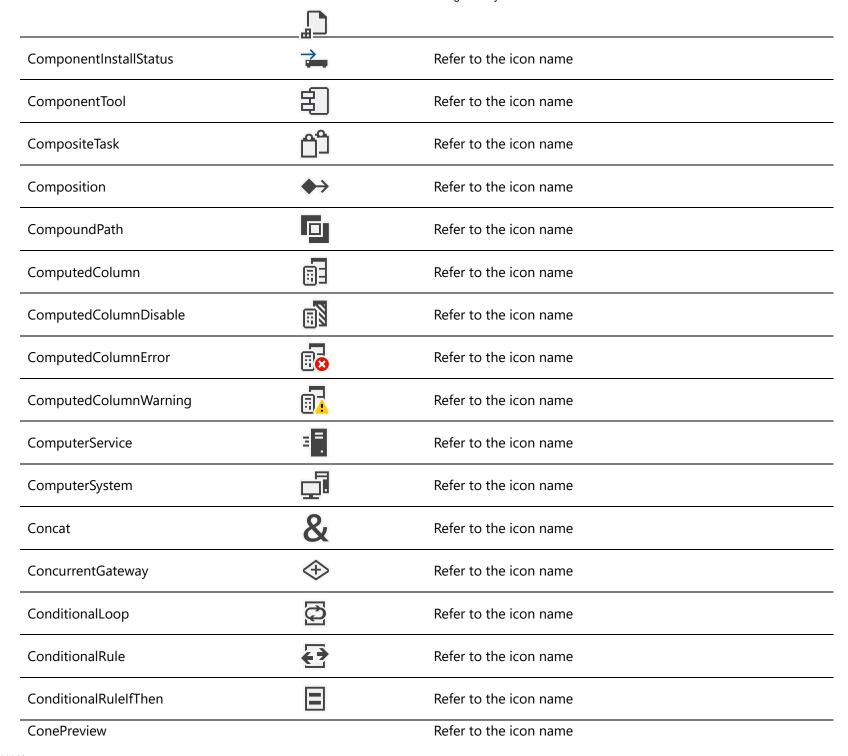

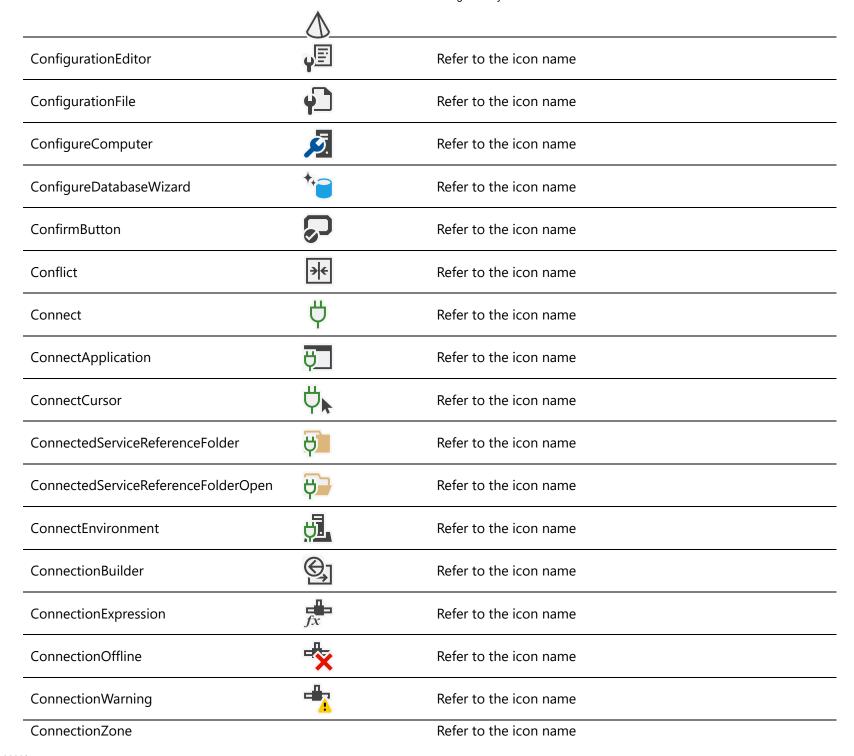

		•
	(+)	
Connector	7	Refer to the icon name
ConnectTestPlan	Ÿ =	Refer to the icon name
ConnectToDatabase	Ÿ <mark>a</mark>	Refer to the icon name
ConnectToRemoteServer	唱	Refer to the icon name
ConnectWeb	Ÿ ⊕	Refer to the icon name
Console	C:\	Refer to the icon name
ConsoleTest	CEX.	Refer to the icon name
Constant		Refer to the icon name
ConstantFriend	=	Refer to the icon name
ConstantPrivate		Refer to the icon name
ConstantProtected	=_*	Refer to the icon name
ConstantSealed		Refer to the icon name
ConstantShortcut		Refer to the icon name
ContactCard	RΞ	Refer to the icon name
Container		Refer to the icon name
Contains Dynamic Value Property	Ė	Refer to the icon name
ContentControlElement		Refer to the icon name

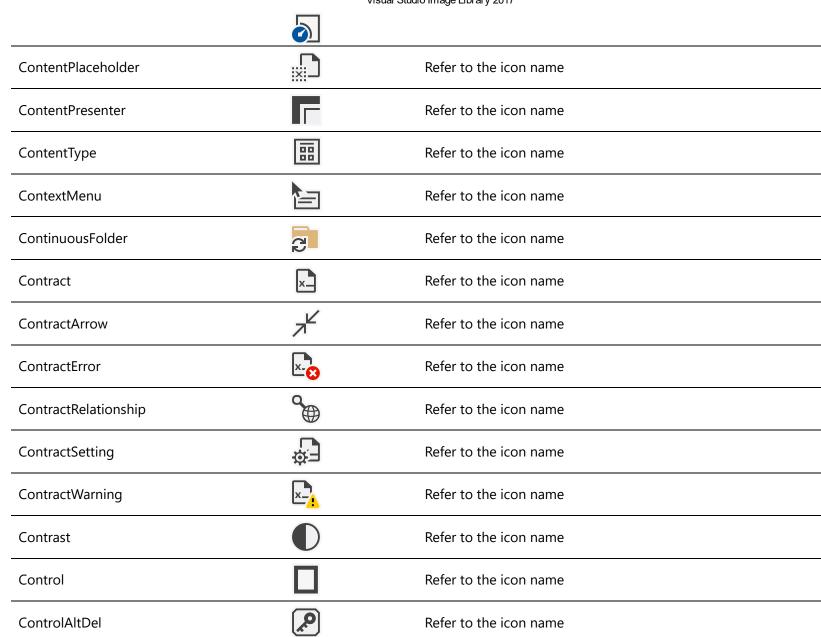

Refer to the icon name


Refer to the icon name

Refer to the icon name

ControlFlow

ControlTool

Convert

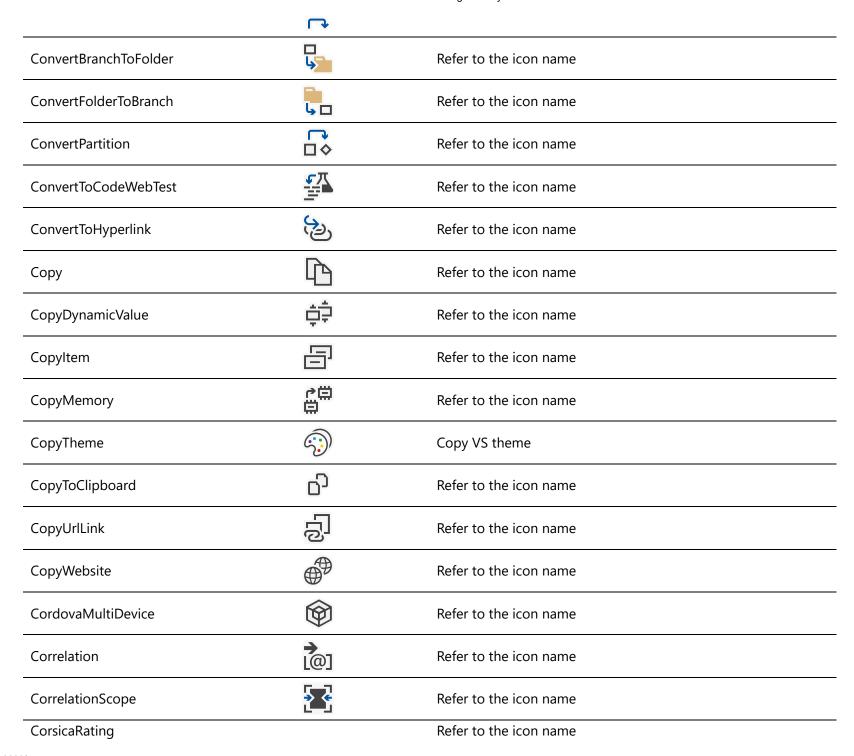

CountAttribute	#8	Refer to the icon name
CountCollection	123	Refer to the icon name
CountDictionary	M 123	Refer to the icon name
CountDynamicValue	123	Refer to the icon name
Counter	0 n	Refer to the icon name
СРР	++	Refer to the icon name
CPPAddATLSupportToMFC	ATL	Refer to the icon name
CPPApplication		Refer to the icon name
CPPATLApplication	ATL	Refer to the icon name
CPPATLASPComponent	ATL	Refer to the icon name
CPPATLControl	ATL	Refer to the icon name
CPPATLDialog	ATL	Refer to the icon name
CPPATLDynamicLibrary	ATL	Refer to the icon name
CPPATLEvent	ATL	Refer to the icon name
CPPATLFile	ATL	Refer to the icon name
CPPATLOLEDBConsumerWizard		Refer to the icon name
CPPATLProperty		Refer to the icon name


	ATL	
CPPATLServer	ATL	Refer to the icon name
CPPATLSimpleObject	ATL	Refer to the icon name
CPPATLWebService	E (A)	Refer to the icon name
CPPBlankApplication		Refer to the icon name
CPPClassLibrary		Refer to the icon name
CPPCommentCode	//	Refer to the icon name
CPPConsole	C:\	Refer to the icon name
CPPCustomWizardProject		Refer to the icon name
CPPDirectX2DApplication		Refer to the icon name
CPPDirectX3DApplication	\bigcirc	Refer to the icon name
CPPDynamicApplication	\leftrightarrow	Refer to the icon name
CPPFile		Refer to the icon name
CPPFixedLayoutApplication		Refer to the icon name
CPPGridApplication		Refer to the icon name
CPPHeaderFile	H	Refer to the icon name
CPPHubApplication		Refer to the icon name
CPPMakeFileProject		Refer to the icon name

CPPMarkupXML	⟨⊕⟩	Refer to the icon name
CPPMFCActiveX	MX	Refer to the icon name
CPPMFCApplication	M	Refer to the icon name
CPPMFCClass	M	Refer to the icon name
CPPMFCDLL	M F C	Refer to the icon name
CPPMFCLibrary	M F C	Refer to the icon name
CPPMFCODBCConsumerWizard	M	Refer to the icon name
CPPMinimalRebuildDependencyFile	Ē	Refer to the icon name
CPPNanoServerApplication		Refer to the icon name
CPPNavigationApp	1	Refer to the icon name
CPPPhone		Refer to the icon name
CPPPhoneBlank		Refer to the icon name
CPPPhoneDynamic	□	Refer to the icon name
CPPPhoneHub	□.	Refer to the icon name
CPPPhoneLibrary		Refer to the icon name
CPPPhonePivot	ab 	Refer to the icon name
CPPPhoneTest		Refer to the icon name

		3
	<u></u>	
CPPPhoneWeb		Refer to the icon name
CPPProjectFilterFile		Refer to the icon name
CPPSharedCodeProject		Refer to the icon name
CPPShell		Refer to the icon name
CPPSourceFile		Refer to the icon name
CPPSplitApplication		Refer to the icon name
CPPSQLProject		Refer to the icon name
CPPStoredProcedureProject	≡ ₌	Refer to the icon name
CPPStringQuote	(47)	Refer to the icon name
CPPTablet	-	Refer to the icon name
CPPTest		Refer to the icon name
CPPTestLibrary	是!	Refer to the icon name
CPPTestProject	八	Refer to the icon name
CPPUniversalPlatformLibrary		Refer to the icon name
CPPWebService	≡ ⊕	Refer to the icon name
CPPWin32Project	==	Refer to the icon name
CPPWindowsLibrary		Refer to the icon name

CPPWindowsService	3	Refer to the icon name
CPPXMLProject	⟨⊕⟩_	Refer to the icon name
CrashDumpFile		Refer to the icon name
Create	*	Refer to the icon name
CreateCustomExpression		Refer to the icon name
CreateEnumerator	* 3	Refer to the icon name
CreateEnvironmentFromTemplate		Refer to the icon name
CreateLibraryEnvironment	*	Refer to the icon name
CreateLinkedTable	* + €	Refer to the icon name
CreateListItem	*-	Refer to the icon name
CreateMessage	<u>₹</u> }1	Refer to the icon name
CreateNewGraph	#7 	Refer to the icon name
CreatePackage	*#	Refer to the icon name
CreatePhysicalEnvironment	*.	Refer to the icon name
CreateRelationshipMenu	*= =-	Refer to the icon name
CreateSchema	**	Refer to the icon name
CreateSharedStep		Refer to the icon name

CreateVirtualEnvironment	*1	Refer to the icon name
CrossGroupLink	}=	Refer to the icon name
CrystalReport	*)	Refer to the icon name
CS	C#	Refer to the icon name
CSApplication		Refer to the icon name
CSAssemblyInfoFile	i	Refer to the icon name
CSBDCModelTemplate	Ħ	Refer to the icon name
CSBlankApplication		Refer to the icon name
CSBlankFile	\mathbf{Z}	Refer to the icon name
CSBlankPhone		Refer to the icon name
CSBlankWeb	(P)	Refer to the icon name
CSClassCollection	13.7	Refer to the icon name
CSClassFile	4	Refer to the icon name
CSClassLibrary		Refer to the icon name
CSCodeTest	<u> </u>	Refer to the icon name
CSColumn		Refer to the icon name
CSComponentClass		Refer to the icon name

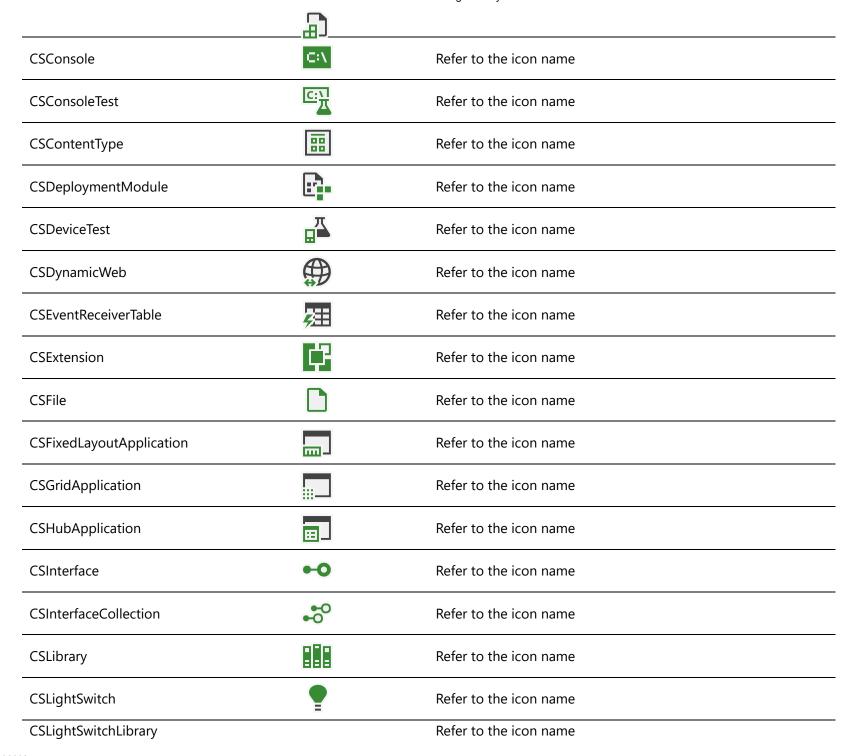




	≡ =	
CSListDefinition		Refer to the icon name
CSMenuItemCustomAction	F.E	Refer to the icon name
CSMobileWebProject		Refer to the icon name
CSNavigationApp		Refer to the icon name
CSPackage	Ĥ	Refer to the icon name
CSPhone		Refer to the icon name
CSPhoneApplication		Refer to the icon name
CSPhoneHub		Refer to the icon name
CSPhoneLibrary		Refer to the icon name
CSPhonePivot	ab 	Refer to the icon name
CSPhoneTest	Į.	Refer to the icon name
CSPhoneWeb		Refer to the icon name
CSRazorFile	@	Refer to the icon name
CSReport	<u>a</u>	Refer to the icon name
CSRibbonCustomAction	命	Refer to the icon name
CSSClass	•	Refer to the icon name
CSSearch		Refer to the icon name

	<u> </u>	
CSSElement	4	Refer to the icon name
CSServiceBusWorker	<u>=</u>	Refer to the icon name
CSSilverlight	8	Refer to the icon name
CSSilverlightLibrary		Refer to the icon name
CSSilverlightPhone		Refer to the icon name
CSSilverlightSharePoint2010WebPart	S	Refer to the icon name
CSSilverlightSharePoint2013WebPart	S	Refer to the icon name
CSSilverlightTest		Refer to the icon name
CSSilverlightWeb		Refer to the icon name
CSSiteDefinition	9	Refer to the icon name
CSSLink	E.A.	Refer to the icon name
CSSourceFile		Refer to the icon name
CSSplitApplication		Refer to the icon name
CSSQLLibrary		Refer to the icon name
CSSStyleError	A S	Refer to the icon name
CSTablet		Refer to the icon name
CSTest		Refer to the icon name



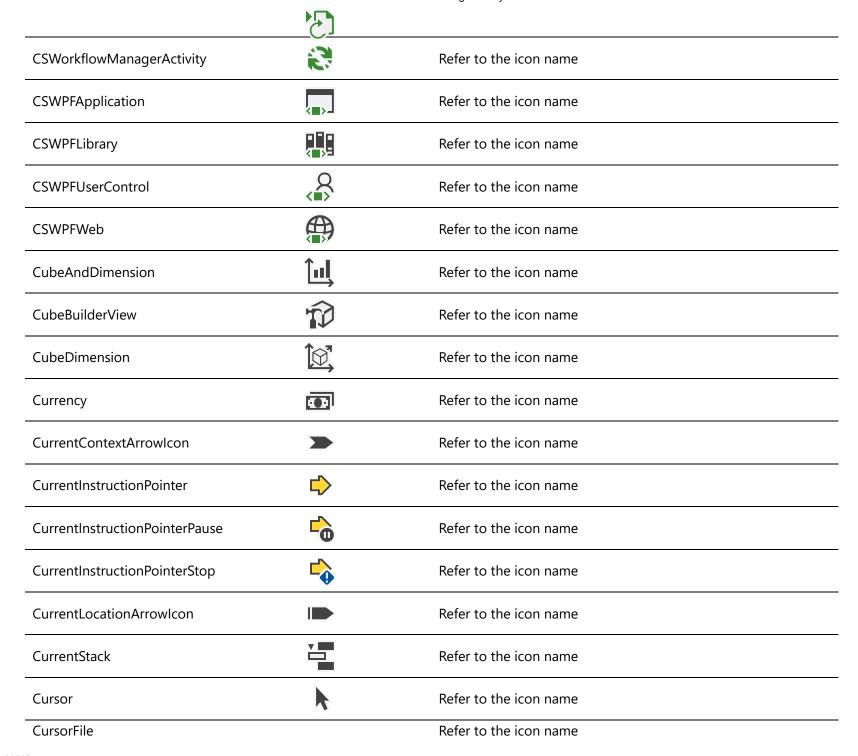

	<u>F</u>	
CurvedBrackets	()	Refer to the icon name
CurveTool	C	Refer to the icon name
CustomAction) i	Refer to the icon name
CustomActionEditor	- //	Refer to the icon name
CustomControl	<u> </u>	Refer to the icon name
CustomErrorMessage	⊠≡	Refer to the icon name
CustomExpression	\bigcirc	Refer to the icon name
CustomMark		Custom mark placed on timeline generated by diagnostics.
CustomStyleSheet		Refer to the icon name
CustomValidator	_	Refer to the icon name
Cut	X	Refer to the icon name
CyclicCarousel	台	Refer to the icon name
Cylinder	9	Refer to the icon name
D	D	Refer to the icon name
DACapplications	<u>-</u> 星	Schema with database modifier
DarkTheme		For indicating dark theme background. Looks like mostly dark moon
Databar		Data table withsome areas filled in.

		3	
Database		Blue barrel, the database icon	
Database Application		Application with database modifier, for database applications	
DatabaseAuditSpecification	Q	magnifier modifer represents audit	
Database Audit Specification Off	Q	magnifier modifer represents audit plus X modifier means its turned off	
DatabaseColumn		Refer to the icon name	
DatabaseDetailView	Q	Refer to the icon name	
DatabaseGroup		2 database icons symbolize database group	
DatabaseGroupError		indicates error with database group	
DatabaseMarkup	S	database with angle bracket modifer means database markup	
DatabaseMethod		database with cube modifier to indicate method	
DatabaseOffline	×	X modifer shows that database is offline	
DatabasePause		pause modifier shows that the database is paused	
DatabasePerformance		performance icon with database modifier represents how database is performing	
DatabaseProperty	۴	Intellisense icon wrench icon represents property with database modifier	
DatabaseReference		database with reference modifer	
DatabaseRole	Q ²	database with user modifier indicates the database role	
DatabaseRoleError		Database role with error modifier to	

	2	indicate error
DatabaseRoleWarning	27	Database role with warning modifier to indicate warning
DatabaseRun		Database with play modifer represents run database
DatabaseSchema	r.	databae with schema modifer
DatabaseSetting	\$	gear modifer represents database setting
DatabaseSource		arrow represents source
DatabaseStop		stop modifier on database to stop
DatabaseStoredProcedure		App window with text and database modifier represents database stored procedure
DatabaseTableGroup		double table modifier represents table group
DatabaseUnitTest	<u>Z</u>	the beaker modifer represents test
DatabaseUnknown	?	question mark modifier means database unknown
DatabaseWarning	1	warning modifier means something wrong with database
DataCompare		2 databases with arrows pointing at each other represents compare
DataField		data column with one field highlited represents data field
DataForm	Œ	Refer to the icon name
DataGenerationPlan		Plan document with lines is main icon with database modifier to specify what plan is for
DataGenerator		Dots with arrow aimed at database represents data generator

DataGrid		Grid icon with database modifier represents Data grid
DataGridArrowLeftWithAsterisk	*	Refer to the icon name
DataGridArrowRightWithAsterisk	*	Refer to the icon name
DataGridDropPointTarget		Refer to the icon name
Datalist		Refer to the icon name
DataMining	X	Pickaxe by itself represents data mining, not for mining anything else
DataMiningDimension		Refer to the icon name
DataMiningMethod	6	Refer to the icon name
DataMiningPrediction	6	Refer to the icon name
DataMiningQueryTask	々	Refer to the icon name
DataMiningStructure	K	Refer to the icon name
DataMiningStructureColumn	湿	Refer to the icon name
DataMiningViewer	X	No pickaxe or database, the viewbox and schema indicates datamining viewer
DataPager	4	2 pages with back and forth arrows represents paging through data
DataRepeater		repeater icon with database as modifier
DataServer		server icon with database modifer
DatasetReference		database set with shortcuticon modifer represents reference
DataSourceReference		plug represents datasource with shortcut

		modifer for reference
DataSourceTarget	E ³	Double database icons with opposite arrows reversed out
DataSourceView		Database icon with view modifier
DataTable		Table icon with large database modifier
DataViewHH		Refer to the icon name
DatePicker		Calendar date picker control.
DateTimeAxis	12	Calendar on an axis
DebugCheckedTest	V	The debug play icon with a checkbox modifier
DebugHistorySeekToFrame		Refer to the icon name
DebugSelection	卫	Beaker in a outline (outline meaning selected) with a debug/play modifier
DebugTemplate		A dotted document means template, with a hollow debug/play modifier
DebugXSLT	品	Schema icon with green debug/play modifier
DecisionNode	★ →	node represented by diamond, 2 arrows represents decision
DecisionTree	먊	large diagram
DeclarationArrow	÷	Refer to the icon name
DeclarativeCatalogPart		Refer to the icon name
DecreaseDecimalsHL	. 00	Decimal icon with an arrow for decrease
DecreaseFontSize		Font icon A with down arrow symbolizing

	* A	decrease
DecreaseHorizontalSpace	- - → ←	vertical lines with horizontal arrows pointing toward each other
DecreaseVerticalSpace	\ -	horizontal lines with vertical arrows pointing toward each other
DefaultConstraint	01-	Refer to the icon name
Default Constraint Warning	01/4	Default constraint icon with warning modifier
DefaultIcon		Text file icon with database modifier
DefineInheritance	* =	Refer to the icon name
DefualtConstraitError	01(2)	Refer to the icon name
DelayWorkflow	9	Workflow icon with clock modifier to indicate delay
Delegate		intellisense icon
DelegateFriend		intellisense icon heart represents friend
DelegatePrivate		intellisense icon lock represents private
DelegateProtected		intellisense icon star represents password protected(?)
DelegateSealed		circle/slash represents sealed
DelegateShortcut		arrow in box represents shortcut
DelegationArrow	7	Refer to the icon name
DeleteAttachment	×	Refer to the icon name
DeleteAzureResource		Cube represents azure resource

DeleteBreakpoint	×	Delete selected breakpoint.
DeleteCell	× 4	Cell icon with delete red x modifier
DeleteClass	פ	Class icon with delete red x modifier
DeleteClause	×_	Clause icon with delete red x modifier
DeleteColumn	¥	Selected column icon with delete red x modifier
DeleteCommandColumn	×	Column icon with delete red x modifier
DeleteDatabase	×	Database icon with delete red x modifier
DeleteDimensionTranslation	× /	Dimension translation icon with delete red x modifier
DeleteEvent	×	Event icon with delete red x modifier
DeleteFilter	× _Y	Filter icon with delete red x modifier
DeleteFolder	×	Folder icon with delete red x modifier
DeleteGroupBox	×XY	Group box icon with delete red x modifier
DeleteKPI	×	KPI icon with delete red x modifier
DeleteListItem	×=	List item icon with delete red x modifier
DeleteParameter	<u>×</u>	parameter icon with delete red x modifier
DeletePerspective	× N	Perspective icon with delete red x modifier
DeleteProperty		Property (wrench) icon with delete red x

	×s	modifier
DeleteQuery	×a	Query icon with delete red x modifier
DeleteRelationship	×P	Relationship icon with delete red x modifier
DeleteStep	×	step icon with delete red x modifier
DeleteTable	×	table icon with delete red x modifier
DeleteTableColumn	×T	column icon with delete red x modifier
DeleteTableRow	₽ ×	row icon with delete red x modifier
DeleteTag	×	Tag icon with delete red x modifier
DeleteTranslation	X P	Translation (globe and cube) icon with delete red x modifier
DeleteUser	×	User icon with delete red x modifier
DeleteVariables	X: JX	fx icon with delete red x modifier
DeleteWatch	×	watch (glasses) icon with delete red x modifier
DependencyGraphAncestor	品	Dependency graph with ancestor.
DependencyArrow	,,7	Dotted line arrow means dependency
DependencyArrowWarning	1	Dependency icon with warning modifier
DependencyGraph	8	Tree diagram
DependencyMatrix	=0	Refer to the icon name
Deploy		3-square deploy icon

		<u> </u>	
DeployDatabase		server icon pointing to database	
DeploymentConfiguration		Server icon with deployment icon modifier	
DeploymentConfigurationExtension	\$	Deployment icon with squiggly line	
DeploymentProject		App icon with deploy modifier	
DeploymentSlots	(III)	Azure feature Deployment Slots	
DepthTest	Ż	Z with arrow pointing down at 45 degrees	
DerivedColumn	= }=	2 columns with arrow between	
DerivedDataMining	70	Data mining icon with stopwatch modifier	
DescriptionViewer	Ç ⁶	comment bubble with info modifier	
DesignMode		Triangle and measuring tool	
DesignStorage		Graph icon with cube modifier	
DesignView		Square/circle icon	
DestinationAssistant	\rightarrow	Box with arrow modifier pointing to it	
DetailDataView	≡≡	Straight lines to represent data (not to be confused with database)	
DetailPageItemTemplate	≣≣	Layout icon with 3 boxes for detail	
DetailView	©	Lens magnifying part of a box	
DevicePreview		Mobile phone with cursor	

DeviceTest		Test beaker icon with mobile device modifier	
DGSLFileType	A	3D sphere with diagram modifier	
Diagnose	Ų	Stethoscope	
DiagnosticesFile		Document icon with checkboxes and lines	
Diagram	品	Refer to the icon name	
DiagramError	H _S	Diagram icon with error modifier	
DiagramWarning	돠.	Diagram icon with warning modifier	
Dialog	==	App window with lines	
DialogGroup	a	Dialog icon group	
DialogTemplate		A dotted dialog icon means dialog template	
Dictionary	Ф	Open book	
DictionaryContain	ΪΔα	Dictionary icon with equal sign modifier	
Dimension		3 arrows symbolizing 3 dimensions	
DimensionBrowserView		Dimension icon with magnifying glass modifier	
DimensionBuilderView		Dimension icon with hammer modifier	
DimensionTranslationView	↑	Dimension icon with globe modifier	
DimensionUsageView		Dimension icon with double 3d box	

		modifier
DimensionWriteback		Dimension icon inside an app window icon with an upload arrow modifier
DirectionLight		Refer to the icon name
DirectLinksQuery	T	Query list icon
DirectX2DApplication		App window with 2D box modifier
DirectX3D		3D box
DirectX3DApplication		App window with 3D box modifier
DisableAllBreakpoints	6	Disable all breakpoints.
DisableDebugging	×	Disable debugging
DisableDiagnostics		Disable diagnostics
DisassemblyWindow	L	Refer to the icon name
Disconnect	×ţ	Pleg with red delete x modifer
DisplayConfiguration	ع	Display icon with wrench modifier
DisplayFullSignature	Г] ab	Straight brackets with ab modifier
DisplayName	ab	ab icon inside a box
DisplayNoneMark	X	x inside a box
DistributeBottom	=	Refer to the icon name
DistributeHorizontalCenter		Refer to the icon name

DistributeLeft		Refer to the icon name
DistributeRight	1[1]	Refer to the icon name
DistributeTop	=	Refer to the icon name
DistributeVerticalCenter	į į	Refer to the icon name
Divide	1	Refer to the icon name
DivideMember	6	member icon with a divide (slash) modifier
DivideMemberFormula	f _x	member icon with a divide (slash) modifier and an fx modifier
DividePath	0	drawing tool
DIVTag		Refer to the icon name
DMAChannel		Refer to the icon name
Dock		Refer to the icon name
DockPanel		Refer to the icon name
DockTo		App window with arrow pointing to corner
Document		Document icon means document or file
DocumentLibraryFolder	<u> </u>	Folder icon with document modifier
DocumentOutline	Œ	Bullet points and lines
DocumentTemplate		Dotted version of document means

		template
DocumentViewer	©	Document with lens magnifying in the corner
DomainController	Į.	Server icon with controller icon modifier
DomainType	123	Refer to the icon name
DomainUpDownScroll	AH	Refer to the icon name
DottedSplitter	••••	Refer to the icon name
DoughnutChart		Refer to the icon name
DoWhile		Refer to the icon name
Download	\	Blue down arrow modifier means download
DownloadFile	*	Blue down arrow modifier means download
DownloadFolder	*	Blue down arrow modifier means download
DownloadLog		Blue down arrow modifier means download
DownloadWebSetting		Blue down arrow modifier means download
DragDropItemControl		Drag and drop tool icon
DragDropItemGroupControl	T	Refer to the icon name
DragHandle	0	Refer to the icon name
DragPanel	4	Refer to the icon name
DrillDown		Refer to the icon name

	√ ⇔	
Driver	~ 3	Driver icon
DriverPackage	6 7	Driver icon with package modifier
DriverTest	27	Driver icon with test beaker modifer
DriverVerifier	%	Driver icon with checkmark modifier
DropdownControl		Refer to the icon name
DropdownMenu		Refer to the icon name
DropShadow		Refer to the icon name
DSlash	abla	Refer to the icon name
DTSCustomTask	A	Globe icon with hammer modifier
DTSFileSystem		Folder with deployment icon modifier
DTSVisualizer	<u> </u>	Deployment icon with viewbox modifier
Dynamic	\leftrightarrow	2-way arrow means dynamic
DynamicDataField	•	Highlighted field in a column with dynamic modifier
DynamicDiscoveryDocument		App window icon with globe icon
DynamicEntity		Class/entity icon with dynamic modifier
DynamicGroup	##	Double dynamic modifier
DynamicHyperlink		Refer to the icon name

		•
	<u>A</u>	
DynamicImage		Image icon with dynamic modifier
DynamicLibrary		Library icon with dynamic modifier
DynamicMenu	\$	Menu icon with dynamic modifier
DynamicPhone		Mobile phone icon with dynamic modifier
DynamicPopulate		Document icon with dynamic modifier
DynamicProcedure	E	Procedure icon (app window with lines) with dynamic modifier
DynamicsCRM		Image icon with dynamic modifier
DynamicTable		Image icon with dynamic modifier
DynamicTemplate	\leftrightarrow	Template icon with dynamic modifier
DynamicTemplateAttach	⊕	Template icon with dynamic modifier and paperclip
DynamicValidator	\Leftrightarrow	Dynamic icon with checkmark modifier
DynamicValue	₽	Refer to the icon name
DynamicWeb		Globe with dynamic modifier
E2ETracing		Refer to the icon name
EdiAs2Receive	ËÀ	Refer to the icon name
EdiAs2Send	ÊŘ	Refer to the icon name
EdiReceive		Refer to the icon name

	•	iodal otdalo ililago Ibrai y 2011
	<u>*</u>	
EdiSend		Refer to the icon name
Edit		Pencil by itself or as a modifier can mean edit, custom, or modify
EditAssociation		Pencil by itself or as a modifier can mean edit, custom, or modify
EditBug		Pencil by itself or as a modifier can mean edit, custom, or modify
EditCommandColumn	\	Pencil by itself or as a modifier can mean edit, custom, or modify
EditDataGridRowLeft		Pencil by itself or as a modifier can mean edit, custom, or modify
Edit Data Grid Row Right	\$	Pencil by itself or as a modifier can mean edit, custom, or modify
Edit Data Sample		Pencil by itself or as a modifier can mean edit, custom, or modify
EditDimension		Pencil by itself or as a modifier can mean edit, custom, or modify
EditDropDownList		Pencil by itself or as a modifier can mean edit, custom, or modify
EditEllipse		ellipse with handles means edit ellipse (drawing tool)
EditFieldDialog		Pencil by itself or as a modifier can mean edit, custom, or modify
EditFilter	ΪŢ	Pencil by itself or as a modifier can mean edit, custom, or modify
EditFreeHand	<u>.</u>	Pen tool with handles means edit the freehand shape
EditKey	-	Pencil by itself or as a modifier can mean edit, custom, or modify
EditLabel	įΑ	Pencil by itself or as a modifier can mean edit, custom, or modify
EditLayoutTable		Pencil by itself or as a modifier can mean

	25	edit, custom, or modify
EditLine		Line tool with handles means edit line
EditLink	C	Pencil by itself or as a modifier can mean edit, custom, or modify
EditManifest		Pencil by itself or as a modifier can mean edit, custom, or modify
EditMultipleObjects		Object icons with handles means edit multiple objects
Editor	₽	Rectangular box with text lines broken up means editor (no pencil)
EditorWarning	Ē <mark>₄</mark>	Editor icon with warning modifier
EditorZone	Ľ	Edit pencil points to editor zone
EditPage	\(\frac{1}{2}\)	page with pencil/edit modifier
EditPolygon		polygon drawing tool with handles means edit polygon
EditQuery		query icon with pencil/edit modifier
EditRectangle		rectangle tool with handles mens edit rectangle
EditRelationship	3	relationship icon with pencil/edit modifier
EditSelectedTag	(3)	outlined tag icon with pencil/edit modifier
EditTag	U .	pricetag style tag icon with pencil/edit modifier
EditText	;T;	T tool with handles means edit text
EditTheme	•	Edit VS theme
EditTitleString		the ab icon means title string, pencil/edit

	ab_	modifier means edit title string
EditTooltip		Tooltip icon with pencil/edit modifier
EditWindow		Window icon (aka app icon) with pencil/edit modifier means edit window
Effects	fx	fx icon means effects and can appear by itself or as a modifier
EffectsDisabled		fx icon with no modifier
EffectsEnabled	F	fx icon by itself
ElementHost	<u> </u>	Refer to the icon name
ElementID	0	Refer to the icon name
Ellipse		ellipse tool
Ellipsis	•••	3 dots means more
EmailAdapter	M	Mail icon with adapter modifier
EmailAddressEditor		Mail icon with @ symbol and pencil/edit modifier
EmailAddressViewer	@	Gold mail icon with @ symbol only
EmbeddedFont	βA	Font icon A with lock modifier symbolizing embedded font
EmptyBucket	X	Refer to the icon name
EmptyContainer	4 b	In this case, dotted line means empty
Enable All Breakpoints	•	Enable all breakpoints.
EnableCode		Code icon with green checkmark


	\	modifier meaning enable
EnableDebugging	V	Enable debugging the play icon means debugging green checkmark represents enable
EnableDiagnostics		Enable diagnostics
EncapsulateField		intellisense icon
End	▶I	Refer to the icon name
EndPoint	E.	Refer to the icon name
EndpointComponent	田	Refer to the icon name
Entities	E	Refer to the icon name
EntityContainer	43	App window with class icon inside
EntityDatabase	45	Database icon with class modifier
EntitySet		Double class icon
Entry	→	Refer to the icon name
Enumerator		intellisense icon
EnumFriend	•••	intellisense icon
Enumltem	F	intellisense icon
EnumItemFriend	₽•	intellisense icon
EnumItemPrivate	P	intellisense icon
		

EnumItemProtect		intellisense icon
EnumItemSealed		intellisense icon
EnumItemShortcut		intellisense icon
EnumItemSnippet	.	intellisense icon
EnumPrivate		intellisense icon
EnumProtect	- *	intellisense icon
EnumSealed		intellisense icon
EnumShortcut		intellisense icon
EnumSnippet		intellisense icon
Environment	Į.	Refer to the icon name
EnvironmentDefinition		Refer to the icon name
Eraser	\Diamond	eraser tool in Blend(?)
ErrorBarChart	Φ	Refer to the icon name
ErrorOutputColumn	↑	Refer to the icon name
ErrorRule	8 ⁸	Refer to the icon name
ErrorSummary		Refer to the icon name
Event	<i>5</i>	intellisense icon
EventAdded		intellisense icon

	<i>F</i> ₊	
EventBreakpoint	9	intellisense icon
EventBreakpointDisabled	(intellisense icon
EventBreakpointUnbound	%	intellisense icon
EventConditionalBreakpoint	A	intellisense icon
EventDeleted	F _×	intellisense icon
EventFilter	4	intellisense icon
EventFriend	<i>5</i> ,	intellisense icon
EventLog	5	intellisense icon
EventLogFailureAudit	8	intellisense icon
EventLogSuccessAudit	8	intellisense icon
EventModify	7,1	intellisense icon
EventMoved	₹ →	intellisense icon
EventNotificationError	78	intellisense icon
EventPrivate	%	intellisense icon
EventProtect	*	intellisense icon
EventReceiverTable	7	intellisense icon
EventRenamed		intellisense icon

	F_{χ}	
EventSealed	5 0	intellisense icon
EventSession	/III	intellisense icon
EventShortcut	5	intellisense icon
EventSnippet	-	intellisense icon
EventTracepoint	♦	Refer to the icon name
EventTracepointDisabled	\(\xi\)	Refer to the icon name
EventTracepointUnbound	(F)	Event Tracepoint will not be invoked.
EventTrigger	%	Refer to the icon name
EventWarning	5 1	Refer to the icon name
ExcelWorksheetView		Refer to the icon name
Exception	!	intellisense icon
ExceptionFriend		intellisense icon
ExceptionPrivate		intellisense icon
ExceptionProtect	□_*	intellisense icon
ExceptionSealed		intellisense icon
ExceptionSettings	\$	intellisense icon
ExceptionShortcut		intellisense icon

	!	
Exclamation		Refer to the icon name
ExcludeMember	9	member icon with exclude icon modifier
ExcludeMemberFormula	€ _f	member icon with exclude icon modifier and formula f
ExcludePath	0	drawing tool
ExecutableType		Refer to the icon name
Execute		Refer to the icon name
ExecuteDDL	*	Refer to the icon name
ExistConnlcon	و ا	Refer to the icon name
ExistingConnection		Refer to the icon name
ExistsInCollection	* 5	Collection icon with checkmark modifier
Exit	\odot	Circle with arrow exiting it
ExitFullScreen		Refer to the icon name
ExitRemoteDebugger	·	Refer to the icon name
Expand	•	Refer to the icon name
ExpandableContentControl	□ ⊘	Refer to the icon name
ExpandAll	a a	Refer to the icon name
ExpandArrow		Angled double arrow

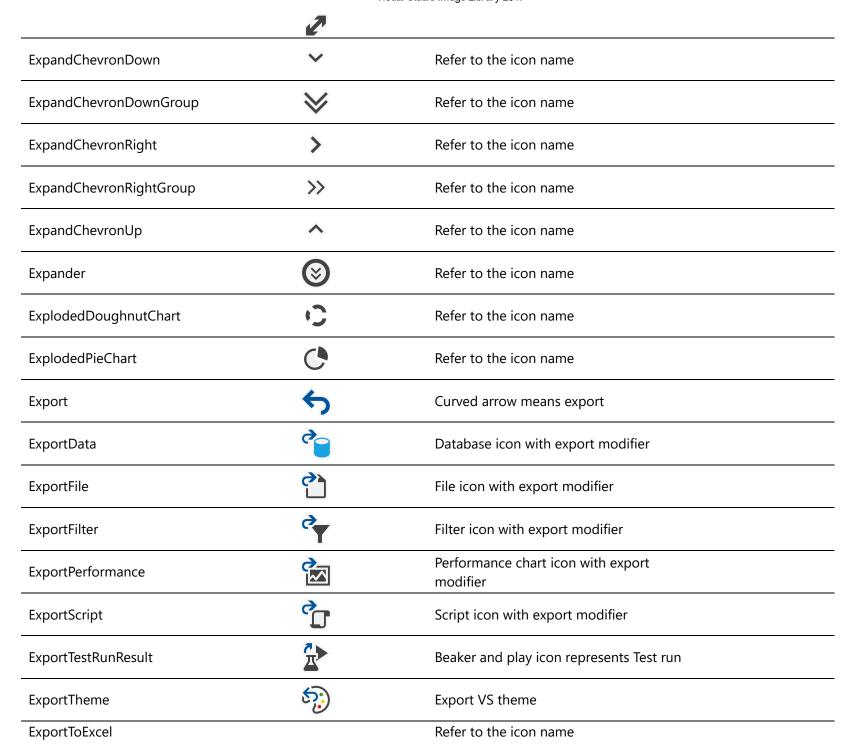

	ex.	· ,
Extend	<i>₹</i>	Refer to the icon name
ExtendedPropertyError	1 60	Refer to the icon name
ExtendedPropertyWarning	%	Refer to the icon name
ExtendProperty	1/2	Refer to the icon name
ExtendToFullScreen		Refer to the icon name
Extension	¢	Extension for VSIDE or VS Code.
Extension Manager Manifest		Extension icon and manifest icon combined
Extension Manager Project	却	App window icon with Extension modifier
ExtensionMethod	0	Refer to the icon name
Extension Package		Package icon with extension modifier
External Dictionary	B _D	Refer to the icon name
External Variable Value	9	Refer to the icon name
ExtractConstant	=	Refer to the icon name
ExtractInterface	\$	Refer to the icon name
ExtractMethod		Refer to the icon name
F1Help	?	Refer to the icon name
FactTable		Refer to the icon name

	VIO	dal clade image Library 2017
	[nt]	
FastLineChart	S	Refer to the icon name
FastPointChart	<u> </u>	Refer to the icon name
Favorite	*	Refer to the icon name
FeedbackBubble	學	Refer to the icon name
FeedbackSad		Refer to the icon name
FeedbackSmile		Refer to the icon name
Field		Intellisense icon
FieldAdded	4	Intellisense icon
FieldDeleted	×	Intellisense icon
FieldFriend		Intellisense icon
FieldModify		Intellisense icon
FieldModifyTrivial	₽ p	Intellisense icon
FieldPrivate		Intellisense icon
FieldProperties	φ	Intellisense icon
FieldProtect	*	Intellisense icon
FieldRenamed	₽ χ	Intellisense icon
FieldSealed		Intellisense icon

		,
FieldShortcut		Intellisense icon
FigureCaptionTag		Refer to the icon name
FileCollection	Ō	multiple document files represents file collection
FileDestination	\$	Refer to the icon name
FileDialogReport	5	Folder icon with report modifer
FiledSnippet	<u>.</u>	Refer to the icon name
FileEncodingDialog		Refer to the icon name
FileError	C	Refer to the icon name
FileExclude		Refer to the icon name
FileGroup		Refer to the icon name
FileGroupError	<u> </u>	Refer to the icon name
FileGroupWarning		Refer to the icon name
FileHead		Refer to the icon name
FileOK		Refer to the icon name
FilePrintDirect		Refer to the icon name
FileSecurityWarning	C _t	Refer to the icon name
FileSource		Refer to the icon name


File System Driver Package Template		Refer to the icon name
FileSystemDriverTemplate	8	Refer to the icon name
FileSystemEditor	a	Refer to the icon name
FileSystemWatcher	6	Refer to the icon name
FileType		Refer to the icon name
FileWarning		Refer to the icon name
FilledEllipseTool		drawing tool
FilledRectangleTool		drawing tool
FilledRoundedRectangleTool		drawing tool
FillOpacity	***	drawing tool
FillTool	9	drawing tool
FillTransform	*	drawing tool
Filmstrip		Refer to the icon name
Filter	Y	Filter icon
FilterAlphabetically	*A	Filter icon as modifier
FilterDebugging	*	Filter icon as modifier
FilterDescriptor		Filter icon as modifier

	T _B	
FilterFile	<u></u>	Filter icon as modifier
FilterFolder	7	Filter icon as modifier
FilterFolderOpen		Filter icon as modifier
FilterMember	5	Filter icon as modifier
FilterPending	Ť _D	Filter icon as modifier
FilterTextbox	abl	Filter icon as modifier
FilterUser	7 A	Filter icon as modifier
FinalState	<u>-</u>	Refer to the icon name
Finance	•	Refer to the icon name
FindDown	P	Find magnifier
FindinFiles		Folder icon with find magnifier modifier
FindNext	→	Find icon with next arrow modifier
FindPrevious	* p	Find icon with previous arrow modifier
FindResults		Document icon with find icon modifier
FindSymbol	٥	Refer to the icon name
Firewall	↑ ±	Refer to the icon name
FirstIndent		Refer to the icon name

	<u>→</u>	
FitSelection	N 31	Refer to the icon name
FitToScreen	\	Refer to the icon name
FixedLayoutApplication		Measuring tool modifier means fixed layout
Flag	~	Refer to the icon name
FlagGroup	T'	Multiple flags
FlagThreadError	V _S	Flag icon with error modifier
FlatCap	B	Refer to the icon name
FlatList		Refer to the icon name
FlatPivotHH	iii	Refer to the icon name
FlatView	Qı	Refer to the icon name
Flip	M	drawing tool
FlipHorizontal	À	drawing tool
FlipVertical	Xr.	drawing tool
FlipZDimension	5	drawing tool
FloppyDrive		Refer to the icon name
Flow	♦>>	Refer to the icon name
FlowAggregation		Refer to the icon name

	\Leftrightarrow	
FlowDecision	\Diamond	Refer to the icon name
FlowLayoutPanel		Refer to the icon name
FluidLayout	*	Refer to the icon name
FluidLayoutActive	%	Refer to the icon name
Folder		Refer to the icon name
FolderBottomPanel		Refer to the icon name
Folder Browser Dialog Control		App icon with folder modifier
FolderError	8	Folder with error modifier
FolderInformation	•	Folder with info modifier
FolderOffline	×	Folder with X modifier
FolderOpen		Refer to the icon name
FolderOpenWarning		Open folder with warning modifier
FolderSuppressed	•	Folder with suppressed modifier
FolderTopPanel		Refer to the icon name
FolderWarning		Folder with warning modifier
Font	<u> </u>	Refer to the icon name
FontColor		Refer to the icon name

		•
	A	
FontDialog	Æ≣	Refer to the icon name
Fonticon	A	Refer to the icon name
FontSize	[‡] A	Refer to the icon name
Force	F	Refer to the icon name
ForceDirectLayout	රි	Refer to the icon name
ForEach	1	Refer to the icon name
ForEachLoop		Refer to the icon name
ForegroundColor		drawing tool
ForeignKey	<u></u>	Key
ForeignKeyConstraintError	:	Table icon with error modifier
ForeignKeyConstraintWarning	!	Table icon with warning modifier
ForeignKeyError	<u>⊗</u>	Key with error modifier
Foreign Key Relationship	P	Key with table
ForeignKeyWarning	<u></u>	Key with warning modifier
ForkArrow	次	Intertwined arrows
ForkNodeTool	**	Refer to the icon name
FormatDocument		Document with dotted guidelines

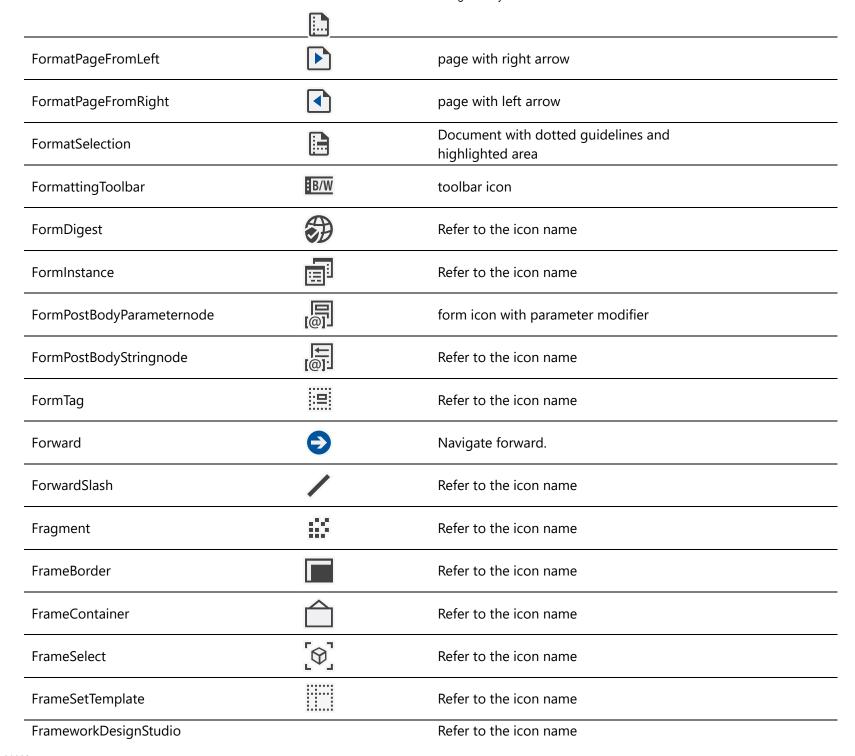

		3
FreezeRow		Refer to the icon name
Friend	•	Refer to the icon name
FromAccess	A ##	Refer to the icon name
FrozenInitiallyBreak	-	Refer to the icon name
FrozenInstructionPointer		Refer to the icon name
FS	F#	F# file
FSApplication		F# file
FSBlankApplication		F# file
FSBlankWeb		F# file
FSClassCollection	43	F# file
FSClassLibrary		F# file
FSCodeFile	01	F# file
FSConsole	C:\	F# file
FSConsoleTest	Z:D	F# file
FSFile		F# file
FSInteractiveWindow	æ	F# file
FSInterfaceCollection		F# file


	•••	
FSScript		F# file
FSSignatureFile	x_	F# file
FSSilverlightLibrary		F# file
FSTestProject	人	F# file
FSTutorialProject	9 _	F# file
FSWCFProject	©	F# file
FSWebApplication	(F# file
FSWindowsFormLibrary		F# file
FSWindowsService	Ξ	F# file
FSWorkerTemplateFile	₽	F# file
FSWPFApplication	₹	F# file
FSWPFLibrary		F# file
FSWPFUserControl	Q	F# file
FTPConnection	₩	Refer to the icon name
FTPSites		Refer to the icon name
FuctionMissing	f_{X}	Refer to the icon name
FullScreenshot		Refer to the icon name

FullTextStopList		Refer to the icon name
FunctionWarning	fx	Refer to the icon name
FunnelChart	$\overline{\forall}$	Refer to the icon name
FuzzyGrouping	1)	Refer to the icon name
FuzzyLookup		Refer to the icon name
FXGFile	FXG	Refer to the icon name
Gallery		Refer to the icon name
GanttChart		Refer to the icon name
Gateway	**	A type of Azure app/resource
Gauge	<i>(</i>)	Refer to the icon name
GaugeLinear	=	Refer to the icon name
GaugeWizard		Refer to the icon name
GeminiEntryPoint		Refer to the icon name
GenerateAllFromTemplate	5	Right arrow modifier means generate
GenerateChangeScript		Right arrow modifier means generate
GenerateCodefromExistingRecording	∏ →	Right arrow modifier means generate
GenerateDependancies		Right arrow modifier means generate

		3
	*コ 	
GenerateFile	→ T	Right arrow modifier means generate
GenerateMethod	*	Right arrow modifier means generate
GenerateRecordCode	<u>O</u>	Right arrow modifier means generate
GenerateResource	之	Right arrow modifier means generate
GenerateTable	>	Right arrow modifier means generate
GenerateThumbnail		Right arrow modifier means generate
GenericChart		Refer to the icon name
GenericOnlineTemplate		Refer to the icon name
GenericTaskIcon	→ □→	Refer to the icon name
GenericToolWindow		Refer to the icon name
GeoLocation	?	Refer to the icon name
GetAccessHH	د A	Refer to the icon name
GetAllWebsite		Refer to the icon name
GetDataFeedHH	2	Refer to the icon name
GetDictionary	*	Refer to the icon name
GetDynamicValueProperties	L	Refer to the icon name
GetDynamicValuePropertiesActivity		Refer to the icon name


		· · · · · · · · · · · · · · · · · · ·
	<u> </u>	
GetExcel	د د	Refer to the icon name
GetFileHH		Refer to the icon name
GetFromCollection	45	Refer to the icon name
GetHistoryListId	₹LO LO	Refer to the icon name
GetLatestVersion	*	Refer to the icon name
GetReportFormat		Refer to the icon name
GetSpecificVersion	0	Refer to the icon name
GetSQLFormat		Refer to the icon name
GetTaskListId		Refer to the icon name
GetTextFormat		Refer to the icon name
GlobalCalendar		Refer to the icon name
GlobalOffset	1	Refer to the icon name
GlobalVariable	fx	Refer to the icon name
GlobPatternFileSearch	**	Glob pattern is similar to regex
GlyphDown	•	Refer to the icon name
GlyphLeft	•	Refer to the icon name
GlyphRight		Refer to the icon name

	>	
GlyphUp		Refer to the icon name
LinkToExternalAvailability		Refer to the icon name
Link To External Dashboard		Refer to the icon name
LinkToExternalPerformanceTrend	2	Refer to the icon name
LinkToExternalUsage	Z	Refer to the icon name
GoToBottom	$\overline{\mathbf{\Lambda}}$	Refer to the icon name
GoToCurrentLineLocation	<u>~</u>	Refer to the icon name
GoToDeclaration	→	Refer to the icon name
GoToDefinition	→	Refer to the icon name
GoToEvent	***	Refer to the icon name
GoToField	**	Refer to the icon name
GoToFirstRow	I←	Refer to the icon name
GoToLastRow	→ I	Refer to the icon name
GoToMethod	*	Refer to the icon name
GoToNextComment	*	Refer to the icon name
GoToNextInList	-	Refer to the icon name
GoToNextModifiedWorkItem		Refer to the icon name

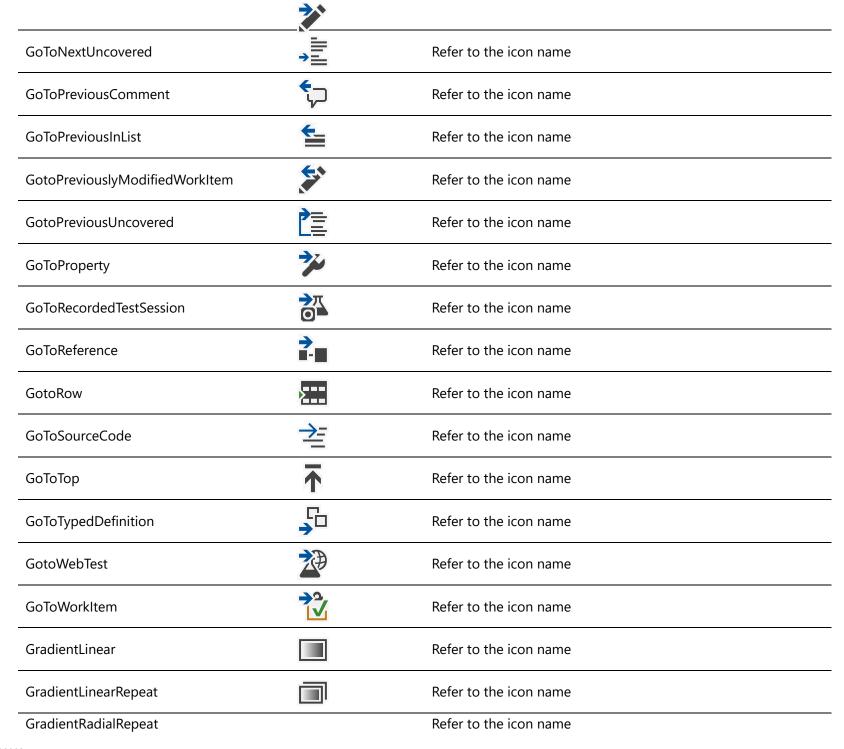

GradientTransform		Refer to the icon name
GraphBottomToTop	¥	Refer to the icon name
Graphics3D		Refer to the icon name
GraphLeftToRight	œ	Refer to the icon name
GraphRightToLeft	₿	Refer to the icon name
GraphTopToBottom	Æ	Refer to the icon name
GreenChannel	G	Refer to the icon name
Grid	H	Refer to the icon name
GridApplication		Refer to the icon name
GridDark	***	Refer to the icon name
GridDetailView		Refer to the icon name
GridGuide	Щ	Refer to the icon name
GridLayoutDiv	-8	Refer to the icon name
GridLight		Refer to the icon name
GridSplitter	•	Refer to the icon name
GridSplitterElement	12	Refer to the icon name
GridViewMoCo		Refer to the icon name

http://localhost:3000/ 100/455

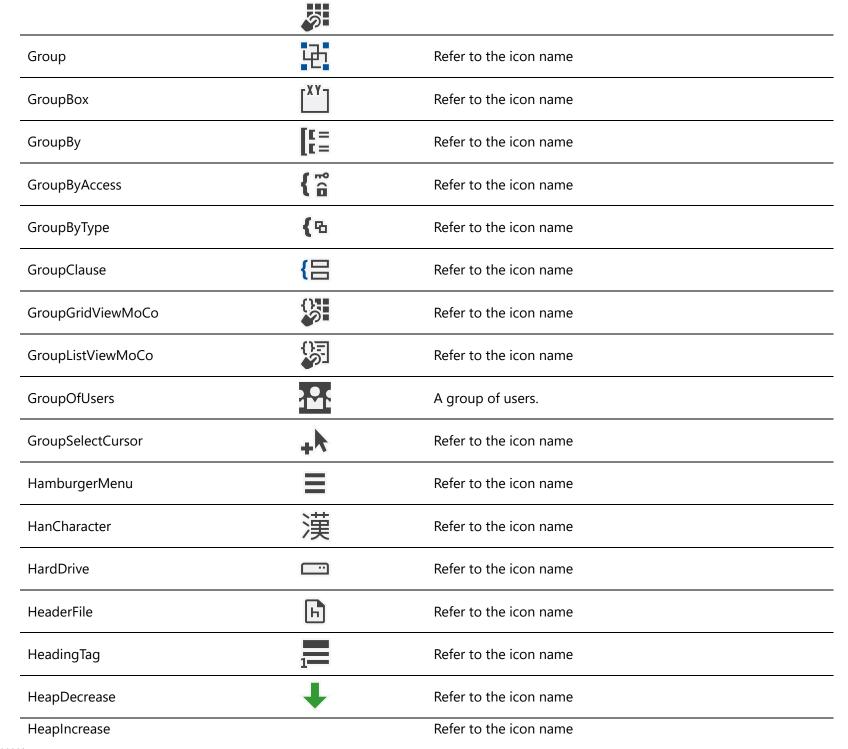

	<u> </u>	
HelpApplication	9 _	Refer to the icon name
HelpLibraryManager	8	Refer to the icon name
HiddenFolder		Refer to the icon name
HiddenFolderOpen	::::: <u>}</u>	Refer to the icon name
HiddenRule	P	Refer to the icon name
HiddenTextField	abl	Refer to the icon name
HiddenTypeFolder	-	Refer to the icon name
HideAllExceptSelectedThreads	₹Z. → Y.J.	Refer to the icon name
HideMember		Refer to the icon name
HideRedundantMerges	1	Refer to the icon name
HideSelectedThreads	+72. 72.	Refer to the icon name
HideTimeline	*	Refer to the icon name
Hierarchy	A	Refer to the icon name
HierarchyTracking	<u>. T.</u>	Refer to the icon name
HierarchyVariable	@	Refer to the icon name
HighlighterPen		Refer to the icon name
HighResolution		Refer to the icon name

http://localhost:3000/ 102/455

		•
HiglightText	ab	Refer to the icon name
HistogramVisualizer		Refer to the icon name
HistoricalCallReturn	\$	Refer to the icon name
HistoricalInstructionPointer	\$	Refer to the icon name
History	S	Refer to the icon name
HistoryTable	Ö	Temporal history table type. A temporal database is a database with built-in support for handling data involving time.
Home	仚	Refer to the icon name
HorizontalScrollBarControl		Refer to the icon name
HorizontalScrollViewer		Refer to the icon name
HotSpot	5	Refer to the icon name
HoverMenu	₹ 目	Refer to the icon name
HPCPerformanceSessionWizard	. 16	Refer to the icon name
HTMLDesignView		Refer to the icon name
HTMLError	< <u>\$</u>	Refer to the icon name
HTMLFile		Refer to the icon name
HTMLtag		Refer to the icon name
	·	

http://localhost:3000/ 103/455

HTMLTagBDI	\ <u>آ</u>	Refer to the icon name
HTMLTagBDO	cba	Refer to the icon name
HTMLTagBR		Refer to the icon name
HTMLTagComment	 	Refer to the icon name
HTMLTagEnd	>	Refer to the icon name
HTTPConnection	@	Refer to the icon name
HttpSend		Refer to the icon name
HubPage	=	Refer to the icon name
HyperLink	<u>A</u>	Refer to the icon name
HyperlinkBack		Refer to the icon name
HyperlinkFollow		Refer to the icon name
HyperlinkForward	S	Refer to the icon name
IconFile	*:	Refer to the icon name
IconView	***	Refer to the icon name
IDRLibraryFile	訂	Refer to the icon name
If	₽ <u>+</u> ₽	Refer to the icon name
IFrame	I	Refer to the icon name
IgnoreTrimWhiteSpace		Refer to the icon name

	=	
Image		Refer to the icon name
ImageBrowser	&	Image Browser is a tool shipping with VS IDE to help users browse the ImageLibrary by KnownMonikers.
ImageButton		Refer to the icon name
ImageChiseI	2	Refer to the icon name
ImageCrop	÷	Refer to the icon name
ImageGenerator		Refer to the icon name
ImageGroup		Refer to the icon name
Imagelcon	@	Refer to the icon name
ImageLoader		Refer to the icon name
ImageMap		Refer to the icon name
ImageMapFile		Refer to the icon name
ImageScale	M	Image Scale feature in XAML Experiences/Authoring Tools. A scaled image has several sizes.
ImageScrollViewer	*	Refer to the icon name
ImageSlideshow	√≥	Refer to the icon name
ImageStack	圆	A stack of images.
ImageTest	/*- -*/	Refer to the icon name

http://localhost:3000/ 105/455

ImmediateWindow	>	Refer to the icon name
ImplementInterface	→ •-0	Refer to the icon name
Import	4	Refer to the icon name
Important	R	Refer to the icon name
ImportCatalogPart	90	Refer to the icon name
ImportFile	\$	Refer to the icon name
ImportFilter	9	Refer to the icon name
ImportPackage	S _A	Refer to the icon name
ImportTheme	\$	Import VS theme
InactiveErrorSquiggle	abc	Refer to the icon name
Include	,71 '<+>	Refer to the icon name
IncreaseDecimalsHL	" 00 ← " 0	Refer to the icon name
IncreaseFontSize	^ A	Refer to the icon name
IncreaseHorizontalSpacing	- - ← →	Refer to the icon name
IncreaseImageBrightness	1	Refer to the icon name
IncreaseImageContrast	10	Refer to the icon name
IncreaseVerticalSpacing	↑ -	Refer to the icon name
Indexer		Refer to the icon name

http://localhost:3000/ 106/455

	[_]	
Infinity	∞	Refer to the icon name
InformationSymbol	i	Refer to the icon name
InfoRule	⊕ ⁸	Refer to the icon name
InfraredDevice		Refer to the icon name
Inheritance	Z	Refer to the icon name
InheritedControl	Ö	Refer to the icon name
InheritedForm		Refer to the icon name
InheritedUserControl	۵J	Refer to the icon name
InitializeCorrelation	* ←	Refer to the icon name
InitialNodeTool		Refer to the icon name
InkBrush		Refer to the icon name
InkCanvasControl		Refer to the icon name
InkPresenter	1/4	Refer to the icon name
Inline		Refer to the icon name
InputChevron	>>>	Refer to the icon name
InputHidden	abl	Refer to the icon name
InputOutput		Refer to the icon name

		, , , , , , , , , , , , , , , , , , ,
	← ⇒	
InputParameter	•	Refer to the icon name
InputPinTool	→ ■	Refer to the icon name
InputResetputSubmit		Refer to the icon name
InsertClause	← c	Refer to the icon name
InsertColumn	¥1	Refer to the icon name
InsertFieldColumn	智	Refer to the icon name
InsertLayer		Refer to the icon name
InsertMark	\$	Refer to the icon name
InsertOWSListField		Refer to the icon name
InsertPage		Refer to the icon name
InsertPanel		Refer to the icon name
InsertParameter		Refer to the icon name
InsertSharedStep	•	Refer to the icon name
InsertSnippet	ta	Refer to the icon name
InsertSpan	→ :	Refer to the icon name
InsertStep	→	Refer to the icon name
Inspect		Refer to the icon name

http://localhost:3000/ 108/455

	7	
InspectMode	(0)	Refer to the icon name
InstallerClass	J ^C C	Refer to the icon name
InstallFromHardDrive	✓	Refer to the icon name
InstallFromHardDrivePartial	■ 🚣	Refer to the icon name
InstallFromSource	7	Refer to the icon name
InstallFromSourcePartial		Refer to the icon name
Instance		Refer to the icon name
IntelliSenseDatabase		Refer to the icon name
IntelliSenseKeyword	먈	Refer to the icon name
IntelliTrace	5	Refer to the icon name
IntelliTraceEvent	<u> </u>	Refer to the icon name
InteractionUse		Refer to the icon name
InteractiveMode	*	Refer to the icon name
Interface	•••	Refer to the icon name
InterfaceFile	\Box	Refer to the icon name
InterfaceFriend	•••	Refer to the icon name
InterfacePrivate		Refer to the icon name

http://localhost:3000/ 109/455

	 0	
InterfaceProtect	*	Refer to the icon name
InterfaceSealed	•••	Refer to the icon name
InterfaceShortcut	•••	Refer to the icon name
InterfaceSnippet	•••	Refer to the icon name
InterOp	71	Refer to the icon name
IntersectPath	P	Refer to the icon name
InUseByOtherUser	2	Refer to the icon name
InvokeDelegate	5 1	Refer to the icon name
InvokeMethod		Refer to the icon name
InvokeTable		Refer to the icon name
IoTChip		Refer to the icon name
IPAddressControl	***	Refer to the icon name
IrregularSelection		Refer to the icon name
ISCatalog	₽.	Refer to the icon name
IsEmptyDynamicValue	Ž	Refer to the icon name
Italic	1	Refer to the icon name
Item		Refer to the icon name

ItemAddedAssociation	() +	Refer to the icon name	
ItemID		Refer to the icon name	
ItemListView	•	Refer to the icon name	
ItemUpdatedAssociation	Ca	Refer to the icon name	
JARFile		Refer to the icon name	
JavaSource		Refer to the icon name	
Join		Refer to the icon name	
JoinNode	**	Refer to the icon name	
Journal Message		Refer to the icon name	
JS	JS	JS in javascript orange	
JSAPIScript	API	Javascript icon with API modifier	
JSApplication		App window with JS modifier	
JSAzureApplication	6	App window with cloud modifier for Azure, JS modifier for language	
JSBlankApplication		Blank app icon with JS modifier	
JSCoffeeScript		Cup icon with JS modifier	
JSConsole	C:\	Console icon in JS orange	
JSCordovaMultiDevice		Cube in a cube in JS orange	

JSFixedLayoutApplication		App icon with ruler modifer in JS orange
JSGridApplication		App icon with grid modifer in JS orange
JSHubApplication	E I	App icon with hub modifer in JS orange
JSInteractiveWindow	==	App icon in JS orange with code lines
JSNavigationApp		App icon with button arrow modifer in JS orange
JSONDocumentOutline	0=	Bullet list icon with JSON modifier
JSONScript	J	Script icon with JSON modifier
JSPhone		Mobile phone icon in JS orange
JSPhoneError	8	Mobile phone icon in JS orange and error modifer
JSScript	ר	Orange script icon means javascript
JSSplitApplication		App icon with split window modifier
JSTablet		Tablet icon in JS orange
JSWeb		Globe in JS orange
JSWebScript	P	Globe icon with JS orange script modifier
JSWorker	\$	Document icon with JS orange gear for worker
JSXScript		Script icon with database in angle brackets modifer
JustMyCode		User icon inside curly braces

http://localhost:3000/ 112/455

	{\times}	
KagiChart	<u></u>	Refer to the icon name
KeepTargetVersion	<u>,</u> D	template with arrow pointing to document
Key	- O	Skeleton key
KeyError	118	Skeleton key with error modifier
KeyWarning	™	House key with warning modifier
KeywordSnippet	旦	Refer to the icon name
KPI	=	Horizontal bar graph
KPIBrowserView	5 0	KPI icon with magnifying glass
KPIWarning	4	KPI icon with warning modifier
Label	Α	The letter A, sans serif
LandingPage	Ħ	Refer to the icon name
LanguagePackageApplication	果习	lower case a with package modifier (or app icon with a and modifer)
Large		Refer to the icon name
Lasso	Q	drawing tool
LaunchConditionsEditor	園	Editor icon with filter modifer
LaunchInstrumentationTargetBinary	0101	binary icon with green cursor arrow modifier
LaunchSamplingTarget		sample icon with green play arrow

http://localhost:3000/ 113/455

		modifier
LayerDiagram		Refer to the icon name
LayerFillSlider	-4-	drawing tool
LayerMask	0	drawing tool
LayerTool		drawing tool
LayoutEditorPart		Refer to the icon name
LayoutTransform		drawing tool
LeftCarriageReturn	►¶	Refer to the icon name
LeftColumnOf2ColumnsRightSplit		column layout selector
LeftColumnOfFourColumns		column layout selector
LeftColumnOfThreeColumns	II	column layout selector
LeftColumnOfTwoColumns		column layout selector
LeftSideOnly		Refer to the icon name
LegacyPackage	\bigcirc	Document with 3D cube
Legend		Refer to the icon name
Level	A.	Refer to the icon name
LevelAll	_	Refer to the icon name
Library		Library books icon

LibraryEnvironment		Environment icon with library modifier
LibraryProject		App icon with Library book modifier
LibrarySetting	₩	Library icon with settings (gear) modifier
LibraryVirtualMachine		Virtual machine icon with library book modifier
Lifeline	₽	Refer to the icon name
Lightbulb	T .	Refer to the icon name
LightSwitch	•	Refer to the icon name
LightSwitchLibrary		Lightbulb icon with library modifier
LinearAxis	123	Axis icon with 123 meaning linear
LinearCarousel	I Ie	Refer to the icon name
LineArrow	7	Curved arrow pointing down
LineChart		line chart
LineMarkerArrow	-	Refer to the icon name
Link	@	Refer to the icon name
LinkAlert	@	Link icon with alert modifier
LinkBug	E)	Linked bug.
LinkButton		Refer to the icon name

http://localhost:3000/ 115/455

	<u>ab</u>	
LinkedDimension		Dimension icon with a link icon modifier
LinkedFolder	7	Folder with shortcut icon modifier
LinkedFolderOpen	7	Open folder with shortcut icon modifier
LinkedMeasureGroup	[4]	Measure group icon with link modifier
LinkedObject	Ŷ _Ö	3D cube with link modifier
LinkedServer	C)	Server icon with link modifier
LinkedTable	<u></u>	Table icon with link modifier in the middle
LinkedTableGroup	<u>ම</u>	Grouped table icon with link modifier in the middle
LinkFile	Po	Document icon with link modifier
LinkValidator	®	Checkmark icon with link modifier
ListBox		List box
ListBoxSearch	5 ÷	Listbox icon with magnifier
ListDefinition		Refer to the icon name
ListFolder		Folder icon with list icon modifier
ListFolderOpen		Open folder icon with list icon modifier
ListID		Datasheet icon with key icon modifier for ID
ListMembers		Retrieve history command, same as

http://localhost:3000/ 116/455

	V =	pressing keyboard down.
ListOfTest	ME I	Checklist in document with test beaker modifier
ListProperty		Datasheet icon with curved arrow modifier pointing at it
ListTime	6	Refer to the icon name
ListView		Refer to the icon name
ListViewMoCo	原	Refer to the icon name
ListViewTable		Table icon with list view modifier
Literal	a	Refer to the icon name
LiveDatasource		Database icon sitting on a connector icon
Loading	• • • •	Refer to the icon name
LoadTest	<u> </u>	Test icon with down arrow modifier
LoadTestPlugin	‡ △	Test icon with down arrow modifier and add (plus sign) modifier
LOBSystemInstance	_{iD} ₩	Refer to the icon name
LocalFeedback	2	Hard drive with feedback bubble
LocalFileSites		Open folder with magnifier modifier
LocalIISSites		Server icon with globe modifier
Localize	a	Refer to the icon name
LocalOffset		Refer to the icon name

LocalResources		Refer to the icon name
LocalServer	=	White Server icon
LocalsWindow	[4;]	Class icon inside straight brackets
LocalTest	Ţ.	Server icon with test modifier
LocalVariable	[Variable (or field) icon inside straight brackets
LocateAllControls	B	double magnifying glasses
LocateControl	۾	Control icon (rectangle) with magnifying glass modifier
Lock	f	Refer to the icon name
LockXAxis	ΩX	X with lock modifier
LockYAxis	êΥ	Y with lock modifier
LockZAxis	_a Z	Z with lock modifier
Log		Notebook
LogEvent	4	Log icon with event icon in the middle
Logical Data Center Diagram	=!=!	2 server icons connected
Logical Memory Configuration	T	Memory chip with wrench modifier
Login	ρ	User icon with a lock icon
LoginName		textbox with lock icon modifier

http://localhost:3000/ 118/455

	abl	
LoginScreen	***	App icon with password xs and lock modifer
LoginStatus		Lock with generic status icon modifier
LoginWindowsAuthentication		Server icon with double user modifier
LogProvider		Log icon with left arrow modifier
LookupChoiceFieldIndex	%	Refer to the icon name
LookupGroup		User in a box icon with magnifier modifier
LookupGroupMembers	2	Double user icon with magnifier modifier
LookupList	al l	datasheet icon with magnifier modifier
LookupListItem	Ê	List item icon with magnifier modifier
LookupListItemId	<u></u>	List item icon with magnifier modifier and key modifier for ID
LookupPrincipal		User in a box icon with user modifier
LookupPrincipalId		User in a box icon with user modifier and key modifier for ID
LookupPrincipalProperty	\$	User in a box icon with user modifier and wrench modifier for property
LookupUser	2	User icon with magnifier modifier
LookupUserProperty		User icon with magnifier modifier and wrench modifier for property
LookupWorkflowContextProperty	É	Workflow icon with wrench modifier
Loop		Loop with 2-way arrows


http://localhost:3000/ 119/455

	\Leftrightarrow	
LowResolution	5	Phone with large shapes to show low resolution
MageProductIcon		Refer to the icon name
MagicWand	E. C.	Refer to the icon name
Mail		Refer to the icon name
MainMenuControl		Refer to the icon name
MakeFile		Refer to the icon name
MakefileProject		Refer to the icon name
MakeSameHeight	\$	Refer to the icon name
ManageCounterSets	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Refer to the icon name
ManagedObject	4	Refer to the icon name
Manifest		Refer to the icon name
ManualTest	♦ □	Refer to the icon name
ManyToMany	ĈS,	Refer to the icon name
MapFriend	O-π ♥	Refer to the icon name
MapItem	От <u></u>	Refer to the icon name
MapItemFirend	₽	Refer to the icon name
MapItemPrivate		Refer to the icon name

http://localhost:3000/ 120/455

MapItemProtect	₽ "	Refer to the icon name
MapItemSealed		Refer to the icon name
MapItemShortcut	OT E	Refer to the icon name
MapLayerWizard	135	Refer to the icon name
MapLineLayer	27/2	Refer to the icon name
MappedBreakpoint	0	Refer to the icon name
MappedBreakpointDisable	•	Refer to the icon name
MappedTracepointDisable	♦	Refer to the icon name
MapPolygonLayer		Refer to the icon name
MapPrivate	о _т •	Refer to the icon name
MapProtected	О-п *	Refer to the icon name
MapSealed	О п ⊘	Refer to the icon name
MapShortcut	О- п	Refer to the icon name
MapTileLayer	K	Refer to the icon name
MapToFolder		Refer to the icon name
MapWizard		Refer to the icon name
MarginPadding		Refer to the icon name

http://localhost:3000/ 121/455

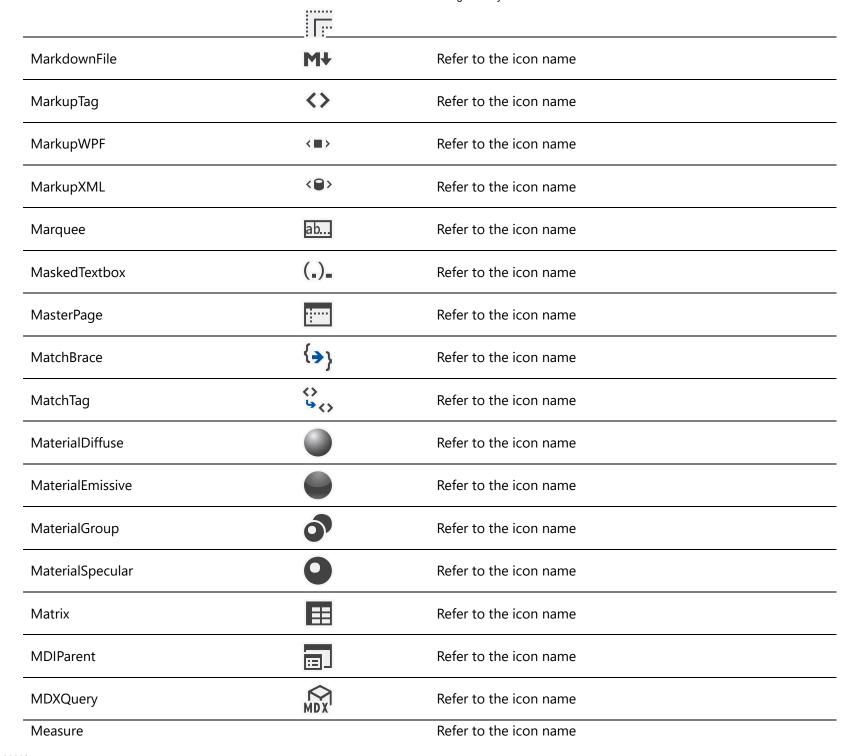


	<u>nl</u>	
MeasureCalculate	П	Refer to the icon name
MeasureExpression	$\Pi_{f_{\mathcal{X}}}^{\mathbf{I}}$	Refer to the icon name
MeasureTree	뭠	Refer to the icon name
Media	[b]	Refer to the icon name
MediaZoom	Ó	Refer to the icon name
Medium		Refer to the icon name
Member	9	Refer to the icon name
MemberCalculate	P	Refer to the icon name
MemberData	•	Refer to the icon name
MemberError	%	Refer to the icon name
MemberFolder	6	Refer to the icon name
MemberFolderOpen	6	Refer to the icon name
MemberFormula	fx	Refer to the icon name
MemberUnknown	Q ₀	Refer to the icon name
MemberVariable	®	Refer to the icon name
Memory		Refer to the icon name
MemoryArray		Refer to the icon name

http://localhost:3000/ 123/455

MemoryChip		Refer to the icon name
Menultem		Refer to the icon name
MenultemCustomAction	同	Refer to the icon name
MenuSeparator	_	Refer to the icon name
Merge	1	Refer to the icon name
MergeChangeTool	*	Refer to the icon name
MergeModule	1==	Refer to the icon name
MergeModuleExclude	1	Refer to the icon name
MergeModuleReference	↑	Refer to the icon name
MergeModuleReferenceExclude	■-	Refer to the icon name
Message		Refer to the icon name
MessageError		Refer to the icon name
MessageGroupError	8	Refer to the icon name
MessageLogTrace	M	Refer to the icon name
MessageQueue		Refer to the icon name
MessageQueueError	\cute{\cie\cute{\cute{\cute{\cute{\cute{\cute{\cute{\cute{\cute{\cute{\ci	Refer to the icon name
MessageQueueWarning		Refer to the icon name

http://localhost:3000/ 124/455

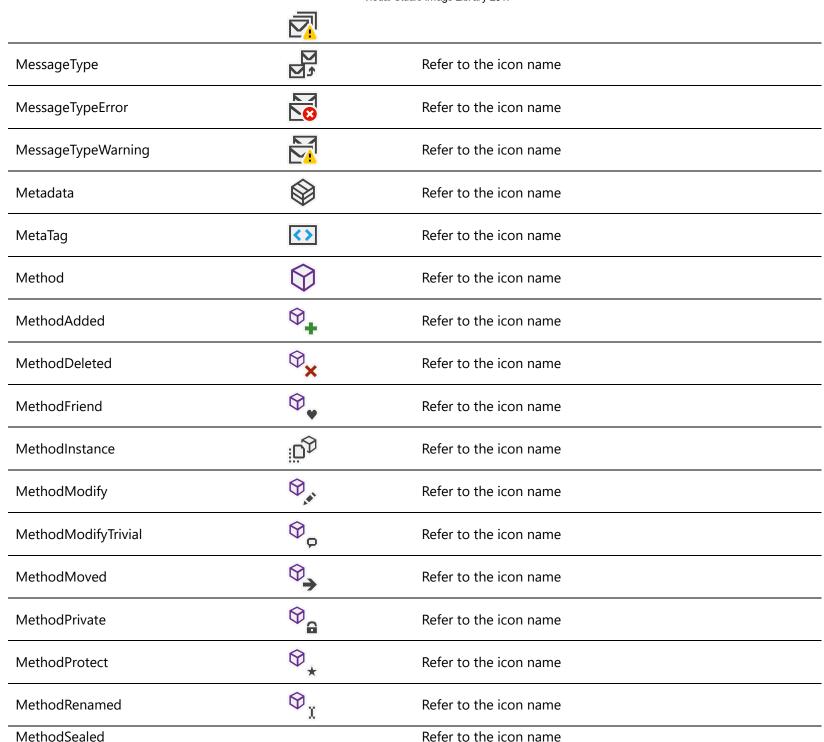

	Θ_{\emptyset}	
MethodSet		Refer to the icon name
MethodShortcut		Refer to the icon name
MethodSnippet	₩	Refer to the icon name
MFC	M F C	Refer to the icon name
MFCActiveX	MX	Refer to the icon name
MFCApplication	M F C	Refer to the icon name
MFCClass	M T	Refer to the icon name
MFCDLL	M D	Refer to the icon name
MFCLibrary	M F CE	Refer to the icon name
MFCODBCConsumerWizard	M F C	Refer to the icon name
MFile	m	*.m and *.mm source file for Objective-C.
MicMute	00	Refer to the icon name
MiddleColumnOfThreeColumn		Refer to the icon name
MiddleRowOfThreeRows		Refer to the icon name
Minimap	← [↑] →	Refer to the icon name
Minimize	_	Refer to the icon name
Misc		Refer to the icon name

http://localhost:3000/ 126/455

	<u> </u>	
MiterJoint		Refer to the icon name
MobileClass	T. T.	Refer to the icon name
MobileLibrary		Refer to the icon name
MobileService	Ξ.	Refer to the icon name
MobileServiceGroup		Refer to the icon name
MobileUserControl	<u> </u>	Refer to the icon name
MobileWeb		Refer to the icon name
MobileWebConfig	4	Refer to the icon name
MockupComponentGreen	W)	Refer to the icon name
MockuplconGreen	-	Refer to the icon name
ModalPicker	63 	Refer to the icon name
ModalPopup	N.v.	Refer to the icon name
Model3D		Refer to the icon name
Module	=	Refer to the icon name
ModuleError	■ ■	Refer to the icon name
ModuleFile	<u>.</u> D	Refer to the icon name
ModuleFirend		Refer to the icon name

	- ,	
ModulePrivate	-	Refer to the icon name
ModuleProtect	*	Refer to the icon name
ModuleSealed	= 0	Refer to the icon name
ModuleShortcut	7	Refer to the icon name
ModuleWindow	==	Refer to the icon name
MoneyEditor		Refer to the icon name
Monitor	₽	Refer to the icon name
MonthCalendar		Refer to the icon name
MotherboardDevice	HE	Refer to the icon name
MoveField	*	Refer to the icon name
MoveGlyph	\Phi	Refer to the icon name
MoveToSubmodule	→	Refer to the icon name
MSDN	msdn	Refer to the icon name
MSHelpIndexFile		Refer to the icon name
MSHelpTableOfContent		Refer to the icon name
MSMQConnection	ğ	Refer to the icon name
MSNETFrameworkDependencies		Refer to the icon name

http://localhost:3000/ 128/455

	:	
MTL		Refer to the icon name
MultiFileConnection	Ď	Refer to the icon name
MultiFlatFileConnection	Ē	Refer to the icon name
MultipleOutputExclude		Refer to the icon name
MultiplyMember	*5	Refer to the icon name
MultiplyMemberFormula	jx.	Refer to the icon name
MultiScaleImage	M	Refer to the icon name
MultiView		Refer to the icon name
MutuallyExclusiveCheckbox		Refer to the icon name
NaiveBayes		Refer to the icon name
NamedCache	5	Refer to the icon name
NamedSet	{}	Refer to the icon name
Namespace	{}	Refer to the icon name
NamespaceFriend	{ }	Refer to the icon name
NamespacePrivate	{ }	Refer to the icon name
NamespaceProtect	{ } _*	Refer to the icon name
NamespaceSealed		Refer to the icon name

http://localhost:3000/ 129/455

		violati ottatio initage 127 ary 10 m
	{ }	
NamespaceShortcut	{ }	Refer to the icon name
NamespaceSnippet	{ }!!	Refer to the icon name
NavigateElement	4	Refer to the icon name
NavigateMenu	節	Refer to the icon name
NavigationApp		Refer to the icon name
NavigationPath	•>•>	Refer to the icon name
NavigationProperty	5	Refer to the icon name
NegativeMessage	\searrow	Refer to the icon name
NeighborhoodBrowseMode		Refer to the icon name
NestedTable		Refer to the icon name
Network	===	Refer to the icon name
NetworkAdapter	1110	Refer to the icon name
NetworkAdapterConfiguration	F	Refer to the icon name
NetworkHub	<u></u>	Refer to the icon name
NetworkNDISDriver	<u>ত্</u>	Refer to the icon name
NetworkNDISDriverPackage	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Refer to the icon name
NeuralNetwork		Refer to the icon name

http://localhost:3000/ 130/455

		3
	<u></u>	
NewAggregation	* }∑	Refer to the icon name
NewAttribute	* @	Refer to the icon name
NewAttributeRelationship	*>	Refer to the icon name
NewAvailability	*1	Refer to the icon name
NewBottomFrame	*-	Refer to the icon name
NewBug	*	Refer to the icon name
NewCalculatedColumn	***	Refer to the icon name
NewCalculatedMember	*	Refer to the icon name
NewCatalog	*=	Refer to the icon name
NewChangeset	***	Refer to the icon name
NewClass	****	Refer to the icon name
NewConnection	* ♥	Refer to the icon name
NewConsole	*-	Refer to the icon name
NewConstant	*=	Refer to the icon name
NewCounterSet	*_~	Refer to the icon name
NewCube	*>	Refer to the icon name
NewCubeSlice		Refer to the icon name

http://localhost:3000/ 131/455

		3
	<u>* </u>	
NewDashboard	*	Refer to the icon name
NewDataCompare	*	Refer to the icon name
NewDataMiningDimension	类	Refer to the icon name
NewDeploymentManifest	*-	Refer to the icon name
NewDeploymentPackage	* 7	Refer to the icon name
NewDiagram	*7	Refer to the icon name
NewDimensionTranslation	*/ #/	Refer to the icon name
NewDrillThroughAction	*>	Refer to the icon name
NewEvent	**	Refer to the icon name
NewField	*	Refer to the icon name
NewFile	*	Refer to the icon name
NewFileCollection	*~	Refer to the icon name
NewFilter	*	Refer to the icon name
NewFromMasterPage	*=	Refer to the icon name
NewHeaderFile	*6	Refer to the icon name
NewImage	*	Refer to the icon name
NewImageType		Refer to the icon name

http://localhost:3000/ 132/455

		5 ,
		
NewItem	*-	Refer to the icon name
NewKey	*2	Refer to the icon name
NewKPI	*-	Refer to the icon name
NewLeftFrame	*	Refer to the icon name
NewLinkedWorkItem	*>	Refer to the icon name
NewLinkFile	₩	Refer to the icon name
NewListQuery	*=	Refer to the icon name
NewLoadTestPlugin	***	Refer to the icon name
NewManualTest	*	Refer to the icon name
NewManualTestMHTformat	*7	Refer to the icon name
NewMeasure	*	Refer to the icon name
NewMeasureGroup	* I]	Refer to the icon name
NewNameSet	* -}	Refer to the icon name
NewOneHopQuery	*3	Refer to the icon name
NewOrderedList	*1— 2—	Refer to the icon name
NewParameter	* @]	Refer to the icon name
NewPartition		Refer to the icon name

http://localhost:3000/ 133/455





	•	
NewPerformance	***	Refer to the icon name
NewPerformanceTrend	***	Refer to the icon name
NewPerspectiveView	★ ≥	Refer to the icon name
NewPHPFileHere	PHP	Refer to the icon name
NewProperty	*	Refer to the icon name
NewPullRequest	*1	Submit a new pull request. A pull request is a merge request that asks the remote branch to accept changes from the local repository.
NewQuery	*4	Refer to the icon name
NewRecording	* 5	Refer to the icon name
NewRelationship	*=	Refer to the icon name
NewReportingAction	*	Refer to the icon name
NewRequestPlugin	*	Refer to the icon name
NewRequestwithPayload	*67	Refer to the icon name
NewRightFrame	*	Refer to the icon name
NewRow	*	Refer to the icon name
NewRule	*\R	Refer to the icon name
NewRuleWarning	* ,⊓ L∕ <mark>.</mark>	Refer to the icon name

http://localhost:3000/ 134/455

NewRunSetting	₩ O	Refer to the icon name
NewScript	*	Refer to the icon name
NewSigningKey	*=====================================	Refer to the icon name
NewSimpleType	*1	Refer to the icon name
NewSolutionFolder	*	Refer to the icon name
NewStyleSheet	*3	Refer to the icon name
NewTable	*	Refer to the icon name
NewTeamGitRepository	* ••	Refer to the icon name
NewTeamProject	*•	Refer to the icon name
NewTest	**	Refer to the icon name
NewTestConfiguration	***	Refer to the icon name
NewTestConfigVariable	*>	Refer to the icon name
NewTestGroup	5 *	Refer to the icon name
NewTestList	*1	Refer to the icon name
NewTestPlan	**	Refer to the icon name
NewTextAnnotation	å∣b	Refer to the icon name
NewToolWindow		Refer to the icon name


http://localhost:3000/ 135/455

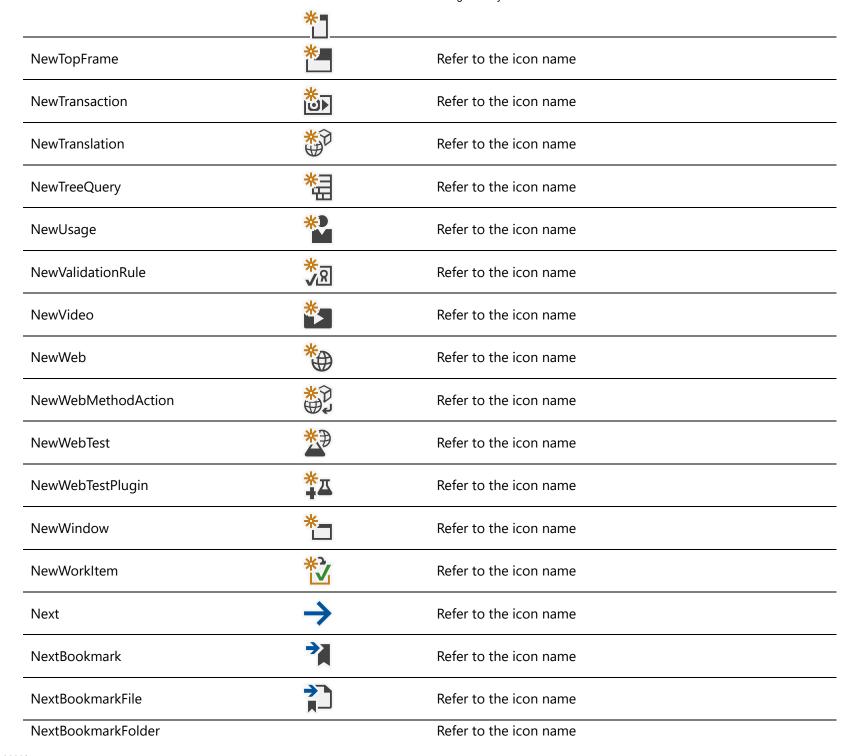

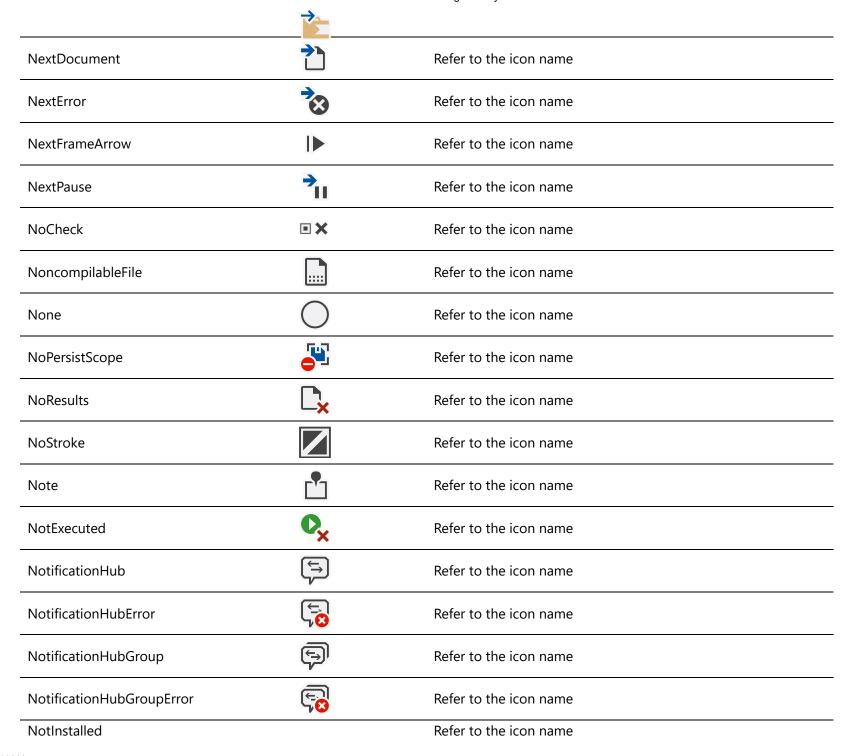

	X	
Numeric	#	Refer to the icon name
NumericListBox	1 <u>^</u> 2 v	Refer to the icon name
Object	==	Refer to the icon name
ObjectFile		Refer to the icon name
ObjectFriend	==	Refer to the icon name
ObjectLifetimeView	© *	Refer to the icon name
ObjectPrivate	<u> </u>	Refer to the icon name
ObjectProtect	==_*	Refer to the icon name
ObjectSealed	=-	Refer to the icon name
ObjectShortcut	<u></u>	Refer to the icon name
ODBCAttribute	8	Refer to the icon name
OneLevelUp	•	Refer to the icon name
OneWayBridge	\D	Refer to the icon name
OneWayRelay	→ ''))	Refer to the icon name
OnlineItemTemplate	(Refer to the icon name
OnlineItemTemplateDisableDownloadAva ilable	€0	Refer to the icon name
OnPremDatabase		Refer to the icon name

http://localhost:3000/ 138/455

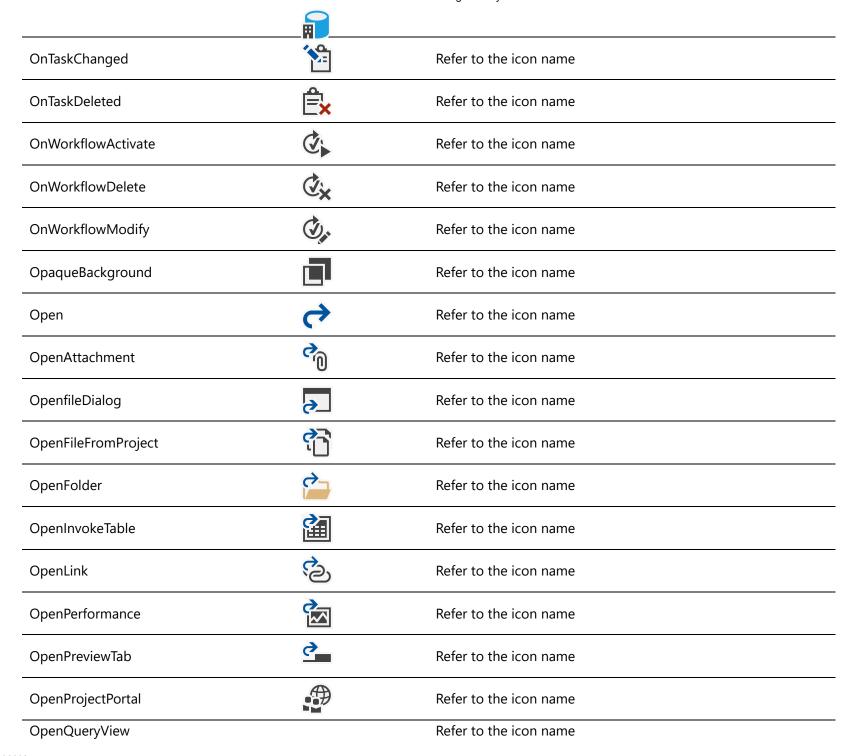

		3
OpenTopic	?	Refer to the icon name
OpenVirtualEnvironment		Refer to the icon name
OpenWeb		Refer to the icon name
Operator	=-	Refer to the icon name
OperatorFriend	≛ 7 ,	Refer to the icon name
OperatorPrivate	±7	Refer to the icon name
OperatorProtect	≛7 ★	Refer to the icon name
OperatorSealed	±7 0	Refer to the icon name
OperatorShortcut	<u>±7</u> ,	Refer to the icon name
OptimizePivotTable		Refer to the icon name
OptionsDropdown	☆ -	Refer to the icon name
OrderDown		Refer to the icon name
OrderedList	1 2 3	Refer to the icon name
OrderedTest	<u></u>	Refer to the icon name
OrderUp		Refer to the icon name
OrientPathNone	##	Refer to the icon name
OrientPathNormal		Refer to the icon name

	XXX	
OrleansSDK	•…•	Refer to the icon name
Orthographic Camera		Refer to the icon name
OutGoingCodeReview	Æ	Refer to the icon name
OutlineBorder		Refer to the icon name
OutlinedRectangleTool		Refer to the icon name
OutlinedRoundedRectangleTool	0	Refer to the icon name
OutlookData	5	Refer to the icon name
Outlook Design		Refer to the icon name
Output	-	Refer to the icon name
OutputExclude	-	Refer to the icon name
OutputGroup	<u> </u>	Refer to the icon name
OutputParameter	1 @	Refer to the icon name
OutputPinTool	-	Refer to the icon name
OverflowDropdown	₹	Refer to the icon name
OverlayStatic	Ξ	Refer to the icon name
OverloadBehavior	6	Refer to the icon name
OverwriteLocalVersion		Refer to the icon name

		•
	<u> </u>	
Package	#	Refer to the icon name
PackageDeployment	•	Refer to the icon name
PackageFolder		Refer to the icon name
PackageFolderOpen	H	Refer to the icon name
PackageProperty	ψ¥	Refer to the icon name
PackageWarning	F	Refer to the icon name
PageBody		Refer to the icon name
PageBodyGroup		Refer to the icon name
PageBreak		Refer to the icon name
PageCatalogPart		Refer to the icon name
PageContent		Refer to the icon name
PageFile		Refer to the icon name
PageFooter		Refer to the icon name
PageFooterGroup		Refer to the icon name
PageGuide		Refer to the icon name
PageHeader		Refer to the icon name
PageHeaderGroup		Refer to the icon name

http://localhost:3000/ 142/455



	iel'	
PageInspector	E	Refer to the icon name
PageItemTemplate	F	Refer to the icon name
PageLayout		Refer to the icon name
PageRedirect		Refer to the icon name
PageStyle	6	Refer to the icon name
PageTemplate		Refer to the icon name
PageTransition	,	Refer to the icon name
Paginator	[2]	Refer to the icon name
Paging	⇔'	Refer to the icon name
PagingBulletList	! —	Refer to the icon name
PaintBrush		Refer to the icon name
Pane		Refer to the icon name
Panel		Refer to the icon name
PaneLayout	i⊞	Refer to the icon name
Panel Drag Drop Target	■	Refer to the icon name
PanTool	Em	Refer to the icon name
Paragraph		Refer to the icon name

http://localhost:3000/ 143/455

	¶	
ParagraphHardReturn	. T	Refer to the icon name
Parallel	фф	Refer to the icon name
ParallelCallStack	(=	Refer to the icon name
ParallelForEach	00	Refer to the icon name
ParallelPort		Refer to the icon name
Parameter	[@]	Refer to the icon name
ParameterError	@	Refer to the icon name
ParameterWarning	@ <u>.</u>	Refer to the icon name
ParentChildAttributeDisable	뮤⊋	Refer to the icon name
Parent Child Relationship	E,	Refer to the icon name
ParenteChildAttribute	# 2	Refer to the icon name
ParseDynamicValue	<u> </u>	Refer to the icon name
PartiallyComplete	5	A progress bar filled half way.
Partition		Refer to the icon name
PartitionFunction	fx:	Refer to the icon name
PartitionFunctionError	fa &	Refer to the icon name
PartitionFunctionWarning		Refer to the icon name

		3
PartitionScheme	A	Refer to the icon name
PartitionSchemeError	H <mark>S</mark>	Refer to the icon name
PartitionSchemeWarning	A	Refer to the icon name
Parts	Ċ	Refer to the icon name
PartsWarning	Č.	Refer to the icon name
PassThroughBridge	⊕	Refer to the icon name
PasswordBox	**	Refer to the icon name
PasswordRecovery	* **	Refer to the icon name
PasswordStrength	**	Refer to the icon name
Paste	合	Refer to the icon name
PasteAppend	盘	Refer to the icon name
PasteReplace	龠	Refer to the icon name
PasteTable	俞	Refer to the icon name
PatchPackage		Refer to the icon name
Path		Refer to the icon name
Pathlcon	•	Refer to the icon name
PathListBox		Refer to the icon name

http://localhost:3000/ 145/455

	~	
PathListBoxItem		Refer to the icon name
PathMany	∞	Refer to the icon name
PathOne	1	Refer to the icon name
Pause	П	Refer to the icon name
PausePhoneLandscape	造	Refer to the icon name
PDWDest	***	Refer to the icon name
Pen1	E O	Refer to the icon name
Pen2	Ø.	Refer to the icon name
Pen3	H	Refer to the icon name
Pen4		Refer to the icon name
PenAddTool	+9	Refer to the icon name
PenDeleteTool	- ₽	Refer to the icon name
PendingCodeMap	<u> </u>	Refer to the icon name
PenPathConvert	N	Refer to the icon name
PenTool	<u>(1)</u>	Refer to the icon name
Percentage	%	Refer to the icon name
PerceptivePixel		Refer to the icon name

http://localhost:3000/ 146/455

	<u></u>	
Performance Diagnostics Graph		Refer to the icon name
PerformanceError	2	Refer to the icon name
PerformanceGroup		Refer to the icon name
PerformanceLog		Refer to the icon name
PerformanceMethod		Refer to the icon name
PerformanceReport		Refer to the icon name
PerformanceWarning		Refer to the icon name
PerformanceWizard		Refer to the icon name
PermissionFile	e M	Refer to the icon name
Persist	*	Refer to the icon name
PerspectiveCamera		Refer to the icon name
PerspectivesView		Refer to the icon name
PerspectiveTableGroup		Refer to the icon name
Phone		Refer to the icon name
PhoneDarkTheme		Refer to the icon name
PhoneDirect3D		Refer to the icon name
PhoneHorizontalPage		Refer to the icon name

	= :	
PhoneLandscape		Refer to the icon name
PhoneLandscapeFlip		Refer to the icon name
PhoneLibrary		Refer to the icon name
PhoneLightTheme		Refer to the icon name
PhoneMediumResolution	<u>5</u>	Refer to the icon name
PhoneNumberEditor		Refer to the icon name
PhoneNumberViewer		Refer to the icon name
PhonePanorama		Refer to the icon name
PhonePanoramaLandscape		Refer to the icon name
PhonePortraitFlip		Refer to the icon name
PhonePreviewThumbnail		Refer to the icon name
PhoneSimulation	₩	Refer to the icon name
PhoneTool	<u></u>	Refer to the icon name
PhoneVerticalPage	Ξ	Refer to the icon name
PhoneWarning		Refer to the icon name
PhoneWinRTComponentDLL		Refer to the icon name
PhoneXAML		Refer to the icon name

http://localhost:3000/ 148/455

		5
	√ ■> z	
PHPFile	PHP	Refer to the icon name
PickBranch	r \	Refer to the icon name
PickCursor	0	Refer to the icon name
Picker	•••	Refer to the icon name
PickerContract		Refer to the icon name
PickNode	4.	Refer to the icon name
PictureAndText		Refer to the icon name
PictureResample		Refer to the icon name
PieChart	•	Refer to the icon name
PinnedItem	A	Graphics IDE
Pipe		Refer to the icon name
PipeFolder		Refer to the icon name
PipeFolderOpen		Refer to the icon name
Pipeline		Refer to the icon name
PipelineView	204	Refer to the icon name
PipeTable		Refer to the icon name
PipeTableTemplate		Refer to the icon name


http://localhost:3000/ 149/455

	*,	Saar Staars Image Library 2517
PivotChart	3	Refer to the icon name
PivotControl	ab ↔	Refer to the icon name
PivotProject	abc	Refer to the icon name
PivotTable		Refer to the icon name
PixelRunFile	4	Refer to the icon name
Placeholder	\boxtimes	Refer to the icon name
PlaceholderAdapter	×	Refer to the icon name
Plan	7	Refer to the icon name
PlanePreview		Refer to the icon name
PlaybackPreview	Q*	Refer to the icon name
PlayDataGenerator		Refer to the icon name
PlayStep	-	Refer to the icon name
PlayStepGroup		Refer to the icon name
PlayVideo		Refer to the icon name
Plugged	ANY.	Refer to the icon name
PNPEntity		Refer to the icon name
PointAndFigureChart		Refer to the icon name


http://localhost:3000/ 150/455

		5 ,
	Xo	
PointChart	•••	Refer to the icon name
PolarChart	33	Refer to the icon name
Policy	<u>©</u>	Refer to the icon name
PolicyApplication	<u>R</u>	Refer to the icon name
PolicyFile	?	Refer to the icon name
PolicyFileWarning	₹	Refer to the icon name
Polygon		Refer to the icon name
PopBrowseContext	0 11	Refer to the icon name
Popln	L	Refer to the icon name
PopOut	7	Refer to the icon name
PopupControl		Refer to the icon name
PopupCursor	E	Refer to the icon name
PortToolToolboxBitmap	G	Refer to the icon name
PositionPage	#	Refer to the icon name
Positive Message	\searrow	Refer to the icon name
PostDeploymentScript		Refer to the icon name
PostDeploymentScriptError		Refer to the icon name

http://localhost:3000/ 151/455

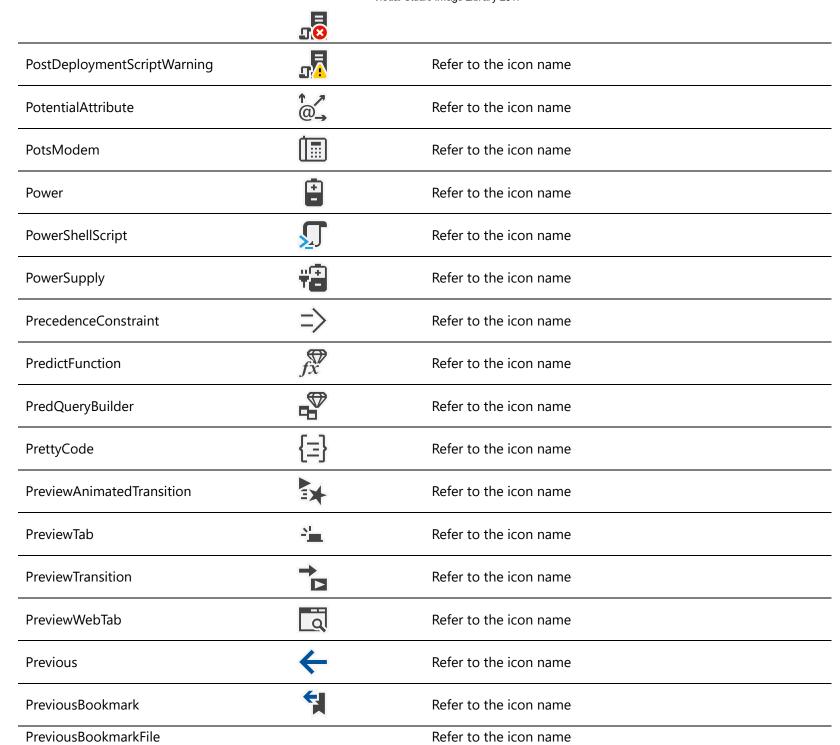

	<u> </u>	
PreviousBookmarkFolder	(Refer to the icon name
PreviousError	***	Refer to the icon name
PreviousFrame	∢	Refer to the icon name
PrimaryKeyCalculate	EF P	Refer to the icon name
PrimaryKeyRowGlyph	Ę.	Refer to the icon name
Print	-	Refer to the icon name
PrintDialog	=	Refer to the icon name
PrintDocument	₽	Refer to the icon name
PrintPreview		Refer to the icon name
PrintPreviewDialog)	Refer to the icon name
PrintPreviewFourPages	H	Refer to the icon name
PrintPreviewMaxPages	***	Refer to the icon name
PrintPreviewOnePage		Refer to the icon name
PrintPreviewSixPages	:::	Refer to the icon name
PrintPreviewThreePages	B	Refer to the icon name
PrintPreviewTwoPages	Ш	Refer to the icon name
PrintSetup		Refer to the icon name

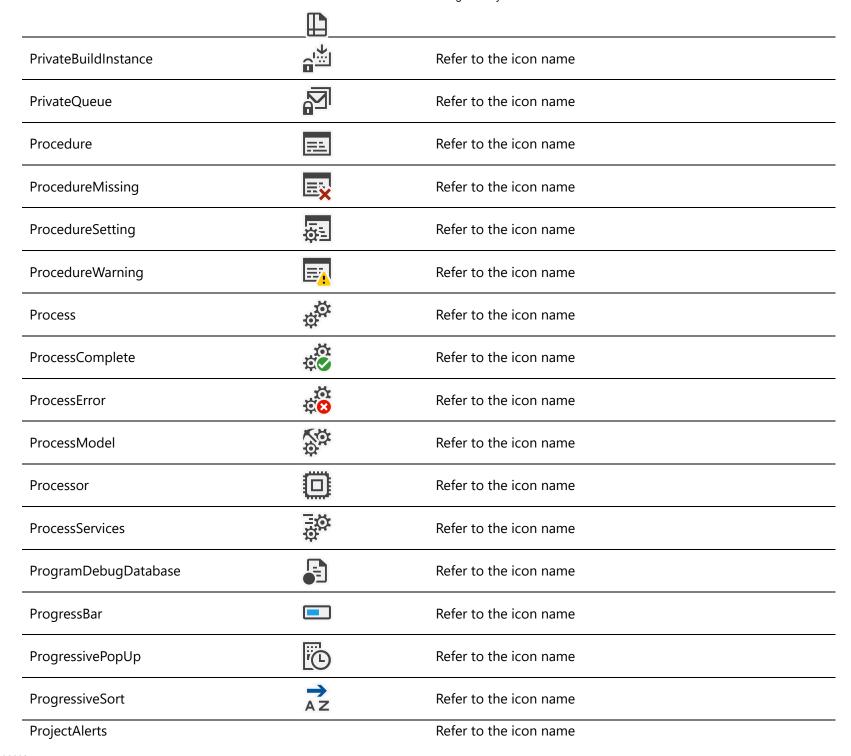

ProjectFilterFile		Refer to the icon name
ProjectFolderOpen		Refer to the icon name
ProjectLoadVeto	X	Used in VS Project System Extensibility. A type of item template. Used in VS Project System Extensibility. A type of item template where you can define what behaviors are available in the project type.
ProjectProperty		Refer to the icon name
Project System File Group Default		Refer to the icon name
ProjectSystemModelRefresh	6	Refer to the icon name
ProjectSystemSqlCommandVariables		Refer to the icon name
ProjectSystemToggleViewBySchema	盎↓	Refer to the icon name
ProjectXML	XML	Refer to the icon name
PromoteLocal	7	Refer to the icon name
PromoteTab		Refer to the icon name
Property	عر	Refer to the icon name
PropertyAdded	84	Refer to the icon name
PropertyBrushCreate	to	Refer to the icon name
PropertyBrushGroup		Refer to the icon name


http://localhost:3000/ 155/455

PropertyDeleted	F _X	Refer to the icon name
PropertyFriend	\$,	Refer to the icon name
PropertyGridEditorPart		Refer to the icon name
PropertyKey	ψE	Refer to the icon name
PropertyModify	8,	Refer to the icon name
PropertyModifyTrivial	\$ 0	Refer to the icon name
PropertyMoved	<i>₽</i> →	Refer to the icon name
PropertyPrivate	٩	Refer to the icon name
PropertyProtect	\$ *	Refer to the icon name
PropertyRenamed	F	Refer to the icon name
PropertySealed	\$ _0	Refer to the icon name
PropertyShortcut	\$ _2	Refer to the icon name
PropertySnippet	انغ	Refer to the icon name
ProvidedInterface	\$O	Refer to the icon name
ProxyWebPartManager	S °	Refer to the icon name
PseudoClass	a:	Refer to the icon name
PublicQueue		Refer to the icon name

http://localhost:3000/ 156/455

PublishAllWebsite		Refer to the icon name
PublishCurrentWebsite		Refer to the icon name
PullRequest	£	Pull Request command for distributed version control like Git
Pulse	-	Refer to the icon name
PushNotification	Ç®	Refer to the icon name
PushNotificationError	Ç <mark>€</mark>	Refer to the icon name
PushNotificationGroup	Ç [®]	Refer to the icon name
Pushpin		Refer to the icon name
PushpinUnpin	-	Refer to the icon name
PY	PY	Refer to the icon name
PYApplication		Refer to the icon name
PYBlankApplication		Refer to the icon name
PYBlankWeb		Refer to the icon name
PYClassFile		Refer to the icon name
PYClassLibrary		Refer to the icon name
PYConsole	C:V	Refer to the icon name
PYDebugInteractiveWindow	色	Refer to the icon name
PYFile		Refer to the icon name

http://localhost:3000/ 157/455

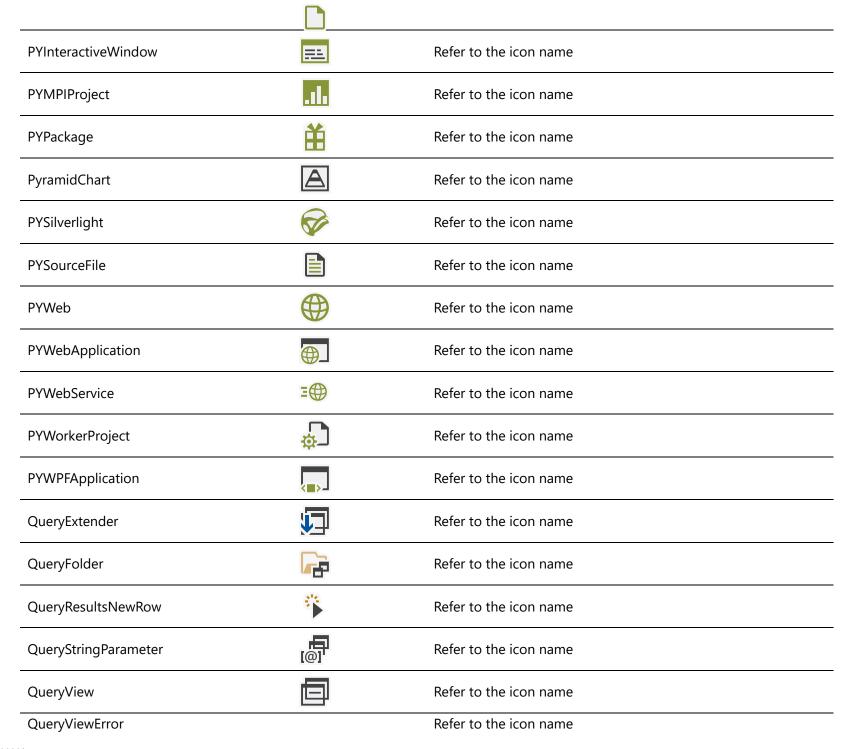

	<u> </u>	
QueryViewMissing		Refer to the icon name
QueryViewWarning		Refer to the icon name
Question	?	Refer to the icon name
QuickFind	<u>=</u>	Refer to the icon name
QuickRefresh	*	Refer to the icon name
QuickReplace	c c	Refer to the icon name
Quote	"ab"	Refer to the icon name
RadarChart		Refer to the icon name
RadialGradient		Refer to the icon name
RadioButton	0	Refer to the icon name
RadioButtonList	•	Refer to the icon name
RangeChart		Refer to the icon name
RangeColumnChart	111	Refer to the icon name
RangeValidator	<u>√</u> 2≻	Refer to the icon name
Rating	*1	Refer to the icon name
RawCodeCoverageDataFile		Refer to the icon name
RB		Refer to the icon name

	RB		
RBFile	RB	Refer to the icon name	
ReadOnlyDatabase	a	Refer to the icon name	
Reason	•	Refer to the icon name	
Rebase	1	Git command Rebase means reapply commits from other branch and merge to the top branch	
RecalculatePageBreaks		Refer to the icon name	
ReceiveAndSendReply	**	Refer to the icon name	
ReceiveMail	*	Refer to the icon name	
ReceiveReply		Refer to the icon name	
RecommendedTest	***	Refer to the icon name	
Record		Refer to the icon name	
RecordAlert	0	Refer to the icon name	
RecordDot		Refer to the icon name	
RecordKeyframe	+0	Refer to the icon name	
RecordNotStarted	Q	Refer to the icon name	
RecordScreen	<u> </u>	Refer to the icon name	
RecordScreenVoice		Refer to the icon name	
·	· · · · · · · · · · · · · · · · · · ·		_

http://localhost:3000/ 160/455

RecordStep	0	Refer to the icon name
Rectangle		Refer to the icon name
RectangleSelectionTool		Refer to the icon name
RectangularScreenshot	0	Refer to the icon name
RectangularSelection	N.	Refer to the icon name
Recursion	恒	Refer to the icon name
RecursivelyCheckAll	4	Refer to the icon name
RecursivelyUncheckAll	* □	Refer to the icon name
RedChannel	R	Refer to the icon name
RedirectedRequest	4	Refer to the icon name
Redo	G	Refer to the icon name
RedoMerge	2	Refer to the icon name
ReducelmageBrightness	↓ ☆	Refer to the icon name
ReducelmageContrast	₽ D	Refer to the icon name
Refactoring	<u>~</u>	Refer to the icon name
Reference	11-11	Refer to the icon name
ReferencedDimension	↑ / → →	Refer to the icon name
ReferencedElement		Refer to the icon name

http://localhost:3000/ 161/455

	•	
ReferenceWarning	- -	Refer to the icon name
Refetch	***	Refer to the icon name
ReformatSelection	Ç	Refer to the icon name
Refresh	U	Refer to the icon name
RefreshScript	c ₁	Refer to the icon name
RefreshServer	© =	Refer to the icon name
RegistersWindow	OX	Refer to the icon name
RegistrationScript	₽ <u>.</u>	Refer to the icon name
RegistrationScriptRGS	I	Refer to the icon name
Registry	*	Refer to the icon name
RegistryValueBinaryType	01	Refer to the icon name
RegistryValueStringType	ab	Refer to the icon name
RegularExpression	*	Refer to the icon name
Regular Expression Builder	(a)+	Refer to the icon name
Regular Expression Validator	Y X	Refer to the icon name
Relationship	8	Refer to the icon name
ReloadXML		Refer to the icon name

http://localhost:3000/ 162/455



	<⊌>	
RemoteDesktop	<u>-</u> 83	Refer to the icon name
RemoteFolder	8	Repository not yet cloned to desktop.
RemoteFolderOpen		Repository not yet cloned to desktop.
RemoteServer	-	Refer to the icon name
RemoteServiceBinding	Ξ ☆	Refer to the icon name
RemoteServiceBindingError	Ξ ₩ ± 8	Refer to the icon name
RemoteServiceBindingWarning	E O	Refer to the icon name
RemoteSites	(A) Littp	Refer to the icon name
Remove	_	Remove in contrary to Add.
RemoveAllDriverTests	$\mathcal{I}_{\Sigma}^{ imes}$	Refer to the icon name
RemoveEvent	7	Refer to the icon name
RemoveFromCollection	ð	Refer to the icon name
RemoveFromDictionary	T io	Refer to the icon name
RemoveGuide	×	Refer to the icon name
RemoveHorizontalSpace	 **	Refer to the icon name
RemoveLink	×	Refer to the icon name
RemoveMapping		Refer to the icon name

http://localhost:3000/ 163/455

	1	
RemoveNamespace	X }	Refer to the icon name
RemoveRow	萺	Refer to the icon name
RemoveSingleDriverTest	×	Refer to the icon name
RemoveVerticalSpace	‡	Refer to the icon name
Rename	X	Refer to the icon name
RenameLocalServer		Refer to the icon name
RenameRemoteServer	X	Refer to the icon name
RenderTransform	图	Refer to the icon name
RenkoChart	<u></u>	Refer to the icon name
Reorder	23	Refer to the icon name
ReorderList	不	Refer to the icon name
ReorderParameters		Refer to the icon name
ReorderTableColumn	e p	Refer to the icon name
Repair	EL PO	Refer to the icon name
ReparentBranch	□ ኅ Ա□	Refer to the icon name
RepeatButton	a 7	Refer to the icon name
RepeaterControl		Refer to the icon name

http://localhost:3000/ 164/455

ReplaceAll	ac ab	Refer to the icon name
ReplaceInFiles		Refer to the icon name
Report	<u> </u>	Refer to the icon name
ReportImage		Refer to the icon name
ReportingAction		Refer to the icon name
ReportParameter	@	Refer to the icon name
ReportProjectWizard	+ ∗ <u>□</u>	Refer to the icon name
ReportWarning		Refer to the icon name
Repository	-	Repository for version control
RequestBridge	∳ ⊕	Refer to the icon name
RequestPlugin	1	Refer to the icon name
RequestwithPayload	n D	Refer to the icon name
Required Field Validator	(0)	Refer to the icon name
RequiredInterface	dr.	Refer to the icon name
Rerun	Ç	Refer to the icon name
ResetTimelineView	ااا	Refer to the icon name
ResizableControl		Refer to the icon name

http://localhost:3000/ 165/455

Resize		Refer to the icon name
ResizeGrip	.::	Refer to the icon name
ResourceSymbols	ID:	Refer to the icon name
ResourceTemplate		Refer to the icon name
ResourceType		Refer to the icon name
ResourceView	P	Refer to the icon name
Restart	5	Refer to the icon name
RestoreDefaultView	2	Refer to the icon name
Restorelmage	%	Refer to the icon name
RestoreLocalServer	り =	Refer to the icon name
RestoreMTR		Refer to the icon name
RestoreSnapshot	%	Refer to the icon name
ResultToDataGrid	a	Refer to the icon name
ResultToRuleFile	R	Refer to the icon name
ResultToText	1	Refer to the icon name
ResumePhone		Refer to the icon name
RetargetApplication		For WPF Retarget/rebuild.

http://localhost:3000/ 166/455

Rethrow	==	Refer to the icon name
Retrieve		Refer to the icon name
Return	4	Refer to the icon name
ReturnParameter	[@]	Refer to the icon name
ReturnValue		Refer to the icon name
ReturnValueCollapsed		Refer to the icon name
ReturnValueExpanded	e	Refer to the icon name
ReturnVariableValue	2	Refer to the icon name
ReuseExistingProps	A:	Refer to the icon name
Reverse		Refer to the icon name
ReverseGradient		Refer to the icon name
ReversePath	4	Refer to the icon name
RibbonMenu	<u></u>	Refer to the icon name
RibbonMenuAction	P	Refer to the icon name
RichTextBox	□≡ =-A	Refer to the icon name
RichTextControl	野	Refer to the icon name
RichTooltip		Refer to the icon name

http://localhost:3000/ 167/455

	Ā	
RightBottomOf2ColumnsRightSplit	I *	Refer to the icon name
RightCarriageReturn	¶∢	Refer to the icon name
RightColumnOf2ColumnsLeftSplit		Refer to the icon name
RightColumnOfFourColumns		Refer to the icon name
RightColumnOfThreeColumns		Refer to the icon name
RightColumnOfTwoColumns		Refer to the icon name
RightFileOnly		Refer to the icon name
RightParentheses)	Refer to the icon name
RightTopOf2ColumnsRightSplit		Refer to the icon name
RigidRelationshipError	→8	Refer to the icon name
RigidRelationshipInfo	→	Refer to the icon name
Rigid Relationship Warning	→	Refer to the icon name
RoamingExtensionManager	a di	Roaming Extension Manager allows users to roam and download Visual Studio extionsions across machines.
Rocket	•	Logic App
Rotate		Refer to the icon name
RotateArrow	5	Refer to the icon name

http://localhost:3000/ 168/455

RotateLeft	5	Refer to the icon name
RotateRight	2	Refer to the icon name
RotateScreenLandscapeLeft	Ľ	Refer to the icon name
RotateScreenLandscapeRight	1	Refer to the icon name
RotateScreenPortraitLeft		Refer to the icon name
RoundCap		Refer to the icon name
RoundedCorners		Refer to the icon name
RoundedRectangleTool		Refer to the icon name
RoundJoint		Refer to the icon name
RoundRobinTable	::=	Round Robin table type for PDW extension
RouteService	三尊	Refer to the icon name
RouteService RouteServiceError	<u>\$</u> <u>=</u> \$ =\$\$	Refer to the icon name Refer to the icon name
RouteServiceError		Refer to the icon name
RouteServiceError RouteServiceWarning		Refer to the icon name Refer to the icon name
RouteServiceError RouteServiceWarning RowGroups	= *	Refer to the icon name Refer to the icon name Refer to the icon name
RouteServiceError RouteServiceWarning RowGroups RowLabels	≥÷	Refer to the icon name Refer to the icon name Refer to the icon name Refer to the icon name

		3 , .
	<u>R</u>	
RuleAdorner		Refer to the icon name
RuleAdornerLightsout		Refer to the icon name
RuleError	%	Refer to the icon name
Ruler	ппп	Refer to the icon name
RulerMeasure	V	Refer to the icon name
RuleWarning	9.	Refer to the icon name
Run		Refer to the icon name
RunChecked		Refer to the icon name
RunExclude	&	Refer to the icon name
RunFilter	7	Refer to the icon name
RunFromHardDrive	✓ •	Refer to the icon name
RunFromHardDrivePartial	•	Refer to the icon name
RunFromSource	☑ *•-	Refer to the icon name
RunFromSourcePartial		Refer to the icon name
RunMemorySampling		Refer to the icon name
RunPause	ð	Refer to the icon name
RunPerformance		Refer to the icon name


http://localhost:3000/ 170/455


RunPerformanceWithoutDebug		Refer to the icon name
RunQuery	ē	Refer to the icon name
RunTest	Z	Refer to the icon name
RunTestDialog	值	Refer to the icon name
RunThread	71.	Refer to the icon name
RunUpdate	(2)	Refer to the icon name
S	S	Refer to the icon name
SatusReady	•	Refer to the icon name
Save	H	Refer to the icon name
SaveAll	E E	Refer to the icon name
SaveAs		Refer to the icon name
SaveClose	X	Refer to the icon name
SaveFileDialogControl		Refer to the icon name
SaveTable	= =	Refer to the icon name
Scaffold		Refer to the icon name
ScalarFunction	fx	Refer to the icon name
ScalarFunctionError		Refer to the icon name



	•	
Scalar Function Warning	01 fx <mark>.</mark>	Refer to the icon name
Scale		Refer to the icon name
ScatterChart	• •	Refer to the icon name
ScatterLineChart	M	Refer to the icon name
ScatterView		Refer to the icon name
ScattlerSmoothLineChart	\boxtimes	Refer to the icon name
Schema	A	Refer to the icon name
SchemaAttribute	@	Refer to the icon name
SchemaCompare	To GT	Refer to the icon name
SchemaComplexObject	屈	Refer to the icon name
SchemaElement	<>	Refer to the icon name
SchemaError	₽	Refer to the icon name
SchemaObjectProperty	Ų. ^T	Refer to the icon name
SchemaRecord		Refer to the icon name
SchemaWarning	<u> </u>	Refer to the icon name
ScissorTest	یّ	Refer to the icon name
ScopeFile		Refer to the icon name


http://localhost:3000/ 172/455

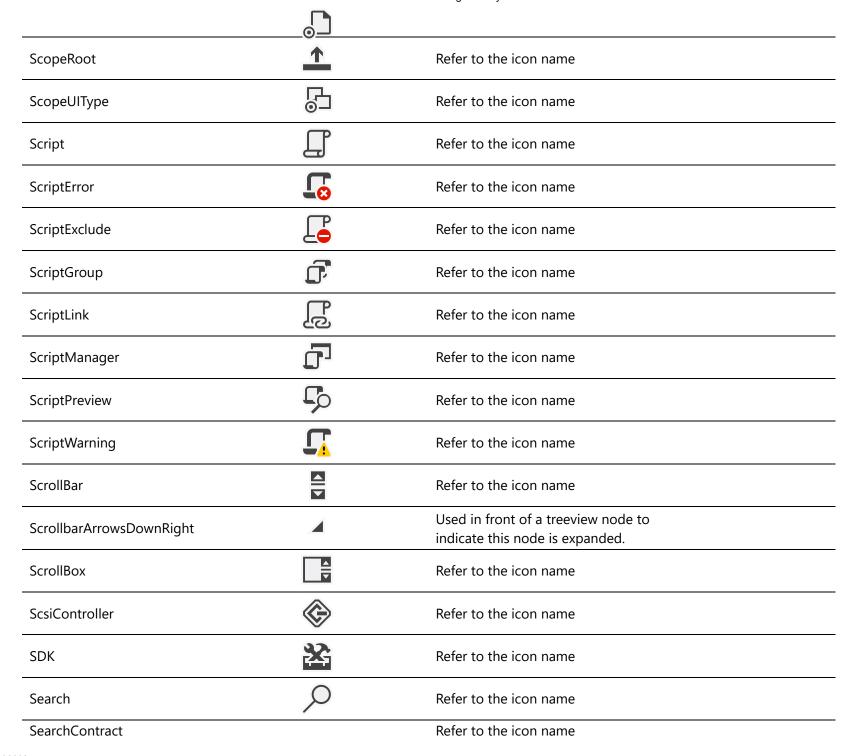

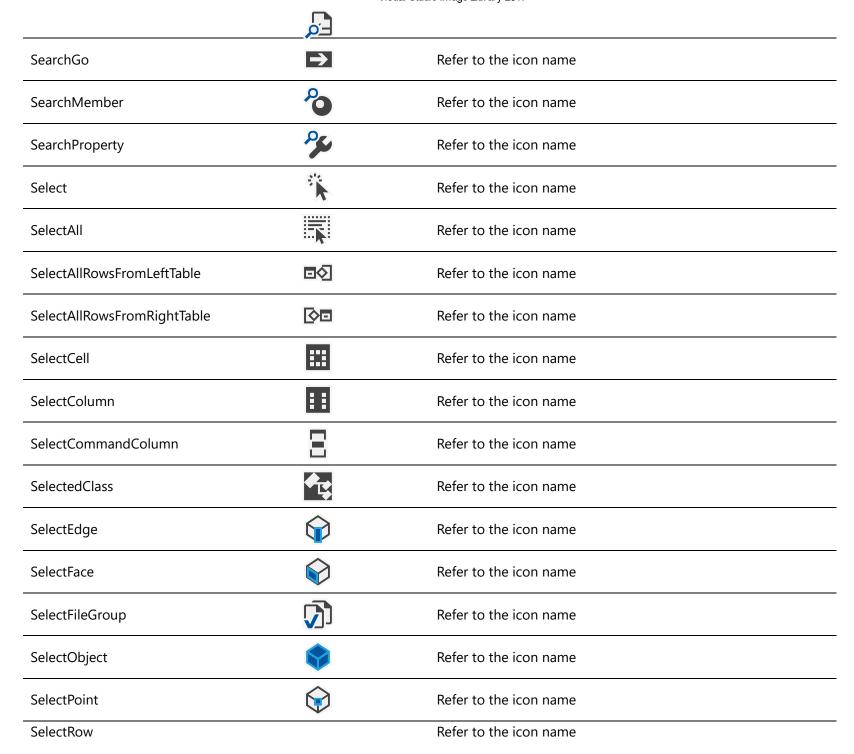

SelectTable		Refer to the icon name
SemanticZoom		Refer to the icon name
SendBackward	P	Refer to the icon name
SendEmail	1	Refer to the icon name
SendReceiveReply		Refer to the icon name
SendReply		Refer to the icon name
SendSignalActionTool		Refer to the icon name
SendTestMail	Ż	Refer to the icon name
SendtoBack		Refer to the icon name
SendtoFSI	雪	Refer to the icon name
SeparaterLine		Refer to the icon name
Separator	0 0	Refer to the icon name
Sequence	(*)	Refer to the icon name
SequenceCluster	- Par	Refer to the icon name
SequenceDiagram	₽₽ ₱→≬	Refer to the icon name
SequenceFile		Refer to the icon name
SerialKey		Refer to the icon name

http://localhost:3000/ 175/455

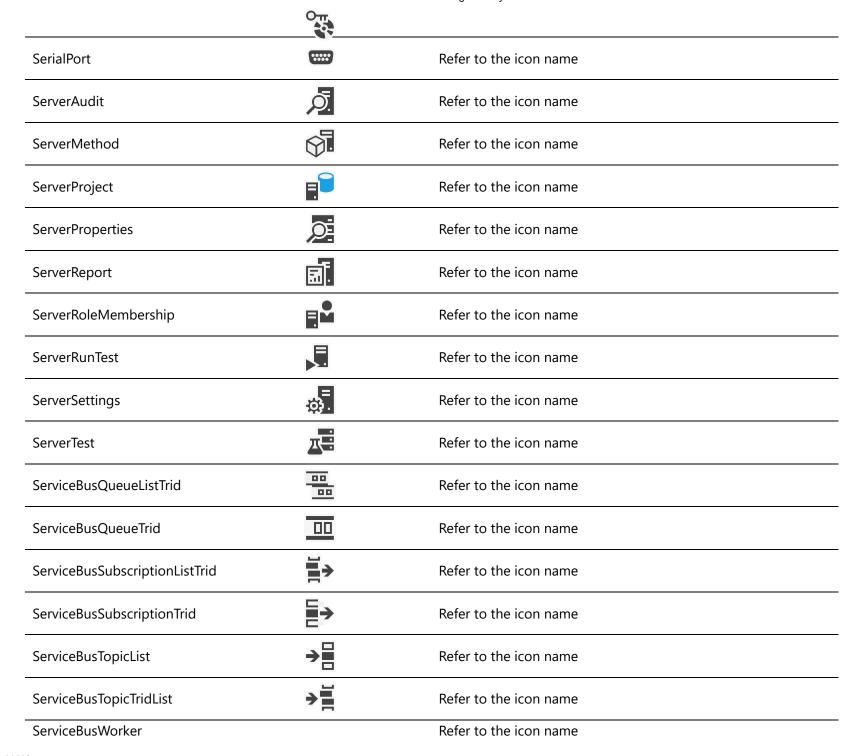

	<u> </u>	
ServiceController	· co	Refer to the icon name
ServiceOperation	Ş	Refer to the icon name
ServiceQueueDestination	→	Refer to the icon name
ServiceQueueSource	<u> </u>	Refer to the icon name
Services	Ξ	Refer to the icon name
SetField		Refer to the icon name
SetIterationCount	A	Refer to the icon name
SetLanguageTool	ST .	Refer to the icon name
SetListitem	7 _	Refer to the icon name
SetProactiveCaching	(2)	Refer to the icon name
Settings	*	Refer to the icon name
SettingsFile		Refer to the icon name
SettingsFileError	#⊗	Refer to the icon name
SettingsGroup	A	Refer to the icon name
SettingsGroupError	48	Refer to the icon name
Settings Group Warning	₽	Refer to the icon name
SettingsPanel		Refer to the icon name

	*	
SetWorkflowState	(\$)	Refer to the icon name
SFTPConnection	a P	Refer to the icon name
SFTPDestination	<u></u>	Refer to the icon name
SFTPSource	£	Refer to the icon name
Shader		Refer to the icon name
ShaderKill	×	Refer to the icon name
ShaderOthers	₹ •	Refer to the icon name
ShaderSpot		Refer to the icon name
ShaderUnit	\bigcirc	Refer to the icon name
ShapeArcPie	L	Refer to the icon name
ShapeArcRing	0	Refer to the icon name
Share	•	Refer to the icon name
ShareContract	7:-	Refer to the icon name
SharedDataSource	7	Refer to the icon name
SharedStepSet	44	Refer to the icon name
ShareLink	7	Refer to the icon name
ShareSnapshot		Refer to the icon name


http://localhost:3000/ 178/455

		•
	□	
ShelvePendingChanges		Refer to the icon name
Shortcut	7	Refer to the icon name
ShowAllAttributes	:	Refer to the icon name
ShowAllCode	I	Refer to the icon name
ShowAllConfigurations	44	Refer to the icon name
ShowAllFiles		Refer to the icon name
ShowAllThread	is:	Refer to the icon name
ShowAssignedConfiguration	عود	Refer to the icon name
ShowBuiltIn	사람	Refer to the icon name
ShowCallersGraph	←	Refer to the icon name
ShowCallGraph	-	Refer to the icon name
ShowDataPreview	Q	Refer to the icon name
ShowDetails	©	Refer to the icon name
ShowDetailsPane		Refer to the icon name
ShowDiagramPane	盎	Refer to the icon name
ShowEmptyCells	界	Refer to the icon name
ShowFieldList		Refer to the icon name

http://localhost:3000/ 179/455


	==		
ShowFullHistory		A clock with back arrow represents	
Showi dili listory	≡ノ	History. The extra lines represent more	
		rows of history entries.	
ShowGrid		Refer to the icon name	
ShowHideComparisonData		Refer to the icon name	
ShowHideDeletedItem	××	Refer to the icon name	
ShowHideSolutionFolder		Refer to the icon name	
ShowHotLines	% =	Refer to the icon name	
ShowLayout		Refer to the icon name	
ShowMemberType	ab	Refer to the icon name	
ShowMethodPane		Refer to the icon name	
Show Parant Nada Only	•	Matches the actual Git version control	
ShowParentNodeOnly	90	history tree graph. The filled nodes	
		represent top parent level.	
ShowReferencedElement	♣ II	Refer to the icon name	
ShowReflexiveView	*	Refer to the icon name	
ShowRelationshipLable	πO abc	Refer to the icon name	
ShowResultsPane	125	Refer to the icon name	
ShowSetPropertiesOnTop	•	Refer to the icon name	
ShowStartPage	©	Refer to the icon name	

ShowTemplateRegionLabel		Refer to the icon name
ShowTimeline	* ==>	Refer to the icon name
ShowTrimmedCallTree	딛	Refer to the icon name
ShowVisualAids		Refer to the icon name
ShutDown	①	Refer to the icon name
SidebySide	00	Compare version differences side by side.
Signal		Common icon for signal
Signature	×	Refer to the icon name
SigningKey	鬥	Refer to the icon name
Silverlight		Refer to the icon name
SilverlightDictionary		Refer to the icon name
SilverlightFolder		Refer to the icon name
SilverlightFolderOpen		Refer to the icon name
SilverlightLibrary		Refer to the icon name
SilverlightMobileProject		Refer to the icon name
SilverlightTemplate	8	Refer to the icon name
SilverlightUserControl		Refer to the icon name
SilverlightVideo		Refer to the icon name

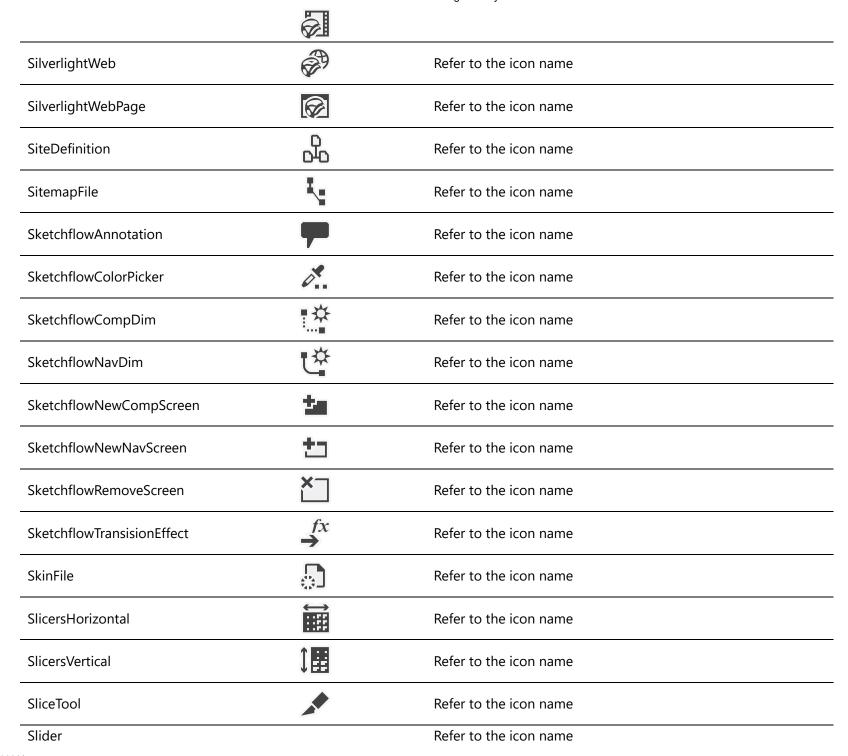

	-	
SmartTag		Refer to the icon name
SMTPConnection	 →	Refer to the icon name
SnapGridOff	•	Refer to the icon name
SnapGridOn	Φ Ι	Refer to the icon name
SnaptoGrid		Refer to the icon name
Snippet		Refer to the icon name
SnippetChecked	_	Refer to the icon name
Software Definition Model	맵	Refer to the icon name
SortAscending	A Z	Refer to the icon name
SortAscendingFilter	T ↑	Refer to the icon name
SortByColumn	E	Refer to the icon name
SortByType	↓ B	Refer to the icon name
SortClear	XA Z	Refer to the icon name
SortDescending	Z	Refer to the icon name
SortDescendingFilter	₹↓	Refer to the icon name
SortingGrouping		Refer to the icon name
SortNamespace		Refer to the icon name

http://localhost:3000/ 183/455

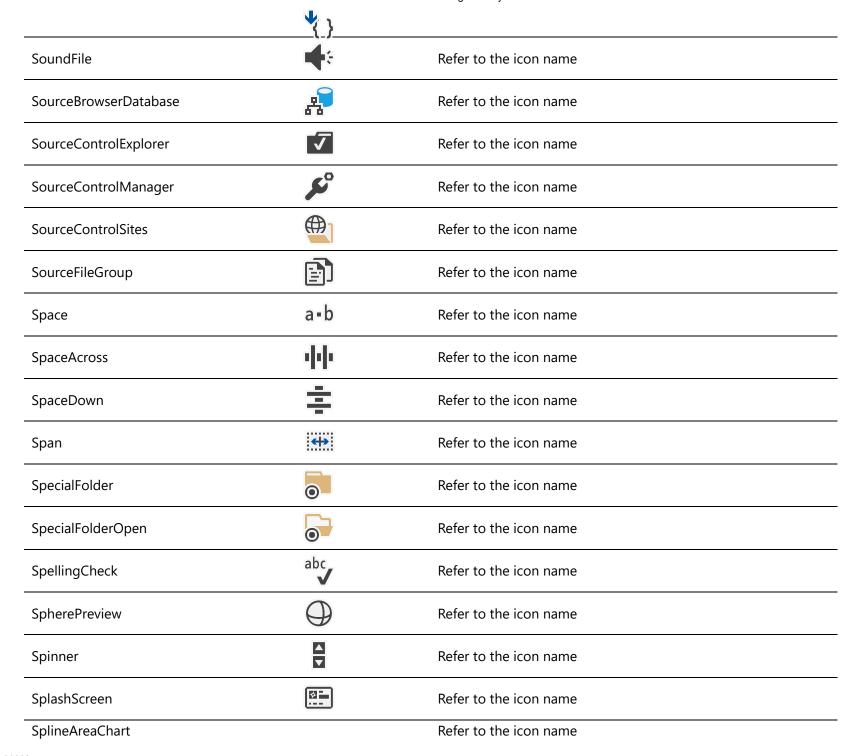



		3
SplineChart		Refer to the icon name
SplineRangeChart		Refer to the icon name
Split		Refer to the icon name
SplitApplication		Refer to the icon name
SplitButton	(I)	Refer to the icon name
SplitKeyValuePair	잍	Refer to the icon name
SplitPage		Refer to the icon name
SplitPageItem	≡≣	Refer to the icon name
SplitScreenHorizontal		Refer to the icon name
SplitScreenVertical		Refer to the icon name
SplitterControl	← →	Refer to the icon name
SplitTree	몺	Refer to the icon name
Spotlight	*	Refer to the icon name
Spy	\$	Refer to the icon name
SQL	SQL	Refer to the icon name
SQLCEDest	→	Refer to the icon name
SQLDatabase		Refer to the icon name


	SOL SOL	
SQLField		Refer to the icon name
SQLFile		Refer to the icon name
SQLLibrary		Refer to the icon name
SQLMobileConnection	1	Refer to the icon name
SQLQueryChecked	SQL	Refer to the icon name
SQLScript		Refer to the icon name
SQLSecurityPolicyTableSlider		For Security Policy project type. Design matches the icon used in SSMS.
SQLSecurityPolicyTableSliderOff		For Security Policy project type. Design matches the icon used in SSMS.
SQLSecurityPolicyTableSliderOn	YO	For Security Policy project type. Design matches the icon used in SSMS.
SQLServerObjectExplorer	듄	Refer to the icon name
SQLServerProject	E.	Refer to the icon name
SQLTrigger	4	Refer to the icon name
SquareCap	-	Refer to the icon name
SSlash	Z	Refer to the icon name
StackAreaDashLineChart	$ \overline{\mathbf{z}} $	Refer to the icon name
StackBarDashLineChart	國	Refer to the icon name
StackColumnDashLineChart		Refer to the icon name

http://localhost:3000/ 186/455

		3
	開	
StackDown	\$	Refer to the icon name
StackedAreaChart	$\overline{\sim}$	Refer to the icon name
StackedBarChart	≕ .	Refer to the icon name
StackedColumnChart	iil	Refer to the icon name
StackedLineChart	\approx	Refer to the icon name
StackLeft	4 III	Refer to the icon name
StackLineChart		Refer to the icon name
StackPanel	旦	Refer to the icon name
StackRight	III)	Refer to the icon name
StackUp		Refer to the icon name
StartGraphicDiagnostics	O	Refer to the icon name
StartHierarchy		Refer to the icon name
StartLog		Refer to the icon name
StartPause	 ◀	Refer to the icon name
StartPerformancePause	面	Refer to the icon name
StartPoint	-	Refer to the icon name
StartRemoteDebugger		Refer to the icon name

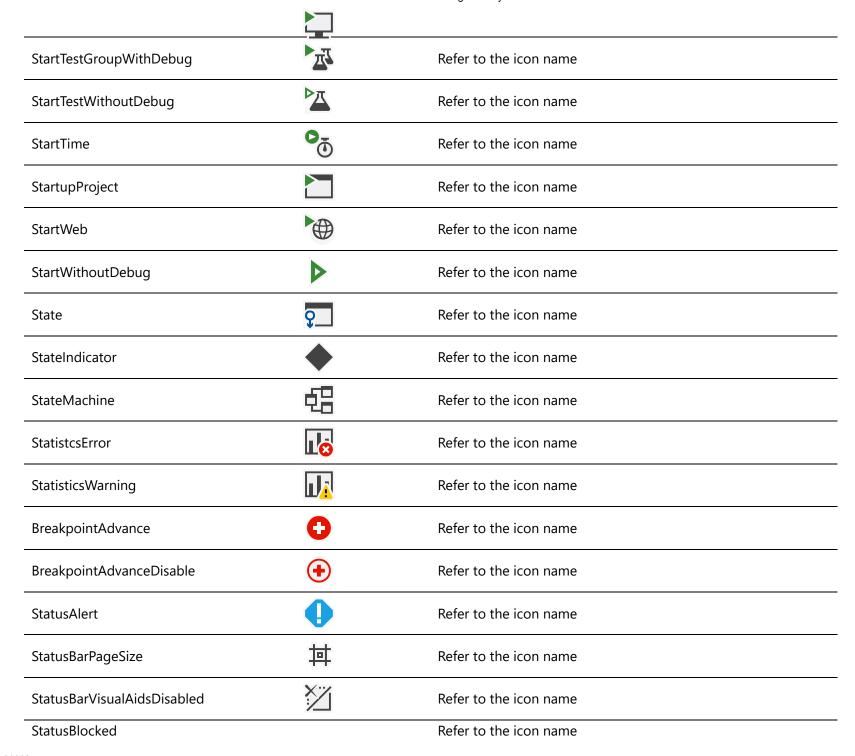

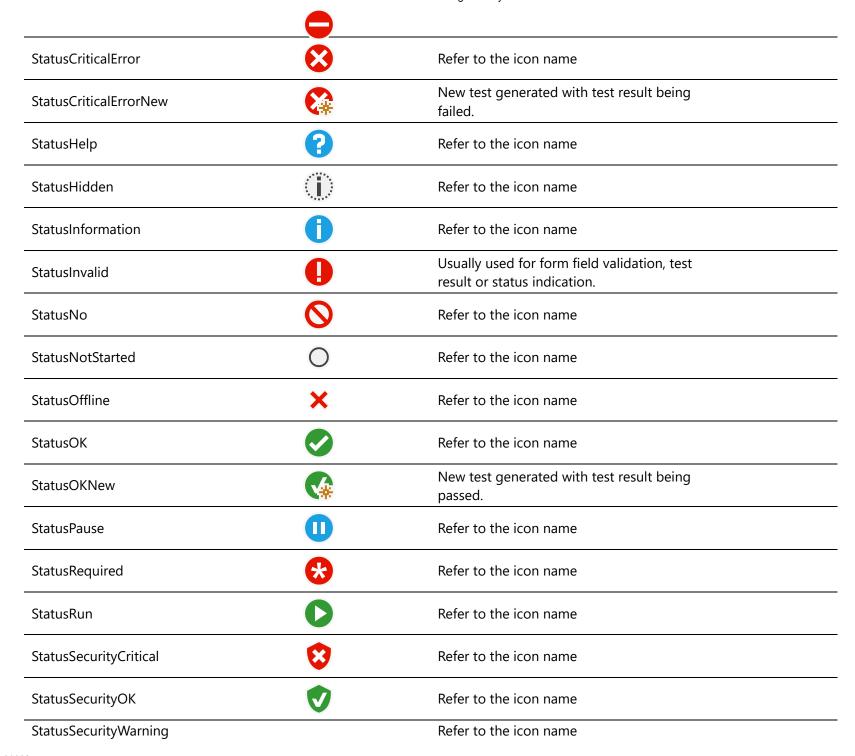

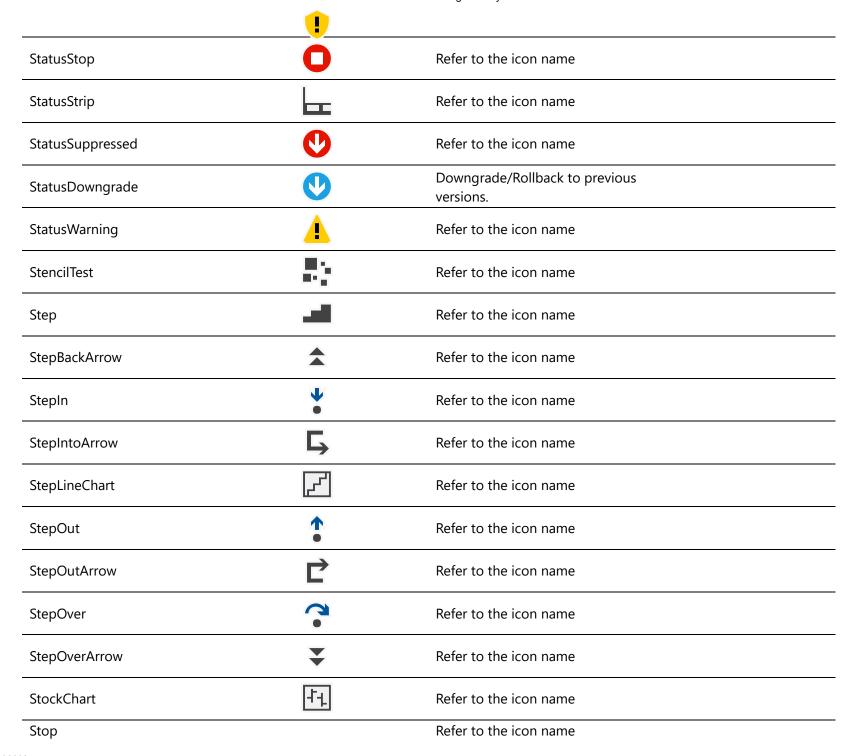

StopApplyCodeChange	<u>"</u>	Refer to the icon name
StopFilter	×	Refer to the icon name
StopLog	-	Refer to the icon name
StopPerformance	M	Stop diagnostics profiler.
StopPhoneLandscape	<u>-</u> 1	Refer to the icon name
StopQuery		Refer to the icon name
StopTime	O _ <u>(</u>	Refer to the icon name
StorageContainer	f	Refer to the icon name
StorageContainerGroup		Refer to the icon name
Storage Container Group Error		Refer to the icon name
StorageDriver	ণ্ট	Refer to the icon name
StorageDriverPackage	<u>2</u>	Refer to the icon name
Stored		Refer to the icon name
StoredPackage		Refer to the icon name
StoredProcedureChecked	鱼	Refer to the icon name
StoredProcedureCLR	æ	Refer to the icon name
StoredProcedureError		Refer to the icon name

http://localhost:3000/ 191/455

StoredProcedurefromCLRWarning		Refer to the icon name
StoredProcedureScript	<u>F</u> E	Refer to the icon name
StoredVM		Refer to the icon name
StoreVirtualMachine		Refer to the icon name
StrikeThrough	abc	Refer to the icon name
String	abc	Refer to the icon name
StringData	ABC	Refer to the icon name
Stroke		Refer to the icon name
StrokeOpacity	111	Refer to the icon name
StrongHierarchy		Refer to the icon name
StrongNameKey	Ç=	Refer to the icon name
Structure		Refer to the icon name
StructureFriend	7,	Refer to the icon name
StructurePrivate		Refer to the icon name
StructureProtect	*	Refer to the icon name
StructureSealed	• 0	Refer to the icon name
StructureShortcut		Refer to the icon name

http://localhost:3000/ 192/455

	7	
StyleBlock	A **	Refer to the icon name
StylePanelDocument		Refer to the icon name
StyleRule	1	Refer to the icon name
StyleSheet	A	Refer to the icon name
StyleSheetFileGroup		Refer to the icon name
SubReport		Refer to the icon name
SubReportParamater		Refer to the icon name
Subscript	X_2	Refer to the icon name
Substitution	ि	Refer to the icon name
Subtract	-	Refer to the icon name
SubtractBack		Refer to the icon name
SubtractFront	<u>-</u>	Refer to the icon name
SubtractMember	0	Refer to the icon name
SubtractMemberFormula	fx	Refer to the icon name
Summary) —	Refer to the icon name
SummaryView		Refer to the icon name
Superscript		Refer to the icon name

http://localhost:3000/ 193/455

		3 ,
	\mathbf{X}^2	
SuppressedRule	⊕ ^Q	Refer to the icon name
SwitchSourceOrTarget	4	Refer to the icon name
SwitchToDataView		Refer to the icon name
SwitchToDesignMode		Refer to the icon name
SwitchToPreview		Refer to the icon name
SymlinkFile		Refer to the icon name
SymmetricKey		Refer to the icon name
SymmetricKeyError	(40)	Refer to the icon name
SymmetricKeyWarning		Refer to the icon name
SyncArrow	\$	Refer to the icon name
SyncContent		Refer to the icon name
Synchronize	(2)	Refer to the icon name
SynchronizeDatabase	\(\frac{1}{2}\)	Refer to the icon name
SynchronousMessage	~ -□	Refer to the icon name
SyncMissingMember	(2)	Sync and add missing team members.
SyncServer	\$:	Refer to the icon name
Synonym		Refer to the icon name

http://localhost:3000/ 194/455


		č ,
SynonymError	 □ ⊗	Refer to the icon name
SynonymWarning		Refer to the icon name
SystemDiagram	B	Refer to the icon name
SystemInfo		Refer to the icon name
SystemResources		Refer to the icon name
Tab	— —	Refer to the icon name
Table		Refer to the icon name
TableAdapter		Refer to the icon name
TableAlignBottom		Refer to the icon name
TableAlignMiddle	囯	Refer to the icon name
TableAlignTop	囯	Refer to the icon name
TableBottomBorder		Refer to the icon name
TableCell	:	Refer to the icon name
AzureQueue	Ш	Azure Queue resource type.
TableColumnHeading	=	Refer to the icon name
TableError	≅	Refer to the icon name
TableEvenColumns		Refer to the icon name

http://localhost:3000/ 195/455

	·	Stadio ilitago Elsiary 2011
TableEvenRows		Refer to the icon name
TableFillDown	U	Refer to the icon name
TableFillLeft	←	Refer to the icon name
TableFillRight	→	Refer to the icon name
TableFunction	fex-	Refer to the icon name
TableFunctionError	Ĵ [™] ⊗	Refer to the icon name
TableFunctionWarning	f .	Refer to the icon name
TableGroup		Refer to the icon name
TableGroupError	**	Refer to the icon name
TableHeader		Refer to the icon name
TableHorizongtalLine	<u>A</u> =	Refer to the icon name
TableInsideBorder		Refer to the icon name
TableInsideHorizontalBorder		Refer to the icon name
TableInsideVerticalBorder		Refer to the icon name
TableKeyColumn	<u> </u>	Refer to the icon name
TableLayoutPanel		Refer to the icon name
TableLeftBorder		Refer to the icon name

http://localhost:3000/ 196/455

		alo mago Library 2017
TableMissing		Refer to the icon name
TableNoBorder		Refer to the icon name
TableOK		Refer to the icon name
TableRightBorder		Refer to the icon name
TableRowHeading	**	Refer to the icon name
TableScript		Refer to the icon name
Tablet	_	Refer to the icon name
TableTopBorder		Refer to the icon name
TabletSettings	₩	Refer to the icon name
TabletWarning		Refer to the icon name
TableViewKey	?==	Refer to the icon name
TableViewNameOnly		Refer to the icon name
TableWarning		Refer to the icon name
TableWizard	* =	Refer to the icon name
Tag		Used to attach tags to item for description and searching.
TagSnippet	[] []	Refer to the icon name
TakeSnapshot		Refer to the icon name

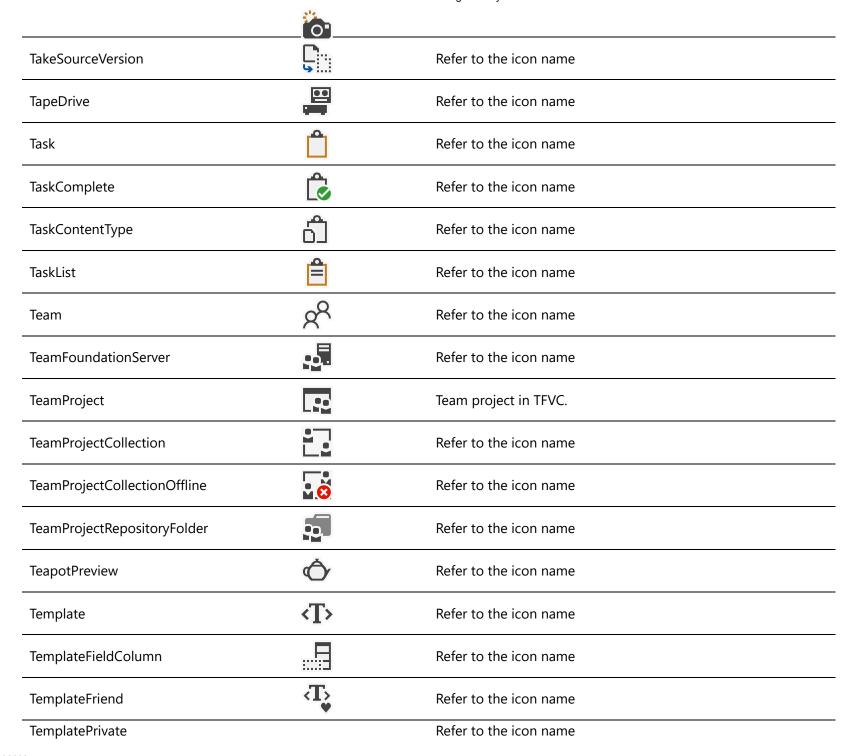

		· ·
	⟨T _≥	
TemplateProtect	⟨T⟩ *	Refer to the icon name
TemplateSealed	⟨T⟩	Refer to the icon name
TemplateShortcut	⟨ T ⟩	Refer to the icon name
TermExtraction	E	Refer to the icon name
TerminateProcess		Refer to the icon name
Test		Refer to the icon name
TestCancel	Z _×	Refer to the icon name
TestConfiguration	Υ <u>π</u>	Refer to the icon name
TestConfigVariable	Z _◆	Refer to the icon name
TestController		Refer to the icon name
TestGroup	五	Refer to the icon name
TestJob		Refer to the icon name
TestManager	©.	Refer to the icon name
TestNotInList	Z	Refer to the icon name
TestPass	<u></u>	Refer to the icon name
TestPlan		Refer to the icon name
TestPlanProperty		Refer to the icon name

http://localhost:3000/ 199/455

		3
TestPlans		Test plans folder.
TestProject	风	Refer to the icon name
TestResultDetail	<u>G</u>	Refer to the icon name
TestResultFile	∑	Refer to the icon name
TestRun	<u>_</u>	Refer to the icon name
TestRunConfigurationFile	•	Refer to the icon name
TestRunner		Refer to the icon name
TestSettings	Z _G	Refer to the icon name
TestSuiteDynamic		Refer to the icon name
TestSuiteRequirement	∑	Refer to the icon name
TestSuiteStatic	区	Refer to the icon name
Text		Refer to the icon name
TextArea	ab♣	Refer to the icon name
TextBlock	Т	Refer to the icon name
TextBox	abl	Refer to the icon name
TextBulletPosition	• -	Refer to the icon name
TextCenter		Refer to the icon name


	<u> </u>	
TextCenterInFormHorizontal	÷	Refer to the icon name
TextContentControl	a	Refer to the icon name
TextElement	Т	Refer to the icon name
TextFile		Refer to the icon name
TextImage		Refer to the icon name
TextIndent	→ =	Refer to the icon name
TextJustify		Refer to the icon name
TextLeftJustify	E	Refer to the icon name
TextLineHeight	1	Refer to the icon name
TextOutdent	≛ €	Refer to the icon name
TextRightJustify	Ē	Refer to the icon name
TextSpaceAfter	Ē	Refer to the icon name
TextSpaceBefore	}	Refer to the icon name
TexturePicker	KG*	Refer to the icon name
TFSServer	.	Refer to the icon name
TFVCRepository	œ	Repository for TFVC centralized version control
ThirdParty		Refer to the icon name

	000	
Thread	72.	Refer to the icon name
ThreadStop	72	Refer to the icon name
ThreeLineBreakChart	" ""	Refer to the icon name
ThresholdRule	AR	Refer to the icon name
Throw	==	Refer to the icon name
TIF	&	Refer to the icon name
Time	(L)	Refer to the icon name
Timeline	<u> </u>	Refer to the icon name
TimelineMark	\limits	Event marks on timeline graph generated by diagnostics tool.
TimelineState		Refer to the icon name
Timeout	₩	Refer to the icon name
TimePicker	Q.	Refer to the icon name
TimePickerList		Refer to the icon name
TimePickerScroll	C _M	Refer to the icon name
Timer	Ф	Refer to the icon name
TitleTag		Refer to the icon name
Toggle		Toggle on/off.

202/455


	€∑	
Toggle All Breakpoints		Refer to the icon name
ToggleAreaBox		Refer to the icon name
ToggleButton		Refer to the icon name
ToggleGuides		Refer to the icon name
ToggleOfficeKeyboardScheme		Refer to the icon name
TogglePivot	(Refer to the icon name
TogglePivotFreeForm	w D	Refer to the icon name
ToggleStackView	T1	Refer to the icon name
ToggleWireframe	\otimes	Refer to the icon name
ToggleWorld	<u>↑</u>	Refer to the icon name
ToggleZoom	⊕¶	Refer to the icon name
ToolBar	וים:	Refer to the icon name
ToolBarPanelElement	:07	Refer to the icon name
ToolBarTrayElement	歐	Refer to the icon name
Toolbox	=	Refer to the icon name
ToolBSpline	7	Refer to the icon name
ToolstripAlignment		Refer to the icon name

	•••	
ToolstripContainer		Refer to the icon name
ToolstripPanelBottom		Refer to the icon name
ToolstripPanelLeft		Refer to the icon name
ToolstripPanelRight		Refer to the icon name
ToolstripPanelTop		Refer to the icon name
ToolTip		Refer to the icon name
TopicDestination	→≒	Refer to the icon name
TopicSource	≒→	Refer to the icon name
TopLeftOf2Rows2Columns		Refer to the icon name
TopLeftOf2RowsTopSplit		Refer to the icon name
TopOf2ColumnsLeftSplit	-1	Refer to the icon name
TopOf2Rows		Refer to the icon name
TopOf3Rows		Refer to the icon name
TopOf4Rows		Refer to the icon name
TopRightOf2Rows2Columns		Refer to the icon name
TopRightOf2RowsTopSplit		Refer to the icon name
TopRowOf2RowsBottomSplit		Refer to the icon name

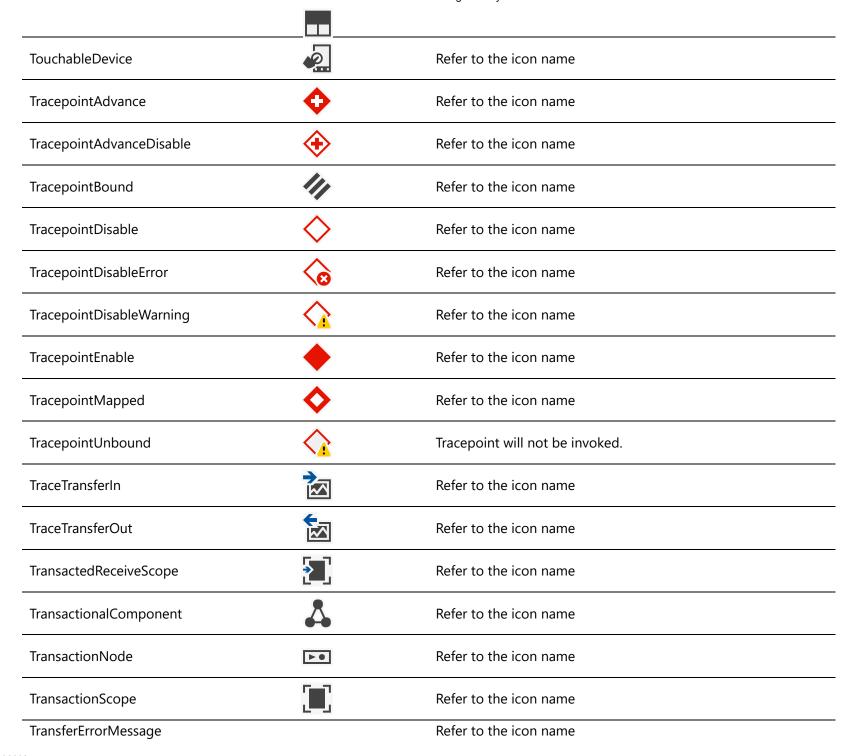

TransferJob	₹E	Refer to the icon name
TransferLogin	P fi	Refer to the icon name
TransferSQLServerObject	5	Refer to the icon name
TransferStoredProcedure	P	Refer to the icon name
Transform		Refer to the icon name
TransformListItem	€ □	Refer to the icon name
TransformPositionCursor	-1-	Refer to the icon name
TransformRelative	d d	Refer to the icon name
TransformShape	Ð	Refer to the icon name
TransitioningContentControl		Refer to the icon name
TranslateDocument	a 🕏	Refer to the icon name
TranslationsView		Refer to the icon name
TransparentBackground		Refer to the icon name
Treemap	-	Refer to the icon name
TreeView	;=	Refer to the icon name
Hourglass	Ξ	Waiting, loading, process running in background.
Triangle		Refer to the icon name

TriggerAction		Refer to the icon name
TriggerActionListActive		Refer to the icon name
TriggerActionListInactive	-	Refer to the icon name
TriggerDisabled		Refer to the icon name
TriggeredFolder	5	Refer to the icon name
TriggerError	1	Refer to the icon name
TriggersActiveWhenOn	0	Refer to the icon name
TriggerScript	Ţ	Refer to the icon name
TriggerWarning	5	Refer to the icon name
TryCatch		Refer to the icon name
TS	TS	Refer to the icon name
TSApplication		Refer to the icon name
TSAzureApplication	6	Refer to the icon name
TSConsole	C:\	Refer to the icon name
TSSourceFile		Refer to the icon name
TSWeb		Refer to the icon name
TSWorker		Refer to the icon name

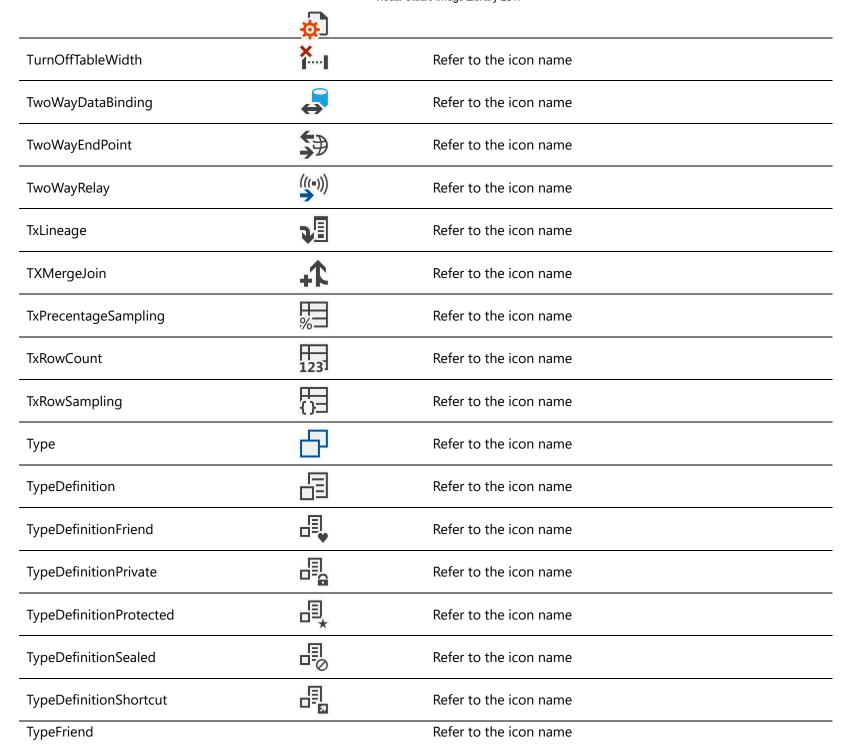

		· · ·
	₽,	
TypePrivate	Đ _a	Refer to the icon name
TypeProtected	₽,	Refer to the icon name
TypeSealed	L o	Refer to the icon name
TypeShortcut		Refer to the icon name
UI	□≡	Refer to the icon name
UIAboutBox	V. 1	Refer to the icon name
UIEditor	₽	Refer to the icon name
UIExplorer		Refer to the icon name
UMLModel	PG 97	Refer to the icon name
UMLModelFile		Refer to the icon name
UnblockingStack	5	Refer to the icon name
UnComment	* >	Refer to the icon name
UncommentCode	೨ <u>≡</u>	Refer to the icon name
Underline	<u>U</u>	Refer to the icon name
Undo	り	Refer to the icon name
UndoCheckboxList	2	Refer to the icon name
UndoCheckOutItem		Refer to the icon name

	クヨ	
Undock		Refer to the icon name
UnfreezeColumn	×	Refer to the icon name
Ungroup	喧	Refer to the icon name
UngroupClause	↑ □	Refer to the icon name
UniformGridElement		Refer to the icon name
Uninstall	\$	Refer to the icon name
UninstallFromHardDrive		Refer to the icon name
UninstallFromSource		Refer to the icon name
Union	₽	Refer to the icon name
UnionFriend	₽,	Refer to the icon name
UnionPrivate		Refer to the icon name
UnionProtect	₽ *	Refer to the icon name
UnionSealed	₽ ⊘	Refer to the icon name
UnionShortcut		Refer to the icon name
UniqueKey	8	Refer to the icon name
UniqueKeyError	å ⊗	Refer to the icon name
UniqueKeyWarning		Refer to the icon name

http://localhost:3000/ 210/455



UnitePath	F	Refer to the icon name
UnitsofMeasure	[] []	Refer to the icon name
UniversalPlatform		Refer to the icon name
UnknownProject	2	Refer to the icon name
Unlink	CD	Refer to the icon name
Unlock	f	Refer to the icon name
UnnestRelatedFiles	D.;	Refer to the icon name
Unplugged	#:IF	Refer to the icon name
UnsavedLink	۔	Refer to the icon name
UnshelvePendingChanges		Refer to the icon name
Unsubscribe	RI _×	Refer to the icon name
UnsyncedCommits	↑ ↓	Refer to the icon name
UpdateAnimation	→	Refer to the icon name
UpdateDatabase	C)	Refer to the icon name
UpdateDatabaseComplete	Ç.	Refer to the icon name
Update Database Fail	♥ <mark>®</mark>	Refer to the icon name
UpdatedScript		Refer to the icon name

http://localhost:3000/ 211/455

	<u></u>	
UpdateLinkedTable	<u> </u>	Refer to the icon name
UpdateListItem		Refer to the icon name
UpdatePanel		Refer to the icon name
Upload	↑	Refer to the icon name
UploadDatabase	1	Refer to the icon name
UploadFile	ightharpoonup	Refer to the icon name
UploadPackage	偣	Used in Nuget package manager feature to indicate upgrade the package from packages.config to project.json
UploadParameter	a	Refer to the icon name
URLInputBox		Refer to the icon name
UsageBasedOptimization		Refer to the icon name
USB	•	Refer to the icon name
UseCase		Refer to the icon name
UseCaseDiagram	ŵ	Refer to the icon name
User	2	Refer to the icon name
UserAddedItemTemplate		Refer to the icon name
UserAddedProjectTemplate		Refer to the icon name
·		

http://localhost:3000/ 212/455

UserApplication	5	Refer to the icon name
UserBuild		Refer to the icon name
UserCode	<u>=</u>	Refer to the icon name
UserControl		Refer to the icon name
UserDataType	<u>_</u> Q	Refer to the icon name
UserDefinedDataType		Refer to the icon name
UserDefinedDataTypeError	oi×	Refer to the icon name
User Defined Data Type Warning	oi ™	Refer to the icon name
UserDefinedTableType		Refer to the icon name
UserDefinedTypeError	₽ ⊗	Refer to the icon name
UserDefinedTypeWarning		Refer to the icon name
UserError	×	Refer to the icon name
UserFunction	fx	Refer to the icon name
UserInformation		Refer to the icon name
UserProfile		Default user avatar.
UserTask		Refer to the icon name
UserWarning	MA.	Refer to the icon name
UserWizard		Refer to the icon name

	<u> </u>	
Utility	¥	Refer to the icon name
ValidateAggregation	(•)∑	Refer to the icon name
ValidateDocument	1	Refer to the icon name
ValidatedScript		Refer to the icon name
ValidatedScriptError	₽.	Refer to the icon name
ValidatedScriptExcluded		Refer to the icon name
ValidatedScriptWarning	₽	Refer to the icon name
ValidateModel	√ 13	Refer to the icon name
ValidateShelveset	√ %	Refer to the icon name
ValidateTestStep	4	Refer to the icon name
ValidateWarning	1	Refer to the icon name
ValidationRule	R	Refer to the icon name
ValidationSummary	P	Refer to the icon name
ValueType		Refer to the icon name
ValueTypeFriend	- 7,	Refer to the icon name
ValueTypePrivate	-	Refer to the icon name
ValueTypeProtect		Refer to the icon name

http://localhost:3000/ 214/455

	*	
ValueTypeSealed		Refer to the icon name
ValueTypeShortcut	7	Refer to the icon name
VariableExpression	G fx	Refer to the icon name
VariableProperty	уfx	Refer to the icon name
VB	VB	Refer to the icon name
VBAApplication	\bigcirc	Refer to the icon name
VBApplication		Refer to the icon name
VBAssemblyInfoFile	iì	Refer to the icon name
VBBDCModelTemplate		Refer to the icon name
VBBlankApplication		Refer to the icon name
VBBlankFile	\mathbf{S}	Refer to the icon name
VBBlankPhone		Refer to the icon name
VBBlankWeb	(#)	Refer to the icon name
VBClassCollection	¢.	Refer to the icon name
VBClassFile	4	Refer to the icon name
VBClassLibrary		Refer to the icon name
VBCodeTest		Refer to the icon name

http://localhost:3000/ 215/455

	T-	
VBColumn		Refer to the icon name
VBConsole	C:X	Refer to the icon name
VBConsoleTest	C:\	Refer to the icon name
VBContentType	語	Refer to the icon name
VBDeploymentModule		Refer to the icon name
VBDeviceTest	<u>⊼</u>	Refer to the icon name
VBDynamicWeb		Refer to the icon name
VBEventReceiver	#	Refer to the icon name
VBExtension	蝉	Refer to the icon name
VBFile		Refer to the icon name
VBFixedLayoutApplication		Refer to the icon name
VBGridApplication		Refer to the icon name
VBHubApplication		Refer to the icon name
VBInterfaceCollection	•••	Refer to the icon name
VBInterOp	71	Refer to the icon name
VBLibrary		Refer to the icon name
VBLightSwitch		Refer to the icon name

http://localhost:3000/ 216/455

VBLightSwitchLibrary		Refer to the icon name
VBListDefinition	=	Refer to the icon name
VBMenuItemCustomAction	F	Refer to the icon name
VBMobileWeb		Refer to the icon name
VBNavigationApp		Refer to the icon name
VBPackage	苗	Refer to the icon name
VBPhone		Refer to the icon name
VBPhoneApplication		Refer to the icon name
VBPhoneHub		Refer to the icon name
VBPhoneLibrary		Refer to the icon name
VBPhonePivot	ab	Refer to the icon name
VBPhoneTest	<u></u>	Refer to the icon name
VBPhoneWeb		Refer to the icon name
VBPowerPack		Refer to the icon name
VBRazorFile	@	Refer to the icon name
VBReport	<u>ā</u>	Refer to the icon name
VBRibbonCustomAction		Refer to the icon name

	<u>F</u>	
VBSearch	P	Refer to the icon name
VBServiceBusWorker	<u></u>	Refer to the icon name
VBShell	12	Refer to the icon name
VBSilverlight	8	Refer to the icon name
VBSilverlightLibrary		Refer to the icon name
VBSilverlightWeb		Refer to the icon name
VBSiteDefinition	90	Refer to the icon name
VBSourceFile		Refer to the icon name
VBSplitApplication		Refer to the icon name
VBSQLLibrary		Refer to the icon name
VBTablet		Refer to the icon name
VBTest		Refer to the icon name
VBTestLibrary		Refer to the icon name
VBTestProject		Refer to the icon name
VBWCF	©	Refer to the icon name
VBWebAddNewBrowser		Refer to the icon name
VBWebApplication		Refer to the icon name

http://localhost:3000/ 218/455

VBWebLibrary		Refer to the icon name
VBWebPart		Refer to the icon name
VBWebService	≡ ⊕	Refer to the icon name
VBWebsiteTemplate		Refer to the icon name
VBWFProject	Ōı	Refer to the icon name
VBWindowsLibrary		Refer to the icon name
VBWindowsService	3	Refer to the icon name
VBWorkerTemplateFile	\$	Refer to the icon name
VBWorkflow	Q	Refer to the icon name
VBWorkflowActivity	Q.	Refer to the icon name
VBWorkflowAssociationForm	t	Refer to the icon name
VBWorkflowDiagram	品	Refer to the icon name
VBWorkflowInitiationForm	E	Refer to the icon name
VBWorkflowManagerActivity		Refer to the icon name
VBWPFApplication		Refer to the icon name
VBWPFLibrary	* • • • • • • • • • • • • • • • • • • •	Refer to the icon name
VBWPFUserControl		Refer to the icon name

http://localhost:3000/ 219/455

VBWPFWeb		Refer to the icon name
Verbose	V	Refer to the icon name
Version	D-	Refer to the icon name
VersionInformation	1.0	Refer to the icon name
VerticalScrollBarControl	<u> </u>	Refer to the icon name
VideoCamera	•••	Refer to the icon name
VideoController	F	Refer to the icon name
VideoRecording	0_	Refer to the icon name
View	X	Refer to the icon name
ViewBack	♦	Refer to the icon name
ViewBottom	\$	Refer to the icon name
ViewBox	I	Refer to the icon name
ViewDefinition	Ī	Refer to the icon name
ViewDock		Refer to the icon name
ViewDownBySchema	Y L	Refer to the icon name
ViewError	∑	Refer to the icon name
ViewFront		Refer to the icon name



ViewFull		Refer to the icon name
ViewInBrowser		Refer to the icon name
ViewLandscape		Refer to the icon name
ViewLeft	•	Refer to the icon name
ViewMonocle	•	Refer to the icon name
ViewPortrait		Refer to the icon name
ViewRemoteSite		Refer to the icon name
ViewRemove	×	Refer to the icon name
ViewRight	&	Refer to the icon name
ViewTop	•	Refer to the icon name
ViewWarning	Z <mark>i</mark>	Refer to the icon name
Virtual		Nonsubstantive (hidden or template).
VirtualMachine	I 📳 L	Refer to the icon name
VirtualMachineError	8	Refer to the icon name
VirtualMachineGroup	息	Refer to the icon name
VirtualMachineGroupError	₽	Refer to the icon name
VirtualMachineOK		Refer to the icon name

		3 , ,
VirtualMachineRefresh	E	Refer to the icon name
VirtualMachineStop		Refer to the icon name
Visible	③	Refer to the icon name
VisibleBorders		Refer to the icon name
VisualTotals	- ==	Refer to the icon name
VocabularyFile	ab	Refer to the icon name
Volume	•	Refer to the icon name
VSContentInstaller		Refer to the icon name
VSDatasetInternalInfoFile	1	Refer to the icon name
VSNETWebServiceDynamicDiscovery		Refer to the icon name
VSShell	12	Refer to the icon name
VSTAAbout	同	Refer to the icon name
WaitForCustomEvent	" 4	Refer to the icon name
WaitForFieldChange	<u></u>	Refer to the icon name
WaitForItemEvent	<u>"</u>	Refer to the icon name
WarningRule	∆ ^Q	Refer to the icon name
Watch		Refer to the icon name

	60	
WCF	⊙ }	Refer to the icon name
WCFDataService		Refer to the icon name
WeakHierarchy		Refer to the icon name
Web		Refer to the icon name
WebAdmin		Refer to the icon name
WebAPI		Refer to the icon name
WebApplication		Refer to the icon name
WebConfiguration	4	Refer to the icon name
WebConsole		Refer to the icon name
WebControlLibrary		Refer to the icon name
WebCustomControl	.	Refer to the icon name
WebCustomControlASCX		Refer to the icon name
WebDestination	\$	Refer to the icon name
WebFile		Refer to the icon name
WebFileInvalid		Refer to the icon name
WebLog		Refer to the icon name
WebMethodAction		Refer to the icon name

http://localhost:3000/ 223/455


		ů ,
	\$\P\	
WebPart		Refer to the icon name
WebPartManager	بخ	Refer to the icon name
WebPartPageMenu		Refer to the icon name
WebPartZone		Refer to the icon name
WebPhone		Refer to the icon name
WebReferenceFolder		Refer to the icon name
WebScript	T	Refer to the icon name
WebServer	.	Refer to the icon name
WebService	≡₩	Refer to the icon name
WebSetupProject		Refer to the icon name
WebSubfolder		Refer to the icon name
WebTest		Refer to the icon name
WebTestPlugin	<u> </u>	Refer to the icon name
WebUserControl		Refer to the icon name
WebWarning		Refer to the icon name
WeightMember	%	Refer to the icon name
WeightMemberFormula		Refer to the icon name

		•
	% 3	
WelcomeOnline		Refer to the icon name
WelcomeOnlineTutorial		Refer to the icon name
WelcomeSampleFolder		Refer to the icon name
WelcomeUserGuide	?	Refer to the icon name
WF	ιδι	Refer to the icon name
WFC		Refer to the icon name
WFService	<u> </u>	Refer to the icon name
While		Refer to the icon name
Win32Project	==	Refer to the icon name
WindowScreenshot		Refer to the icon name
WindowsForm	==	Refer to the icon name
WindowsFormLibrary		Refer to the icon name
WindowsService	3	Refer to the icon name
WindowsServiceStop	= 6	Refer to the icon name
WindowsServiceWarning		Refer to the icon name
WinformToolboxControl	ŢÜ.	Refer to the icon name
WireframeView		Refer to the icon name

http://localhost:3000/ 225/455

	Θ_{λ}	
Wizard	++	Refer to the icon name
WMIConnection	*	Refer to the icon name
WordWrap	ab c	Refer to the icon name
WorkAsSomeoneElse	O.	Refer to the icon name
WorkerServiceFile	=	Refer to the icon name
Workflow	Ů.	Refer to the icon name
WorkflowActivity	Ċ.	Refer to the icon name
WorkflowAssociationForm	5	Refer to the icon name
WorkflowInitiationForm	2	Refer to the icon name
WorkflowInterop	' &	Refer to the icon name
WorkflowStartAssociation	Q 5	Refer to the icon name
WorkItem	Ž	Refer to the icon name
WorkItemGroup	ĺĈ	Refer to the icon name
WorkItemQuery	â	Refer to the icon name
WorkItemTreeView	辐	Refer to the icon name
WorldLocal	Ω	Refer to the icon name
WPFApplication		Refer to the icon name

	(<u> </u>	
WPFCustomControl	<->>	Refer to the icon name
WPFDesigner		Refer to the icon name
WPFFlowDocument		Refer to the icon name
WPFLibrary		Refer to the icon name
WPFPage		Refer to the icon name
WPFPageFunction	fx	Refer to the icon name
WPFResourceDictionary		Refer to the icon name
WPFToolboxControl		Refer to the icon name
WPFUserControl		Refer to the icon name
WPFWeb		Refer to the icon name
WrapPanel	5	Refer to the icon name
Writeable	_	Refer to the icon name
WriteBackPartition	3	Refer to the icon name
WriteConsole		Refer to the icon name
WriteToDatabase	9	Refer to the icon name
WriteToHistory		Refer to the icon name
WWAProject		Refer to the icon name

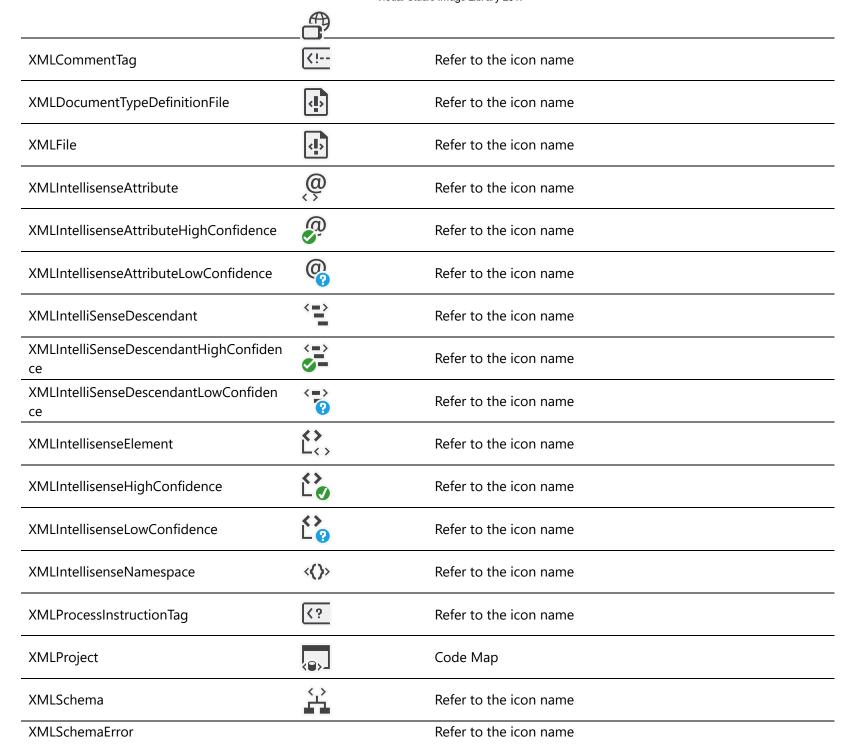

XMLSchemaWarning		Refer to the icon name
XMLTagCData	1>	Refer to the icon name
XMLTransformation		Refer to the icon name
XPath	晶	Refer to the icon name
XrayView	O	Refer to the icon name
XSLTTemplate		Refer to the icon name
XSLTTransformFile	7 基 三	Refer to the icon name
xWorldFile	Ð	Refer to the icon name
ZipFile		Refer to the icon name
Zoom	Q	Refer to the icon name
ZoomControl	R	Refer to the icon name
ZoomControlLock		Refer to the icon name
Zoomln	⊕	Refer to the icon name
ZoomOriginalSize	100	Refer to the icon name
ZoomOut	Q	Refer to the icon name
ZoomToFit	ı <u>⊕</u> į	Refer to the icon name
ZoomToWidth		Refer to the icon name

http://localhost:3000/ 229/455

	IQI	
GaugeMeter		Agaugemeter on cardash board.
PackageReferences	苗-■	Parent node of dependency packages.
WebFolder		wwwroot folder for a web app project.
WebFolderOpen		wwwroot folder for a web app project.
UserVoice	27	User suggestion.
CopyLongTextToClipboard	Ê	Copy a complex URL that you cannot do by selecting and using Ctrl+C for a regular copy.
DataCollection	ı ⊞ i	Collect detailed data while CPU profiling.
LastHistoryCommand	存	Retrieve history command, same as pressing keyboard up.
Remote	<u> </u>	Remote.
AzureActiveDirectory		Azure Active Directory resource type.
Commit	¢	Git commit.
StatusUpdate	•	Update to new version.
ManageDuplicates	2 -0	Manage duplicated work items.
RestoreFromRecycleBin	7_	Restore a deleted work item from recycle bin.
BreakConnection	₽ ₽	Break database connection from server.
ChangeConnection	- ₫	Change database connection.

http://localhost:3000/ 230/455

ExecutionPlan	Δa	Database command execution plan.
Hub	8:	Used for TFVC distributed version control.
GitPullRequest	in	Pull Request in version control.
Azure Diagnostics Log	-√-	Azure Diagnostics Log resource type.
Azure Document DBD at a base		Azure DocumentDB Database resource type.
AzureDocumentDBFile	0	Azure DocumentDB File resource type.
AzureDocumentDBFileCollection	a	Azure DocumentDB Collection resource type.
CodeGrammarPackage	1 1	VSIX extension for supporting TextMate Grammar files. Language grammars are used to assign names to document elements such as keywords, comments, strings or similar.
CSInteractiveWindow	圕	C# Interactive Window Interactive can be used to write code at the console or in a window in Visual Studio.
VBInteractiveWindow	=	VB Interactive Window Interactive can be used to write code at the console or in a window in Visual Studio.
JavaFile	D	Java file (.java) association.
R	R	R language.
RInteractiveWindow	===	R Language interactive window menu item.
RFile		R language (*.r) file association.
AzureStorageAccount		Azure Storage Account resource type.
AddFilter		Add filter.

	**		
SearchApplicationInsights	P	Add filter.	
TemporalTable	<u>©</u>	System-versioned table.	
DialogState		Dialog state in Cortana dialog flowchart.	
DomainModel	ø	Domain Model in Cortana dialog flowchart.	
Example	E	Example in Cortana dialog flowchart.	
AddIntentTask	ţ	Tools for creating Cortana dialog apps.	
AutoFillTemplate	=	Auto fill form fields.	
CheckboxCheckAll	口	Check all checkboxes.	
CheckboxClearAll	×	Clear all checked checkboxes.	
DisableLog	X =	Disable diagnostics logging.	
EditTableRow	\(\)	Edit a row in data table.	
EnableLog	7 -	Enable diagnostics logging.	
ExportTableToFile	□	Export data from table to a file.	
FeedbackResponseState	e	Tools for creating Cortana dialog apps.	
FileToTable	<u> </u>	Import data from file to table.	
IntentTask	77	Tools for creating Cortana dialog apps.	
JSONFile		*.json file.	

http://localhost:3000/ 232/455

<u> </u>	Tools for creating Cortana dialog apps.
亞	Three screens to indicate multi-platform.
*	Refer to the icon name
	Open file
ightharpoonup	Run tests in parallel.
<−>	Tools for creating Cortana dialog apps.
	Tools for creating Cortana dialog apps.
*	Tools for creating Cortana dialog apps.
1	Tools for creating Cortana dialog apps.
?>	Tools for creating Cortana dialog apps.
Î E	Used for opening the ink toolbar that has image editing tools like pen, ruler, etc.
<u> </u>	Used for XAML experience. The In-App toolbar shows up on top of the running app.
00	Select all command in file explorer.
	Invert selection command in file explorer.
	Select none command in file explorer.
	Tools for creating Cortana dialog apps.

http://localhost:3000/ 233/455

Slot	{X}	Tools for creating Cortana dialog apps.	
SlotReference	₹ ∀ }	Tools for creating Cortana dialog apps.	
TableToFile		Export data from table to a file.	
TrackFocusedElement	F	Highlights the focused XAML DOM element in treeview.	
Transfer Download	$\underline{\downarrow}$	Download	
TransferUpload		Upload	
UserTrigger	25	User defined trigger.	
Utterance	Q ¹⁾⁾	Tools for creating Cortana dialog apps.	
ColumnOption	醇	Column options like add, remove, reorder, sort, etc.	
ShiftToLeft	⊬	Shift table cells to left to fill up empty cells.	
ConnectPlugged	Ø	Connected state	
ConnectUnplugged	R _Q	Disconnected state	
CodeAnalysisInFolder	歐	Toggle solution wide code analysis	
EncryptionKey	₽ <u>₽</u>	Always encrypted experience in SSDT	
MasterKey	F	Always encrypted experience in SSDT	
VirtualHardDrive	뭋	*.vhd file type	
TestCoveredException	×!	Status icon shown in Code Editor to indicate this line of code will throw exception.	

http://localhost:3000/ 234/455

-1	4		
ThisLine	<u>>_</u>	Used in Go To feature to indicate line number type of filter.	
ExternalFiles		Used in Go To feature to indicate search	
External riles	国工	scope is extended to external sources.	
CurrentFile		Used in Go To feature to indicate search	
- Current ne	ركار	scope is limited to the current document.	
AddImmediateWindow	さつ	Used in VS Code terminal panel to add a	
		new terminal process.	
RemovelmmediateWindow	ightarrow	Used in VS Code terminal panel to	
		remove a terminal process.	
AzureSubscription		Used in Cloud Explorer resource treeview.	
		This icon matches Azure portal icon.	
SolutionFolderSwitch		Used in Solution Explorer toolbar to switch between Solutuion view and	
	—,	Folder view.	
		Used on Start Page for remote version	
RemoteRepositoryFolder	% -⊗	controlled folder.	
FunandS cons	\mathfrak{R}	Used in intelliSense Go To filter toolbar to	
ExpandScope	ETT.	expand filter scope.	
MailOpen		Used in Feedback Console for already	
WallOpen		read discussion threads.	
SignIn	\rightarrow	Used in Feedback Console for signing in.	
Release	<u> </u>	Used for publishing content to Azure.	
	———	Used in toolbox for Cortana dialog	
DiagramReference	河西	project.	
	TT		
TestImpact	672	Used for Test Impact status bar indicator.	
SpinButton	\$	Used for Excel VB Editor toolbox	
Spinbatton	▼	Osed for Excer VD Editor toolbox	
TabPage	-	Used for Excel VB Editor toolbox	
-			
Education		Used in VS Installer start page.	

http://localhost:3000/ 235/455

SearchAndApps	Ģ	Used in VS Installer start page.
ShoppingBag		Used in VS Installer start page.
StoreLegacy		Used in VS Installer start page.
NewLayerDiagram	****	New Dependency Validation Diagram menu item icon.
ResultToCSV		Export data to CSV file.
ResultToJSON	? }	Export data to JSON file.
CPU	:::::::::::::::::::::::::::::::::::::::	Used for diagnostics CPU usage.
SnapshotPoint	TO	Used for diagnostics capture memory snapshot point.
Compliant		Used as a badge on plug-in icons to indicate this plug-in is compliant to best practices.
Cookiecutter	?	Used in PTVS Cookiecutter Explorer treeview.
CookiecutterTemplate		Used in PTVS Cookiecutter Explorer treeview.
CookiecutterTemplateOK		Used in PTVS Cookiecutter Explorer treeview.
CookiecutterTemplateUpdate	Co	Used in PTVS Cookiecutter Explorer treeview.
CookiecutterTemplateWarning	<u></u>	Used in PTVS Cookiecutter Explorer treeview.
NewCookiecutter	*>	Used in PTVS Cookiecutter Explorer treeview.
DialogFile		Dialog file in Cortana dialog flowchart.
AddDockerSupport		Used in context menu to convert a project to Docker container.

http://localhost:3000/ 236/455

DevOpsVersionControl		The DevOps plugin.
StepBack	•	Used in intelliTrace debugging for stepping a back to previous line.
Input	→	Often used together with Output.
Vertices		Used in SQL Job Graph to represent processed vertex count.
RowUpdating		Used in SQL Job Graph to represent updated row count.
LinkRemoved	€ x	Used in Azure Storage Explorer for removed quick access link.
TestCoveredFailing	×	Used in Live Unit Test to show test result in code editor margin to indicate this line of code is failing tests.
TestCoveredPassing	✓	Used in Live Unit Test to show test result in code editor margin to indicate this line of code is passing tests.
TestNotCovered	-	Used in Live Unit Test to show test result in code editor margin to indicate this line is not covered by test.
ResultToSpreadsheet	→ `` L⊞	Used in VS Code SQL data tools for saving result to Excel format.
LinkHorizontal	ග	Used in designer view to lock scale proportion horizontally.
LinkVertical	S	Used in designer view to lock scale proportion vertically.
ConnectPlugged	Ø	Indicate current connection status.
ConnectUnplugged	œ _Q	Indicate current connection status.
StatusInfoTip	i	Used inline with information text.
Double	1.2	Data type icon for double.
Integer		Data type icon for integer.

	123		
Guid	RO	Data type icon for GUID or key.	
TrueFalse	×	Data type icon for boolean.	
StepBackwards	6	Only step backwards once, used in Diagnostics hub.	
StepForward	~	Only step forward once, used in Diagnostics hub.	
BreakOnFailures		Used in Unit Testing toolbar for break on test failures.	
BoostTest	*2	Boost Test adaptor icon used in extension gallery and new project/item template dialog.	
CatchTest	©	Catch Test adaptor icon used in extension gallery and new project/item template dialog.	
CTest	π CT	CTest adaptor icon used in extension gallery and new project/item template dialog.	
GoogleTest	G	Google Test adaptor icon used in extension gallery and new project/item template dialog.	
MSTest	MS)	MSTest adaptor icon used in extension gallery and new project/item template dialog.	

Displaying 4018 Visual Studio icons.

http://localhost:3000/ 238/455